

3 - TeSys protection components: motor circuit-breakers

TeSys GV thermal-magnetic motor circuit-breakers

<i>Selection guide</i>	<i>page 3/2</i>
■ Presentation	page 3/6
■ Characteristics	page 3/8
■ References	page 3/46
■ Dimensions, mounting	page 3/66
■ Schemes	page 3/76

TeSys GV magnetic motor circuit-breakers

<i>Selection guide</i>	<i>page 3/4</i>
■ Characteristics	page 3/14
■ References	page 3/52
■ Dimensions, mounting	page 3/78
■ Schemes	page 3/83

3

TeSys GB2 thermal-magnetic circuit breakers for the protection of control circuits, solenoid valves and transformers

<i>Selection guide</i>	<i>page 3/84</i>
■ Presentation	page 3/86
■ Characteristics	page 3/87
■ References	page 3/90
■ Dimensions	page 3/91
■ Schemes	page 3/91

TeSys protection components

Thermal-magnetic motor circuit-breakers

Applications

Protection of motors against short-circuits and overloads



3

Protection of motors with high current peak on starting



3

Tripping threshold on short-circuit

13 In

Standard motor power ratings in AC-3, 415 V

Up to 15 kW Up to 30 kW 37 kW

Operational current at 415 V

0.1...32 A 9...65 A 56...80 A

Breaking capacity at 415 V (Icu) to IEC 60947-2

10...100 kA 35...100 kA 50...100 kA 15 kA

Door interlock mechanism

Without With With Without

Circuit-breaker type

GV2 ME GV2 P GV3 P GV3 ME80

Pages

3/46 and 3/47 3/48 3/48 3/48

20 In

7.5...110 kW

Up to 11 kW

12...220 A

0.25...23 A

35 and 36 kA

70 kA

15...100 kA

With

With

GV7 RE

GV7 RS

GV2 RT

3/49

3/50 and 3/51

TeSys protection components

Magnetic motor circuit-breakers

Applications

Protection of motors

Magnetic circuit-breakers provide short-circuit protection. They must be combined with thermal overload relays to provide motor overload protection.



3



3

Tripping threshold on short-circuit

13 In

Standard motor power ratings in AC-3, 415 V

Up to 15 kW

Operational current at 415 V

0.4...32 A

Breaking capacity at 415 V (Icu) to IEC 60947-2

10...100 kA

35...100 kA

Door interlock mechanism

With

Circuit-breaker type

GV2 LE

GV2 L

Pages

3/52

3/53

Up to 30 kW

37 kW

0.37...250 kW

25...65 A

80 A

1.5...500 A

50...100 kA

35 kA

25.7 and 150 kA

35.7...150 kA

With

With

With

GV3 L

GK3 EF80

NS 80

NS 100 to
NS 250NS 400 and
NS 630


3/53

3/53


Please consult the Schneider Electric catalogue - Low Voltage Distribution

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV2, GV3 and GV7



GV2 ME
with screw clamp
terminals




GV2 ME
with spring terminals
connections

3




GV3 P

EverLink®



GV2 P



GV7 R

Presentation

GV2 ME, GV2 P, GV3 ME, GV3 P and GV7 R motor circuit-breakers are 3-pole thermal-magnetic circuit-breakers **specifically designed for the control and protection of motors**, conforming to standards IEC 60947-2 and IEC 60947-4-1.

Connection GV2

GV2 ME and GV2 P circuit-breakers are designed for connection by screw clamp terminals.

Circuit-breaker GV2 ME can be supplied with lugs or spring terminal connections. Spring terminal connections ensure secure, permanent and durable clamping that is resistant to harsh environments, vibration and impact and are even more effective when conductors without cable ends are used. Each connection can take two independent conductors.

GV3

GV3 circuit-breakers feature connection by BTR screws (hexagon socket head), tightened using a n° 4 Allen key.

This type of connection uses the **EverLink®** system with creep compensation (1) (Schneider Electric patent).

This technique makes it possible to achieve accurate and durable tightening torque, in order to avoid cable creep.

GV3 circuit-breakers are also available with connection by lugs. This type of connection meets the requirements of certain Asian markets and is suitable for applications subject to strong vibration, such as railway transport.

GV7

GV7 circuit-breakers: with connection by screw clamp terminals (for bars and lugs) and by clip-on connectors.

Operation

Control is manual and local when the motor circuit-breaker is used on its own. Control is automatic and remote when it is associated with a contactor.

GV2 ME and GV3 ME80

Pushbutton control.

Energisation is controlled manually by operating the Start button "I" 1.

De-energisation is controlled manually by operating the Stop button "O" 2, or automatically by the thermal-magnetic protection elements or by a voltage trip attachment.

GV2 P, GV3 P and GV7 R

- Control by rotary knob: for GV2 P and GV3 P
- Control by rocker lever: for GV7 R.

Energisation is controlled manually by moving the knob or rocker lever to position "I" 1.

De-energisation is controlled manually by moving the knob or rocker lever to position "O" 2.

De-energisation due to a fault automatically places the knob or rocker lever in the "Trip" position 3.

Re-energisation is possible only after having returned the knob or rocker lever to position "O".

(1) Creep: normal crushing phenomenon of copper conductors, that is accentuated over time.

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV2, GV3 and GV7

Presentation (continued)

Protection of motors and personnel

Motor protection is provided by the thermal-magnetic protection elements incorporated in the motor circuit-breaker.

The **magnetic** elements (short-circuit protection) have a non-adjustable tripping threshold, which is equal to 13 times the maximum setting current of the thermal trips.

The **thermal** elements (overload protection) include automatic compensation for ambient temperature variations.

The rated operational current of the motor is displayed by means of a graduated knob 4. Personnel protection is also provided. All live parts are protected against direct finger contact from the front panel.

The addition of an undervoltage trip allows the circuit-breaker to be de-energised in the event of an undervoltage condition. The user is therefore protected against sudden starting of the machine when normal voltage is restored, since the Start button "I" has to be pressed to restart the motor.

With the addition of a shunt trip, de-energisation of the unit can be remotely controlled.

The operators on both open-mounted and enclosed motor circuit-breakers can be locked in the Stop position "O" by up to 4 padlocks.

Because they are suitable for isolation, these circuit-breakers, in the open position, provide an adequate isolation distance and indicate the actual position of the moving contacts by the position of the operators.

Special features

These motor circuit-breakers are easily installed in any configuration thanks to their universal fixing arrangement: screw fixing or clip-on mounting on symmetrical, asymmetrical or combination rails.

Characteristics

TeSys protection components

Thermal-magnetic motor circuit-breakers

Environment										
Circuit-breaker type										
Conforming to standards		GV2 ME IEC 60947-1, 60947-2, 60947-4-1, EN 60204, UL 508, CSA C 22.2 n° 14-05, NF C 63-650, 63-120, 79-130, VDE 0113, 0660	GV2 P IEC/EN 60947-1, 60947-2, DIN EN 60947-2, 60947-4-1, UL 508 type E, CSA C 22.2 n° 14-05 type E	GV3 P IEC/EN 60947-1, 60947-2, DIN EN 60947-2, 60947-4-1, UL 508 type E, CSA C 22.2 n° 14-05 type E	GV3 ME80 IEC 60947-1, 60947-2, 60947-4-1, EN 60947-1, 60947-2, 60947-4-1, NF C 63-650, NF C 63-120, 79-130, VDE 0113, 0660	GV7 R IEC 60947-1, 60947-2, 60947-4-1, EN 60947-1, 60947-2, 60947-4-1, NF C 63-650, NF C 63-120, 79-130, VDE 0113, 0660				
Product certifications			UL, CSA, CCC, CEBC, GOST, TSE, BV, GL, LROS, DNV, PTB, EZU, SETI, RINA, ATEX	UL (1), CSA, PTB, EZU, GOST, TSE, DNV, LROS, GL, BV, RINA, CCC, ATEX	UL, CSA, CCC (pending), GOST, ATEX (pending)	UL, CSA, LROS	UL, DNV, CCC			
Protective treatment			"TH"	"TH"	"TC"	"TC"				
Degree of protection	Conforming to IEC 60529	Open mounted	IP 20	IP 20	IP 20	IP 405 with terminal shrouds				
In enclosure			GV2 M•01: IP 41 GV2 M•02: IP 55	-	GV3 PC01 and GV3 PC02: IP 55	GV3 CE01: IP 55	-			
Shock resistance	Conforming to IEC 60068-2-27		30 gn -11 ms	On: 15 gn -11 ms Off: 30 gn -11 ms	22 gn - 20 ms	15 gn -11 ms				
Vibration resistance	Conforming to IEC 60068-2-6		5 gn (5...150 Hz)	4 gn (5...300 Hz)	2.5 gn (0...25 Hz)	2.5 gn (25 Hz)				
Ambient air temperature	Storage	-40...+ 80	-40...+ 80	-40...+ 80	-40...+ 80	-55...+ 95				
Operation	Open mounted	-20...+ 60	-20...+ 60	-20...+ 60 (2)	-20...+ 60	-25...+ 70				
	In enclosure	-20...+ 40	-20...+ 40	-20...+ 40	-20...+ 40	-				
Temperature compensation	Open mounted	-20...+ 60	-20...+ 60	-20...+ 60	-20...+ 60	-25...+ 55 (3)				
In enclosure	-20...+ 40	-20...+ 40	-20...+ 40	-20...+ 40	-20...+ 40	-				
Flame resistance	Conforming to IEC 60695-2-1		960	960	960	960				
Maximum operating altitude	m		2000	3000	3000	2000				
Suitable for isolation	Conforming to IEC 60947-1 § 7-1-6		Yes	Yes	-	Yes				
Resistance to mechanical impact	J	0.5	0.5	10	0.5	0.5				
IK 04			IK 09 (in enclosure)		-	-				
Sensitivity to phase failure			Yes, conforming to IEC 60947-4-1 § 7-2-1-5-2							
Technical characteristics			GV2 ME	GV2 P	GV2 RT	GV3 P	GV3 ME80	GV7 R•20...R•100	GV7 R•150	GV7 R•220
Utilisation category	Conforming to IEC 60947-2	A	A	A	A	A	A			
Rated operational voltage (Ue)	Conforming to IEC 60947-4-1	AC-3	AC-3	AC-3	AC-3	AC-3				
	V	690		690	690	690				
Rated insulation voltage (Ui)	Conforming to IEC 60947-2	V	690		690	690	750			
Rated voltage	Conforming to CSA C22-2 n° 14, UL 508	V	600		600	600 (B600)	600			
Rated operational frequency	Conforming to IEC 60947-4-1	Hz	50/60		50/60	50/60	50/60			
Rated impulse withstand voltage (Uimp)	Conforming to IEC 60947-2	kV	6		6	6	8			
Total power dissipated per pole		W	2.5		8	8	5	8.7	14.5	
Mechanical durability (C.O.: Close, Open)		C.O.	100 000		50 000	30 000	50 000	40 000	20 000	
Electrical durability for AC-3 duty	440 V In/2 440 V In	C.O.	100 000		-	30 000	50 000	40 000	20 000	
Duty class (maximum operating rate)		C.O./h	25		25	25	25			
Maximum conventional rated thermal current (ith)	Conforming to IEC 60947-4-1	A	0.16...32	0.16...32	0.40...23	13...65	80	12...100	150	220
Rated duty	Conforming to IEC 60947-4-1	Continuous duty								

(1) UL 508 type E for **GV2 P•H7**

(2) Leave a space of 9 mm between 2 circuit-breakers: either an empty space, or side mounting add-on contact blocks. Side by side mounting is possible up to 40 °C.

(3) For operation up to 70 °C, please consult your Regional Sales Office.

References:
pages 3/46 to 3/51




Dimensions:
pages 3/66 to 3/75

Schemes:
pages 3/76 and 3/77

Characteristics (continued)

TeSys protection components

Thermal-magnetic motor circuit-breakers

Mounting characteristics		
Operating position		Without derating, in relation to normal vertical mounting plane (1)
		
Connection characteristics		
Connection to screw clamp terminals or spring terminals		
Bare cables		
		
Circuit-breaker type		
Connection to screw clamp terminals (2)		
(Max. number of conductors x c.s.a.)		
Solid cable	mm ²	2 x 1 2 x 6 2 x 1 2 x 6 2 x 1 1 x 25 and 1 x 35 1 x 2.5 1 x 35
Flexible cable without cable end	mm ²	2 x 1.5 2 x 6 2 x 1.5 2 x 6 2 x 1 1 x 25 and 1 x 35 1 x 2.5 2 x 16
Flexible cable with cable end	mm ²	2 x 1 2 x 4 2 x 1 2 x 4 2 x 1 1 x 25 and 1 x 35 1 x 2.5 2 x 16
Tightening torque		
N.m	1.7	1.7 1.7 1.7 5 5: 25 mm ² 8: 35 mm ² 5 5
Connection to spring terminals Number of conductors x c.s.a.		
Solid cable	mm ²	2 x 1 (3) 2 x 6 - - - -
Flexible cable without cable end	mm ²	2 x 1.5 (3) 2 x 4 - - - -
Connection by bars or lugs		
Bars or lugs		
		
Circuit-breaker type		
GV2 ME•6		
Pitch	mm	13.5 17.5 35 35 35
Without spreaders	mm	- - 45 45 45
With spreaders	mm	- - - -
Bars or cables with lugs		
e	mm	≤ 6 ≤ 6 ≤ 6 ≤ 6 ≤ 6
L	mm	≤ 9.5 ≤ 13.5 ≤ 25 ≤ 25 ≤ 25
L'	mm	≤ 9.5 ≤ 16.5 - - -
d	mm	≤ 10 ≤ 10 ≤ 10 ≤ 10 ≤ 10
Screws		
Tightening torque	N.m	1.7 6 10 10 15 15
Bare cables (copper or aluminium) with connectors		
Height (h)	mm	- - 20 20 20
C.s.a.	mm ²	- - - 1.5...95 1.5...95 1.5...185
Tightening torque	N.m	- - - 15 15 15

(1) When mounting on a vertical rail, fit a stop to prevent any slippage.

(2) For motor circuit-breakers **GV3 P•BTR** hexagon socket head screws, **EverLink®** system. Require use of an insulated Allen key, in compliance with local electrical wiring regulations.

(3) For cross-sections 1 to 1.5 mm², the use of an **LA9 D99** cable end reducer is recommended.

References:
pages 3/46 to 3/51

Dimensions:
pages 3/66 to 3/75

Schemes:
pages 3/76 and 3/77

Characteristics

TeSys protection components

Thermal-magnetic motor circuit-breakers GV2 ME and GV2 P

Characteristics (continued)

TeSys protection components

Thermal-magnetic motor circuit-breakers GV2 ME and GV2 P

Breaking capacity of GV2 ME and GV2 P

Circuit-breaker type			A	GV2 ME								GV2 P										
				01 to 06	07	08	10	14	16	20	21 & 22	32	01 to 06	07	08	10	14	16	20	21 & 22	32	
Rating			A	0.1 to 1.6	2.5	4	6.3	10	14	18	23 & 25	32	0.1 to 1.6	2.5	4	6.3	10	14	18	23 & 25	32	
Breaking capacity conforming to IEC 60947-2	230/240 V	Icu	kA	★	★	★	★	★	★	★	50	50	★	★	★	★	★	★	★	★	★	
		Ics % (1)		★	★	★	★	★	★	★	100	100	★	★	★	★	★	★	★	★	★	
	400/415 V	Icu	kA	★	★	★	★	★	15	15	15	10	★	★	★	★	★	★	★	50	50	
		Ics % (1)		★	★	★	★	★	50	50	40	50	★	★	★	★	★	★	★	50	50	
	440 V	Icu	kA	★	★	★	50	15	8	8	6	6	★	★	★	★	★	★	★	50	20	
		Ics % (1)		★	★	★	100	100	50	50	50	50	★	★	★	★	★	★	★	75	75	
	500 V	Icu	kA	★	★	★	50	10	6	6	4	4	★	★	★	★	★	★	★	50	42	
		Ics % (1)		★	★	★	100	100	75	75	75	75	★	★	★	★	★	★	★	100	75	
	690 V	Icu	kA	★	3	3	3	3	3	3	3	3	★	8	8	6	6	6	6	4	4	
		Ics % (1)		★	75	75	75	75	75	75	75	75	★	100	100	100	100	100	100	100	100	
Associated fuses (if required) if Isc > breaking capacity Icu conforming to IEC 60947-2		230/240 V	aM	A	★	★	★	★	★	★	80	80	★	★	★	★	★	★	★	★	★	
			gG	A	★	★	★	★	★	★	100	100	★	★	★	★	★	★	★	★	★	
		400/415 V	aM	A	★	★	★	★	★	63	63	80	80	★	★	★	★	★	★	★	100	100
			gG	A	★	★	★	★	★	80	80	100	100	★	★	★	★	★	★	★	125	125
		440 V	aM	A	★	★	★	50	50	50	50	63	63	★	★	★	★	★	★	★	50	63
			gG	A	★	★	★	63	63	63	63	80	80	★	★	★	★	★	★	★	63	80
		500 V	aM	A	★	★	★	50	50	50	50	50	50	★	★	★	★	★	★	★	50	50
			gG	A	★	★	★	63	63	63	63	63	63	★	★	★	★	★	★	★	63	63
		690 V	aM	A	★	16	25	32	32	40	40	40	40	★	20	25	40	40	50	50	50	50
			gG	A	★	20	32	40	40	50	50	50	50	★	25	32	50	50	63	63	63	63

★ > 100 kA.

Breaking capacity of GV2 ME and GV2 P (used in association with current limiter GV1 L3)

- Cable c.s.a. protected
 - (1) As % of I_{cu}
 - (2) Cable c.s.a. not protected
 - (3) With limiter I_A91B920

Characteristics

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV3 P and GV3 ME80

3

Breaking capacity of GV3 P and GV3 ME80										
Motor circuit-breaker type			GV3 P							
			13	18	25	32	40	50	65	GV3 ME80
Rating	A	13	18	25	32	40	50	65	80	
Breaking capacity conforming to IEC 60947-2	230/240 V	Icu	kA	100	100	100	100	100	100	100
		Ics % (1)		100	100	100	100	100	100	100
	400/415 V	Icu	kA	100	100	100	50	50	50	15
		Ics % (1)		100	100	100	100	100	100	50
	440 V	Icu	kA	50	50	50	50	50	50	10
		Ics % (1)		100	100	100	100	100	100	60
	500 V	Icu	kA	12	12	12	12	12	12	4
		Ics % (1)		50	50	50	50	50	50	100
	690 V	Icu	kA	6	6	6	6	6	6	2
		Ics % (1)		50	50	50	50	50	50	100
Associated fuses, if required if Isc > breaking capacity Icu	230/240 V	aM	A	★	★	★	★	★	★	★
		gG	A	★	★	★	★	★	★	★
	415 V	aM	A	★	★	★	★	125	125	125
		gG	A	★	★	★	★	160	160	160
	440 V	aM	A	63	80	125	125	125	125	315
		gG	A	80	100	160	160	160	160	400
	500 V	aM	A	63	63	63	63	80	80	200
		gG	A	80	80	80	80	100	100	250
	690 V	aM	A	50	50	50	50	63	63	200
		gG	A	63	63	63	63	80	80	250

* Fuse not required: breaking capacity Icn > Isc.

(1) As % of Icu.

Characteristics

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV7 R

3

Breaking capacity of GV7 R									
Circuit-breaker type			GV7						
			RE20...RE100	RS20...RS100	RE150	RS150	RE220	RS220	
Rating	A		12...20 to 60...100		90...150	90...150	132...220	132...220	
Breaking capacity conforming to IEC 60947-2	230/240 V	Icu	kA	85	100	85	100	85	100
		Ics % (1)		100	100	100	100	100	100
	400/415 V	Icu	kA	36	70	35	70	35	70
		Ics % (1)		100	100	100	100	100	100
	440 V	Icu	kA	36	65	35	65	35	65
		Ics % (1)		100	100	100	100	100	100
	500 V	Icu	kA	18	50	30	50	30	50
		Ics % (1)		100	100	100	100	100	100
	690 V	Icu	kA	8	10	8	10	8	10
		Ics % (1)		100	100	100	100	100	100
Cable protection against thermal stress in the event of short-circuit (PVC insulated copper cables)	Minimum c.s.a. protected at 40 °C at Isc max.		4 mm ²		≤ 6 kA	≤ 6 kA	(2)	(2)	(2)
			6 mm ²		•	≤ 25 kA	(2)	(2)	(2)
			10...50 mm ²		•	•	•	•	•

(1) As % of Icu.

• Cable c.s.a. protected.

(2) Cable c.s.a. not protected.

Characteristics

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV3 P and GV3 ME80

3

Breaking capacity of GV3 P and GV3 ME80										
Motor circuit-breaker type			GV3 P							
			13	18	25	32	40	50	65	GV3 ME80
Rating	A	13	18	25	32	40	50	65	80	
Breaking capacity conforming to IEC 60947-2	230/240 V	Icu	kA	100	100	100	100	100	100	100
		Ics % (1)		100	100	100	100	100	100	100
	400/415 V	Icu	kA	100	100	100	50	50	50	15
		Ics % (1)		100	100	100	100	100	100	50
	440 V	Icu	kA	50	50	50	50	50	50	10
		Ics % (1)		100	100	100	100	100	100	60
	500 V	Icu	kA	12	12	12	12	12	12	4
		Ics % (1)		50	50	50	50	50	50	100
	690 V	Icu	kA	6	6	6	6	6	6	2
		Ics % (1)		50	50	50	50	50	50	100
Associated fuses, if required if Isc > breaking capacity Icu	230/240 V	aM	A	★	★	★	★	★	★	★
		gG	A	★	★	★	★	★	★	★
	415 V	aM	A	★	★	★	★	125	125	125
		gG	A	★	★	★	★	160	160	160
	440 V	aM	A	63	80	125	125	125	125	315
		gG	A	80	100	160	160	160	160	400
	500 V	aM	A	63	63	63	63	80	80	200
		gG	A	80	80	80	80	100	100	250
	690 V	aM	A	50	50	50	50	63	63	200
		gG	A	63	63	63	63	80	80	250

* Fuse not required: breaking capacity Icn > Isc.

(1) As % of Icu.

Characteristics

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV7 R

3

Breaking capacity of GV7 R									
Circuit-breaker type			GV7						
			RE20...RE100	RS20...RS100	RE150	RS150	RE220	RS220	
Rating	A		12...20 to 60...100		90...150	90...150	132...220	132...220	
Breaking capacity conforming to IEC 60947-2	230/240 V	Icu	kA	85	100	85	100	85	100
		Ics % (1)		100	100	100	100	100	100
	400/415 V	Icu	kA	36	70	35	70	35	70
		Ics % (1)		100	100	100	100	100	100
	440 V	Icu	kA	36	65	35	65	35	65
		Ics % (1)		100	100	100	100	100	100
	500 V	Icu	kA	18	50	30	50	30	50
		Ics % (1)		100	100	100	100	100	100
	690 V	Icu	kA	8	10	8	10	8	10
		Ics % (1)		100	100	100	100	100	100
Cable protection against thermal stress in the event of short-circuit (PVC insulated copper cables)	Minimum c.s.a. protected at 40 °C at Isc max.		4 mm ²		≤ 6 kA	≤ 6 kA	(2)	(2)	(2)
			6 mm ²		•	≤ 25 kA	(2)	(2)	(2)
			10...50 mm ²		•	•	•	•	•

(1) As % of Icu.

• Cable c.s.a. protected.


(2) Cable c.s.a. not protected.

Characteristics

TeSys protection components

Magnetic motor circuit-breakers
GV2 LE and GV2 L

3

Environment			
Circuit-breaker type	GV2 LE	GV2 L	
Conforming to standards		IEC 60947-1, 60947-2, EN 60204, NF C 63-650, NF C63-120, 79-130, VDE 0113, 0660.	
Product certifications	CSA, CCC	CSA, CCC, BV, DNV, GL, LROS, RINA	
Protective treatment	"TH"	"TH"	
Shock resistance	Conforming to IEC 60068-2-27	30 gn	30 gn
Vibration resistance	Conforming to IEC 60068-2-6	5 gn (5 to 150 Hz)	5 gn (5 to 150 Hz)
Ambient air temperature	Storage	°C -40...+80	-40...+80
	Operation	°C -20...+60	-20...+60
Flame resistance	Conforming to IEC 60695-2-1	°C 960	960
Maximum operating altitude	m	2000	2000
Operating position			
Connection (Max. number of conductors x c.s.a.)	Solid cable	mm² Min. 2 x 1 Max. 2 x 6	mm² Min. 2 x 1 Max. 2 x 6
	Flexible cable without cable end	mm² 2 x 1.5	2 x 6
	Flexible cable with cable end	mm² 2 x 1	2 x 4
Tightening torque	N.m	1.7	1.7
Suitable for isolation	Conforming to IEC 60947-1 § 7-1-6	Yes	Yes
Resistance to mechanical impact	J	0.5	0.5
Technical characteristics			
Utilisation category	Conforming to IEC 60947-2	A	A
	Conforming to IEC 60947-4-1	AC-3	AC-3
Rated operational voltage (Ue)	V	690	690
Rated insulation voltage (Ui)	V	690	690
Rated operational frequency	Hz	50/60	50/60
Rated impulse withstand voltage (Uimp)	kV	6	6
Total power dissipated per pole	W	1.8	1.8
Mechanical durability (C.O.: Closing, Opening)	C.O.	100 000	100 000
Electrical durability for AC-3/415V duty (C.O.: Closing, Opening)	C.O.	100 000	100 000
Duty class (maximum operating rate)	C.O./h	40	40
Rated duty	Conforming to IEC 60947-4-1	Continuous duty	Continuous duty

Characteristics (continued)

TeSys protection components

Magnetic motor circuit-breakers
GV2 LE and GV2 L

3

Circuit-breaker type		Rating	GV2 LE								GV2 L										
			0.4	2.5	4	6.3	10	14	16	20	25	32	0.4	1.6	4	6.3	10	14	16		
	230/240 V	lcu	kA	★	★	★	★	★	★	★	50	50	★	★	★	★	★	★	50	50	
		lcs % (1)		★	★	★	★	★	★	★	100	100	★	★	★	★	★	★	100	100	
	400/415 V	lcu	kA	★	★	★	★	★	★	15	15	15	10	★	★	★	★	★	50	50	
		lcs % (1)		★	★	★	★	★	★	50	50	40	50	★	★	★	★	★	50	50	
	440 V	lcu	kA	★	★	★	50	15	8	8	6	6	★	★	★	★	★	20	20		
		lcs % (1)		★	★	★	100	100	50	50	50	50	★	★	★	★	★	75	75		
	500 V	lcu	kA	★	★	★	50	10	6	6	4	4	★	★	★	★	★	10	10		
		lcs % (1)		★	★	★	100	100	75	75	75	75	★	★	★	★	★	100	100		
	690 V	lcu	kA	★	3	3	3	3	3	3	3	3	★	4	4	4	4	4	4	4	
		lcs % (1)		★	75	75	75	75	75	75	75	75	★	100	100	100	100	100	100	100	
	230/240 V	aM	A	★	★	★	★	★	★	★	★	80	80	★	★	★	★	★	★	100	100
		gG	A	★	★	★	★	★	★	★	★	100	100	★	★	★	★	★	★	125	125
	400/415 V	aM	A	★	★	★	★	★	★	63	63	80	80	★	★	★	★	★	80	100	100
		gG	A	★	★	★	★	★	★	80	80	100	100	★	★	★	★	★	100	125	125
	440 V	aM	A	★	★	★	50	50	50	50	63	63	★	★	★	★	★	50	63	80	80
		gG	A	★	★	★	63	63	63	63	80	80	★	★	★	★	★	63	80	100	100
	500 V	aM	A	★	★	★	50	50	50	50	50	50	★	★	★	★	★	50	50	50	50
		gG	A	★	★	★	63	63	63	63	63	63	★	★	★	★	★	63	63	63	63
	690 V	aM	A	★	16	25	32	32	40	40	40	40	★	20	25	40	40	50	50	50	50
		gG	A	★	20	32	40	40	50	50	50	50	★	25	32	50	50	63	63	63	63
				●	●	●	≤10	≤6	(2)	(2)	(2)	(2)	●	●	●	≤10	≤6	(2)	(2)	(2)	
				●	●	●	≤20	≤10	(2)	(2)	(2)	(2)	●	●	●	●	●	≤20	≤10	(2)	(2)
				●	●	●	●	●	(2)	(2)	(2)	(2)	●	●	●	●	●	●	●	(2)	
				●	●	●	●	●	(2)	(2)	(2)	(2)	●	●	●	●	●	●	●	(2)	

Cable protection against thermal stress in the event of short-circuit (PVC insulated copper cables)
Minimum c.s.a. protected at 40 °C and at lsc max.

★ > 100 kA
● Cable c.s.a. protected

(1) As % of lcu


(2) Cable c.s.a. not protected

Characteristics

TeSys protection components

Magnetic motor circuit-breakers
GV3 L and GK3 EF80

3

Environment					
Circuit-breaker type		GV3 L		GK3 EF80	
Conforming to standards		IEC/EN 60947-1, 60947-2		IEC 60947-2, EN 60204	
Protective treatment		"TH"		"TC"	
Degree of protection		Conforming to IEC 60529		IP 20	
Shock resistance		Conforming to IEC 60068-2-27		On : 15 gn -11 ms Off : 30 gn -11 ms	
Vibration resistance		Conforming to IEC 60068-2-6		22 gn -20 ms	
Flame resistance		Conforming to IEC 60695-2-1		4 gn (5...300 Hz)	
Ambient air temperature		Storage °C 960		960	
Operation		°C -40...+ 80		-40...+ 80	
Maximum operating altitude		m 3000		3000	
Operating position		Without derating, in relation to normal vertical mounting plane (2)			
				Any position	
Connection (Max. number of conductors x c.s.a.)					
Solid cable		mm² Min. 2 x 1		Max. 1 x 25 1 x 35	
Flexible cable without cable end		mm² 2 x 1		1 x 25 1 x 35	
Flexible cable with cable end		mm² 2 x 1		1 x 25 or 1 x 35	
Tightening torque		N.m 5		5 : 25 mm² 8 : 35 mm²	
Suitable for isolation conforming to IEC 60947-1 § 7-1-6		Yes		Yes	
Technical characteristics					
Rated insulation voltage (Ui)		Conforming to IEC 60947-2		V 690	
Rated impulse withstand voltage (Ui imp)		Conforming to IEC 60947-2		kV 6	
Rated operational voltage (Ue)		Conforming to IEC 60947-2		V 690	
Rated operational frequency		Hz 50/60		50...60	
Electrical durability for AC-3/415V duty (C.O.: Close - Open)		C.O. 50 000		1500	
Mechanical durability (C.O.: Closing, Opening)		C.O. 50 000		20 000	
Maximum operating rate		C.O./h 25		40	
Operating threshold of magnetic trips		14 l max		3363	
Utilisation category		Conforming to IEC 60947-2		A	

(1) Leave a space of 9 mm between 2 circuit-breakers: either an empty space or side-mounting add-on contact blocks. Side by side mounting is possible up to 40 °C.

(2) When mounting on a vertical rail, fit a stop to prevent any slippage.

Characteristics (continued)

TeSys protection components

Magnetic motor circuit-breakers
GV3 L and GK3 EF80

3

Breaking capacity of GV3 L and GK3 EF80								
Type	230/240 V Icu	kA	GV3 L25	GV3 L32	GV3 L40	GV3 L50	GV3 L65	GK3 EF80
Breaking capacity of the circuit-breaker only or of the circuit-breaker combined with a thermal overload relay	Ics % (1)		100	100	100	100	100	40
400/415 V Icu	kA	100	100	50	50	50	50	35
	Ics % (1)		100	100	100	100	100	25
440 V Icu	kA	50	50	50	50	50	50	25
	Ics % (1)		100	100	100	100	100	30
500 V Icu	kA	12	12	12	12	12	12	15
	Ics % (1)		50	50	50	50	50	30
690 V Icu	kA	6	6	6	6	6	6	6
	Ics % (1)		50	50	50	50	50	50
230/240 V aM	A	★	★	★	★	★	★	200
	gG	A	★	★	★	★	★	315
415 V aM	A	★	★	★	★	★	★	125
	gG	A	★	★	★	★	★	250
440 V aM	A	63	80	125	125	125	125	160
	gG	A	80	100	160	160	160	250
500 V aM	A	63	63	63	63	63	80	160
	gG	A	80	80	80	80	100	200
690 V aM	A	50	50	50	50	50	63	125
	gG	A	63	63	63	63	80	160
Use of circuit-breakers without fuses								
Minimum cable length (in metres) limiting the maximum short-circuit current to 35 kA maximum, so enabling breakers GK3 EF80 to be used without fuses								
Cable c.s.a.		mm²	≤ 25	35	50	70	95	120
Isc (rms) 3-phase, incoming (Ue = 415 V)		50 kA	m	5	6	8	10	13
		45 kA	m	5	5	7	8	10
		40 kA	m	5	5	5	5	8
		37 kA	m	5	5	5	5	5

* Fuse not required: breaking capacity $Icn > Isc$.

(1) As % of Icu

Characteristics

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV2, GV3 P and GV3 L
Auxiliary contacts

3


(1) For application example of fault signalling contact and short-circuit signalling contact, see page 3/76.
(2) Add an RC circuit type LA4 D to the load terminals. see page 5/81.

Characteristics

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV3 ME80
Auxiliary contacts

3

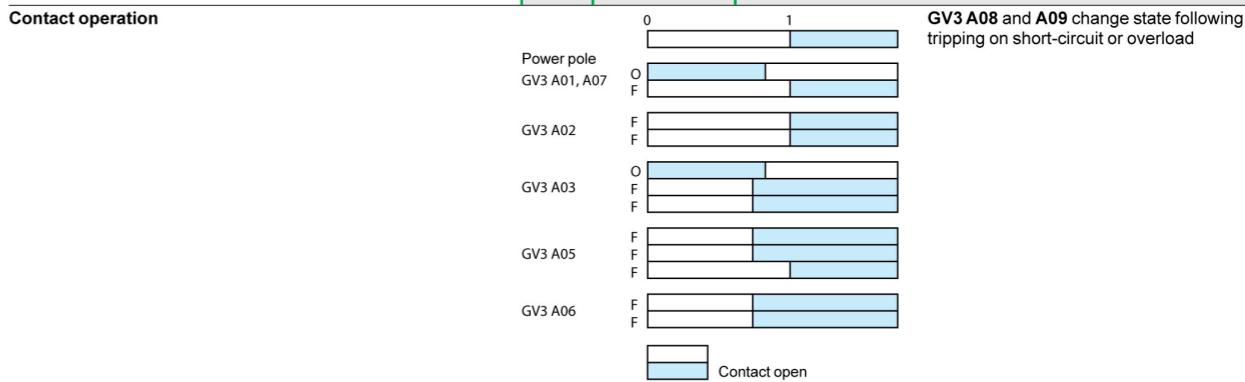

References: **Schemes:**

Characteristics

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV7
Auxiliary contacts

3

Auxiliary contact characteristics

Type of contacts		GV7 AE11										GV7 AB11										
Rated insulation voltage(Ui)	Conforming to IEC 60947-1 (associated insulation coordination)	V	690									690										
Conventional thermal current (Ith)	Conforming to IEC 60947-5-1	A	6									6										
Mechanical durability (C.O.: Close - Open)	C.O.	50 000										50 000										
Operational current conforming to IEC 60947-5-1 a.c. operation	Rated operational voltage (Ue)	V	AC-12 or AC-15. 50 000 C.O. 24 48 110 230/240 380/415 440 690									AC-12 or AC-15. 50 000 C.O. 24 48 110 230/240 380/415 440 690										
	Rated operational current (Ie)	AC-12	A	6	6	6	6	6	6	5	5	5	5	5	5	5	5	5	5	5	5	
		AC-15	A	6	6	5	4	3	3	0.1	5	5	4	3	2.5	2.5	2.5	0.1				
Operational current conforming to IEC 60947-5-1 d.c. operation	Rated operational voltage (Ue)	V	DC-12 or DC-14. 50 000 C.O. 24 48 110 250									DC-12 or DC-14. 50 000 C.O. 24 48 110 250										
	Rated operational current (Ie)	DC-12	A	2.5	2.5	0.8	0.3	2	2	0.5	—											
		DC-14	A	1	0.2	0.5	0.03	0.5	0.1	0.25	—											
Minimum operational conditions d.c. operation	V	17										12										
	mA	5										5										
Short-circuit protection			By GB2 CB ● circuit-breaker (rating according to operational current for Ue ≤ 415 V) or gG fuse, 10 A max.																			
Cabling	Solid cable	mm ²	1 x 1.5 conductor									1 x 1.5 conductor										
	Flexible cable without cable end	mm ²	1 x 1.5 conductor									1 x 1.5 conductor										
	Flexible cable with cable end	mm ²	1 x 1.5 conductor									1 x 1.5 conductor										

Characteristics

TeSys protection components

Magnetic motor circuit-breakers
GK3 EF80
Auxiliary contacts

3

Characteristics of Start-Stop and fault signalling contacts

Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V	500																			
Rated operational voltage (Ue)	Conforming to IEC 60947-1	V	500																			
Conventional thermal current (Ith)	Conforming to IEC 60947-5-1	A	6																			
Operational power and current conforming to IEC 60947-5-1 a.c. operation (C.O.: Close - Open)	Rated operational voltage (Ue)	V	AC-15. 20 000 C.O. 48 110/127 220/240 380/415 440 500																			
	Operational power	VA	360	500	800	850	700	700														
	Occasional breaking and making capacities	VA	4000	12 000	20 000	20 000	15 000	15 000														
	Rated operational current (Ie)	A	6	4.5	3.5	2.2	1.5	1.5														
Operational power and current conforming to IEC 60947-5-1 d.c. operation (C.O.: Close - Open)	Rated operational voltage (Ue)	V	DC-13. 1000 C.O. 24 48 60 110 220																			
	Operational power	W	180	240	180	140	120	120														
	Occasional breaking and making capacities	W	240	280	240	210	180	180														
	Rated operational current (Ie)	A	6	5	3	1.3	0.5	0.5														
Short-circuit protection			By GB2 CB ● circuit-breaker or gG fuse, 6A max																			
Cabling	Solid cable	mm ²	1 x 1...4 conductor																			
	Flexible cable without cable end	mm ²	1 x 2.5 conductor																			
	Flexible cable with cable end	mm ²	1 x 1...2.5 conductor or 2 x 1...2.5 conductors																			
Tightening torque		N.m	0.8																			

Characteristics

TeSys protection components

Thermal-magnetic motor circuit-breakers
Electric trips

3

Characteristics of electric trips

Circuit-breaker type		GV2 ME, GV2 P GV3 P, GV3 L		GV2 ME only	GV3 ME80		GV7 R	
Type of trip		GVAU	GVAS	GVAX (1)	GV3 B	GV3 D	GV7 AU	GV7 AS
Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V	690	690	500	690	690	690
	Conforming to CSA C22-2 n° 14, UL 508	V	600	600	—	600 (B600)	600 (B600)	600
Operational voltage	Conforming to IEC 60947-1	V	0.85... 1.1 Un	0.7... 1.1 Un	0.85... 1.1 Un	0.8...1.1 Un	0.85... 1.1 Un	0.7... 1.1 Un
Drop-out voltage		V	0.7... 0.35 Un	0.75... 0.2 Un	0.7... 0.35 Un	0.7...0.35 Un	0.35... 0.7 Ue	0.2... 0.75 Ue
Inrush consumption	~	VA	12	14	12	12	< 10	
	—	W	8	10.5	8	7	< 5	
Sealed consumption	~	VA	3.5	5	3.5	7	< 5	
	—	W	1.1	1.6	1.1	2.5	< 5	
Operating time	Conforming to IEC 60947-1	ms	From the moment the voltage reaches its operational value until opening of the circuit-breaker. 10...15		10	15	< 50	
On-load factor			100 %		100 %	100 %		
Cabling	Number of conductors		2 or 4		1 or 2	1		
	Solid cable	mm²	1...2.5		1...2.5	1.5		
	Flexible cable without cable end	mm²	0.75...2.5		0.75...2.5	1.5		
	Flexible cable with cable end	mm²	0.75...1.5		0.75...2.5	1		
Tightening torque		N.m	1.4 max		1.2	1.2		
Mechanical durability	(C.O.: Close - Open)	C.O.	30 000 (GV2 ME and GV2 P) 10 000 (GV3 P and GV3 L)		50 % of the mechanical durability of the circuit-breaker			

(1) Wiring scheme of undervoltage trip for dangerous machines (conforming to INRS) on GV2 ME only, see page 3/76.

Characteristics

TeSys protection components

Thermal-magnetic and magnetic motor circuit-breakers GV2 and GV3
Accessories

3

Characteristics of 3-pole busbars GV2 G●●● and GV3 G●●●

Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V	GV2 G●●●	GV3 G●●●
Conventional thermal current (Ith)	Conforming to IEC 60439-1	A	63	115
Permissible peak current (I peak)		kA	11	20
Permissible thermal limit (I ² t)		kA ² s	104	300
Degree of protection	Conforming to IEC 60529		IP 20	IP 20
Terminal block			Yes	—

Characteristics of terminal blocks GV2 G05 and GV1 G09 (for GV2 ME and GV2 P)

Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V	690
Conventional thermal current (Ith)	Conforming to IEC 60439-1	A	63
Degree of protection	Conforming to IEC 60529		IP 20
Connection	Solid cable	mm ²	1 x 1.5 to 25 conductor or 2 x 1.5 to 6 conductors
	Flexible cable without cable end	mm ²	1 x 1.5 to 16 conductor or 2 x 2.5 to 4 conductors
	Flexible cable with cable end	mm ²	1 x 1.5 to 10 conductor or 2 x 1.5 to 2 conductors
	Flexible or solid cable AWG		1 AWG 4
Tightening torque	Connector	N.m	2.2
	Screw clamp terminals	N.m	1.7

Characteristics of current limiters (GV2 ME and GV2 P)


Type	GV1 L3	LA9 LB920
Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V
Conventional thermal current (Ith)	Conforming to IEC 60947-1	A
Operating threshold	rms current	A
Connection		
	1 conductor	2 conductors
	Solid cable	mm ²
	1.5...25	1.5...10
	Flexible cable without cable end	mm ²
	1.5...25	2.5...10
	Flexible cable with cable end	mm ²
	1.5...16	1.5...4
Tightening torque		N.m
	2.2	

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV2 ME and GV2 P

Thermal-magnetic tripping curves for GV2 ME and GV2 P

Average operating times at 20 °C related to multiples of the setting current

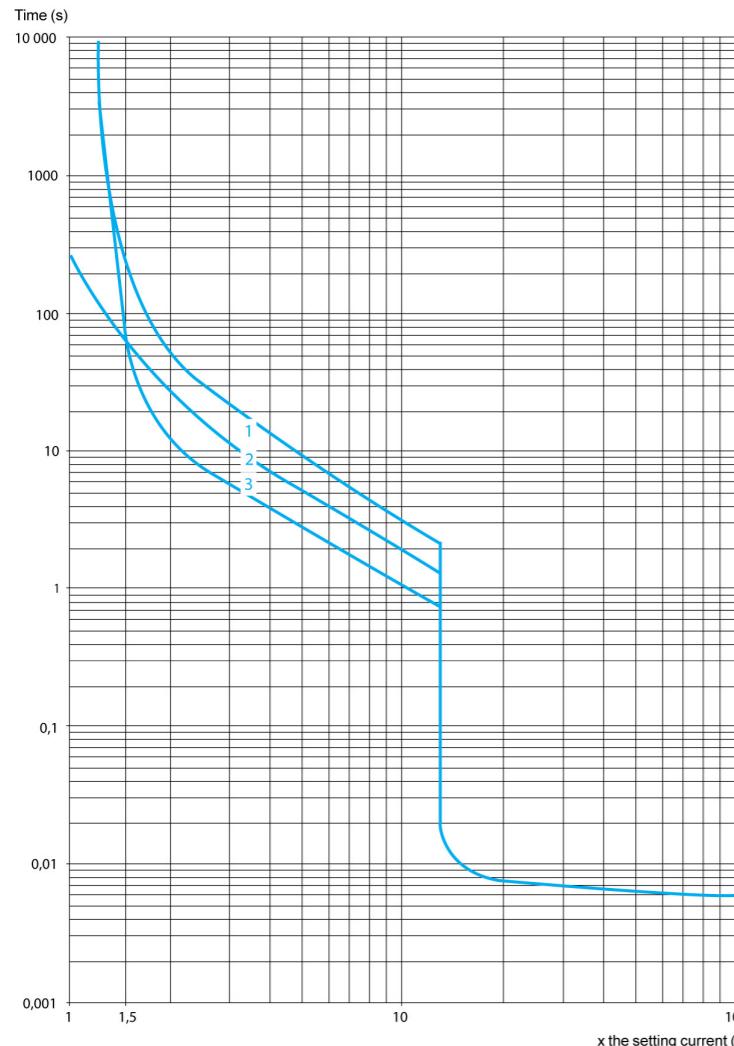

1 3 poles from cold state

2 2 poles from cold state

3 3 poles from hot state

TeSys protection components


Thermal-magnetic motor circuit-breakers
GV2 ME and GV2 P

Current limitation on short-circuit for GV2 ME and GV2 P (3-phase 400/415 V)

Dynamic stress

I peak = f (prospective Isc) at 1.05 Ue = 435 V

Limited peak current (kA)

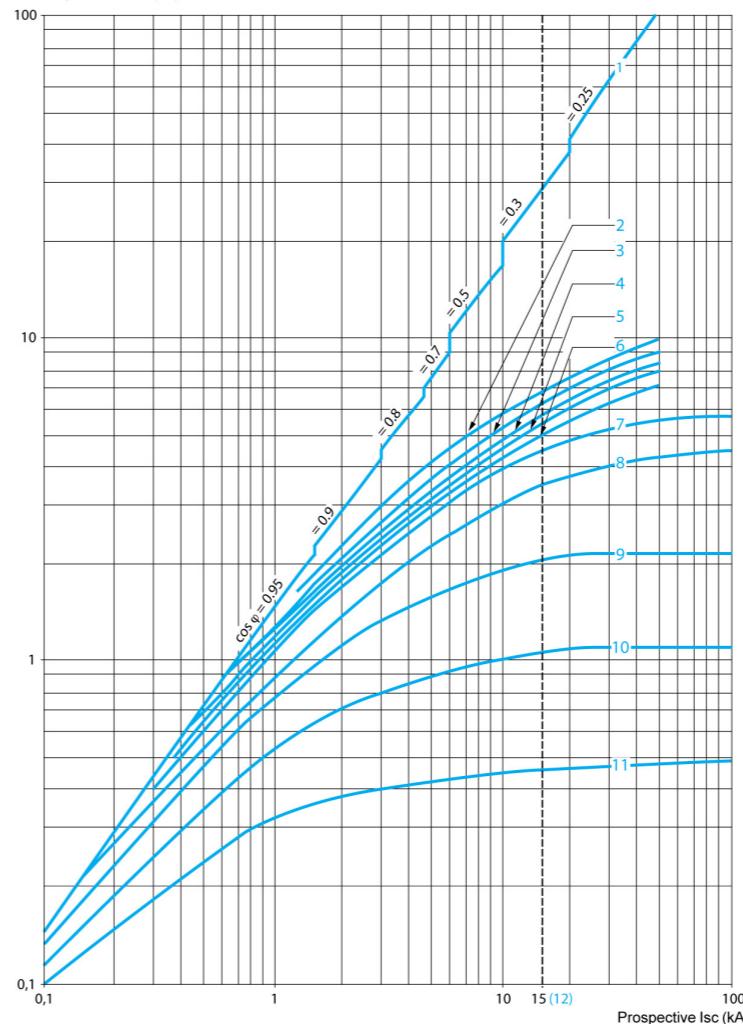

1 Maximum peak current

2 24-32 A

3 20-25 A

4 17-23 A

5 13-18 A

6 9-14 A

7 6-10 A

8 4-6.3 A

9 2.5-4 A

10 1.6-2.5 A


11 1-1.6 A

12 Limit of rated ultimate breaking capacity on short-circuit of GV2 ME (14, 18, 23 and 25 A ratings)

Thermal limit on short-circuit for GV2 ME

Thermal limit in kA²s in the magnetic operating zone

Sum of $I^2dt = f$ (prospective Isc) at 1.05 Ue = 435 V

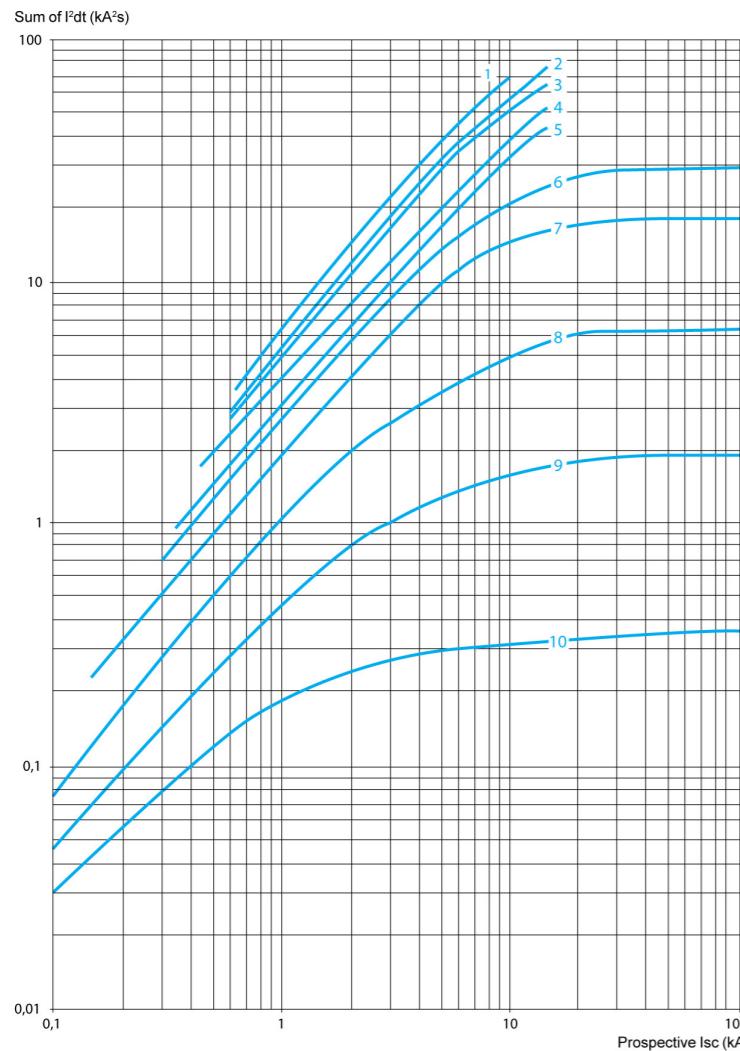


- 1** 24-32 A
- 2** 20-25 A
- 3** 17-23 A
- 4** 13-18 A
- 5** 9-14 A
- 6** 6-10 A
- 7** 4-6.3 A
- 8** 2.5-4 A
- 9** 1.6-2.5 A
- 10** 1-1.6 A

Thermal limit on short-circuit for GV2 P

Thermal limit in kA²s in the magnetic operating zone

Sum of $I^2dt = f$ (prospective Isc) at 1.05 Ue = 435 V

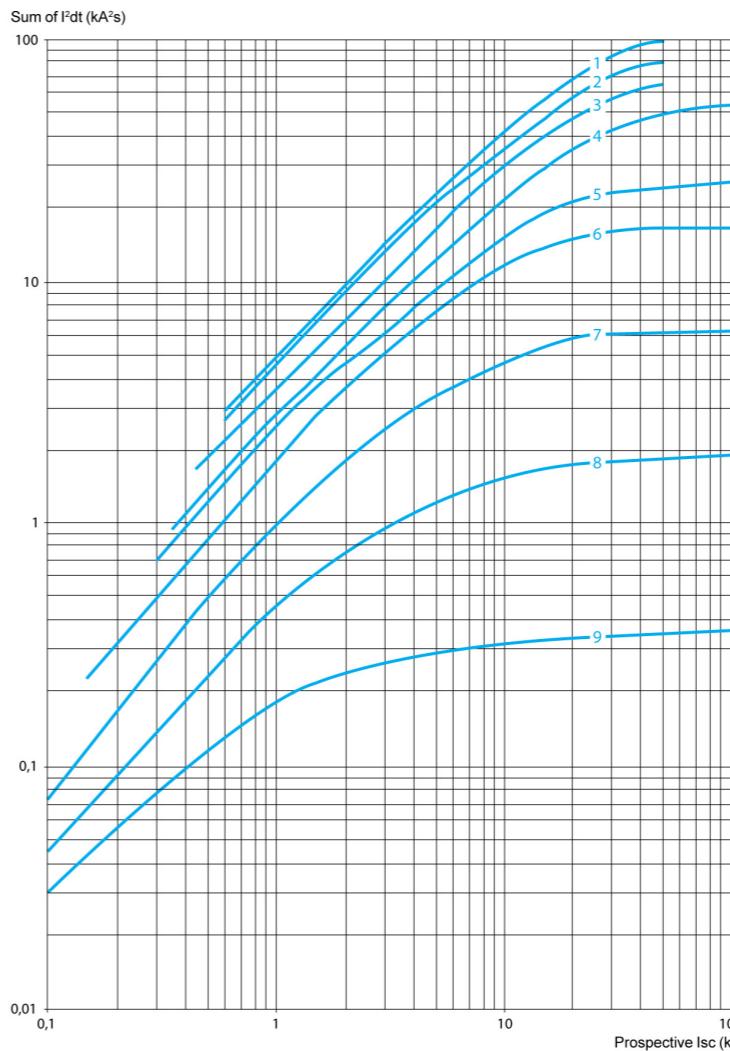


- 1** 24-32 A
- 1** 20-25 A
- 2** 17-23 A
- 3** 13-18 A
- 4** 9-14 A
- 5** 6-10 A
- 6** 4-6.3 A
- 7** 2.5-4 A
- 8** 1.6-2.5 A
- 9** 1-1.6 A

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV3 P and GV3 ME80

Thermal-magnetic tripping curves

Average operating times at 20 °C related to multiples of the setting current

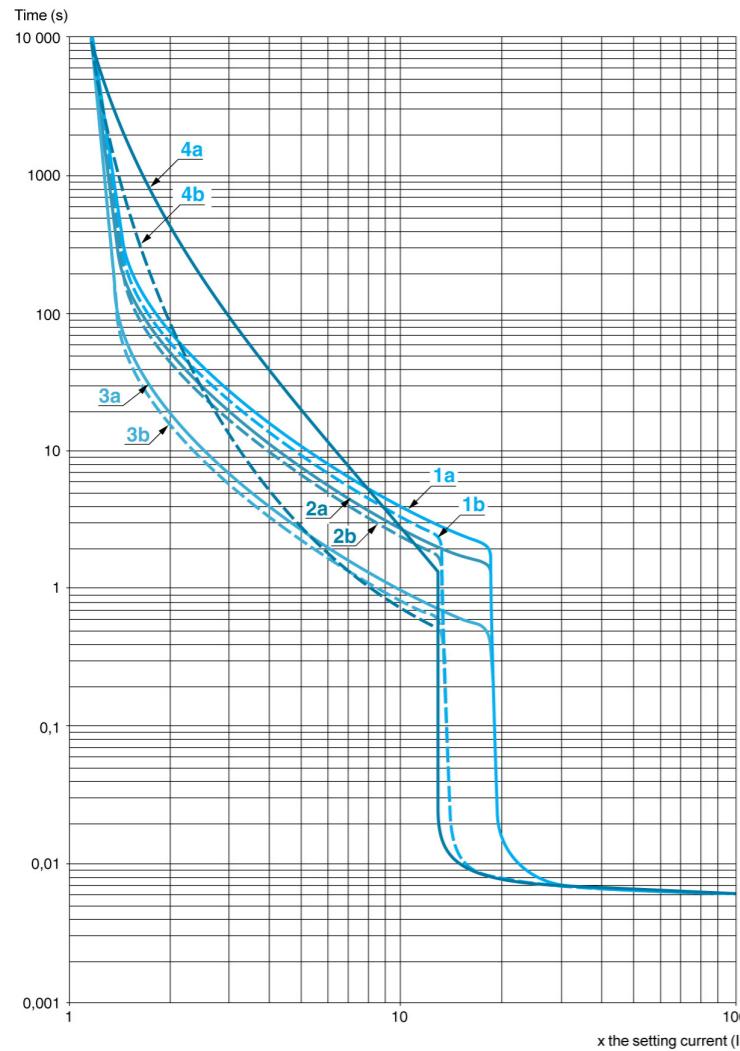

1a 3 poles from cold state (Ir mini.) : GV3 P

1b 3 poles from cold state (Ir maxi.) : GV3 P

2a 2 poles from cold state (Ir mini.) : GV3 P

2b 2 poles from cold state (Ir maxi.) : GV3 P

3a 3 poles from hot state (Ir mini.) : GV3 P

3b 3 poles from hot state (Ir maxi.) : GV3 P

4a 3 poles from hot state (Ir mini.) : GV3 ME80

4b 3 poles from hot state (Ir maxi.) : GV3 ME80

TeSys protection components


Thermal-magnetic motor circuit-breakers
GV3 P and GV3 ME80

Current limitation on short-circuit (3-phase 400/415 V)

Dynamic stress

I peak = f (prospective Isc) at 1.05 Ue = 435 V

Limited peak current (kA)

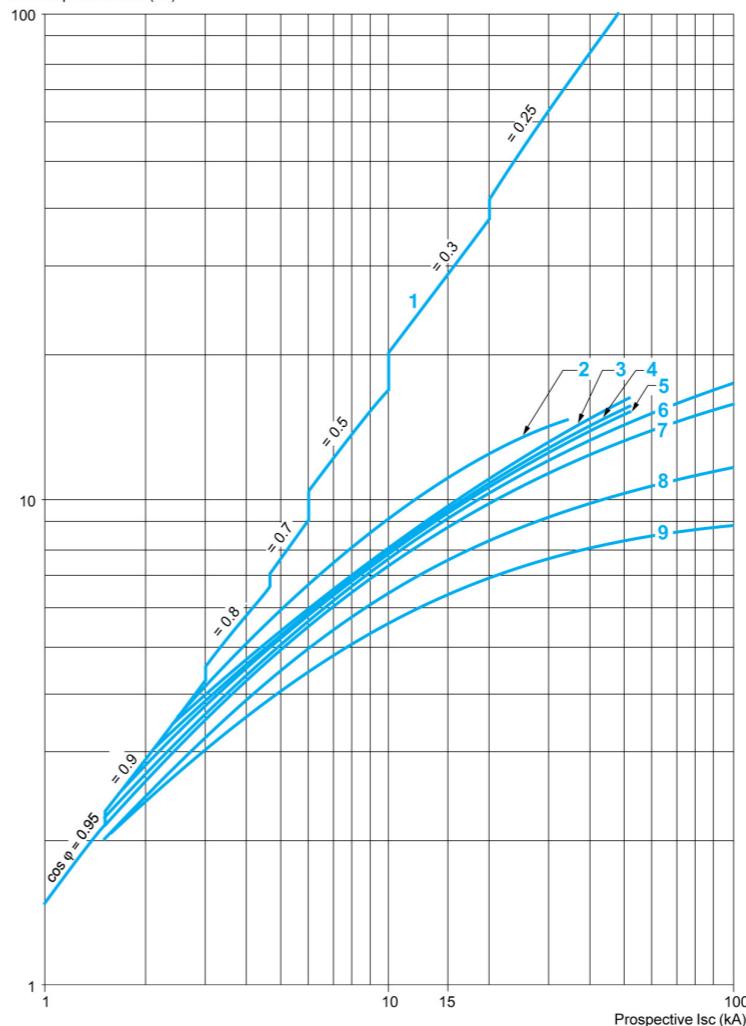

1 Maximum peak current

2 56 -80 A

3 48 -65 A

4 37 -50 A

5 30 -40 A

6 23 -32 A

7 17 -25 A

8 12 -18 A

9 9 -13 A

Curves (continued)


TeSys protection components

Thermal-magnetic motor circuit-breakers
GV3 P and GV3 ME80

3

Maximum thermal limit on short-circuit

Thermal limit in kA^2s in the magnetic operating zone

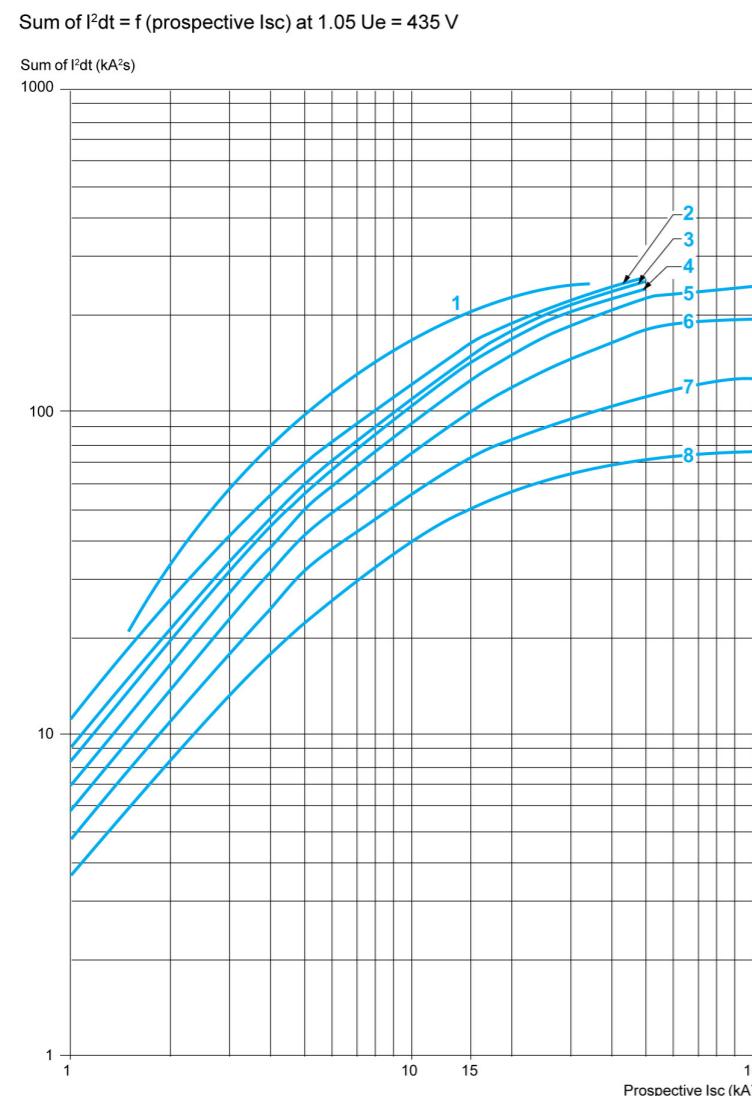

- 1 56-80 A (GV3 ME80)
- 2 48-65 A (GV3 P65)
- 3 37-50 A (GV3 P50)
- 4 30-40 A (GV3 P40)
- 5 23-32 A (GV3 P32)
- 6 17-25 A (GV3 P25)
- 7 12-18 A (GV3 P18)
- 8 9-13 A (GV3 P13)

Curves


TeSys protection components

Thermal-magnetic motor circuit-breakers
GV7 R

3

Thermal-magnetic tripping curves for GV7 R

Average operating times at 20°C related to multiples of the setting current

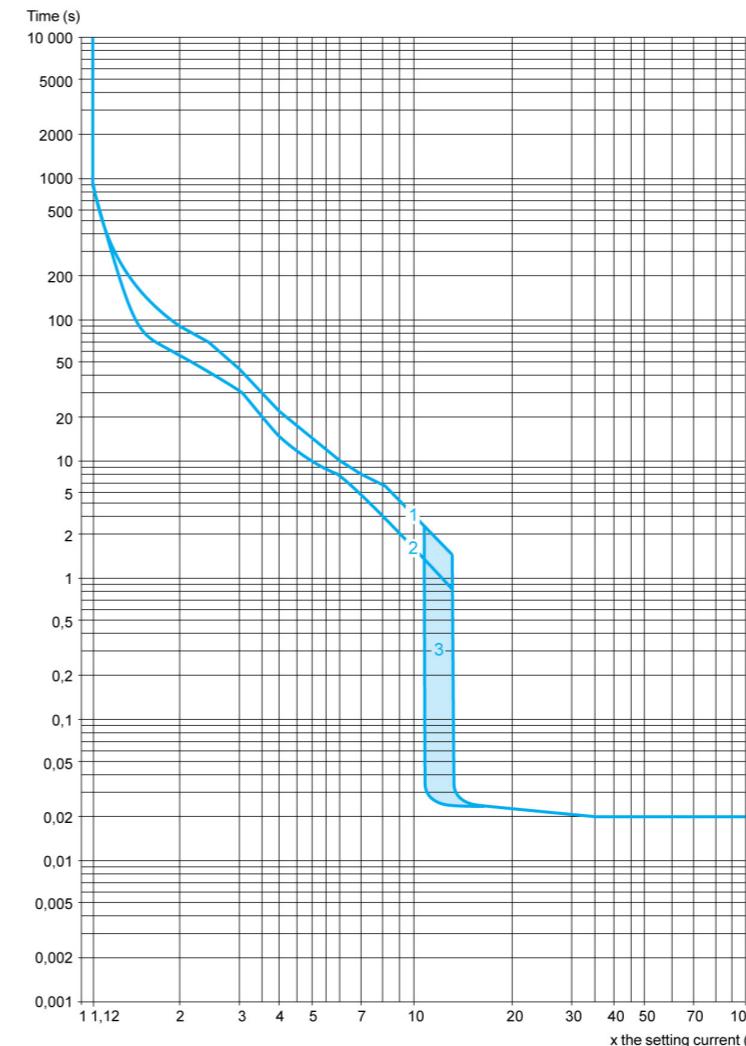

1 Cold state curve

2 Cold state curve

3 12...14 lr

In the event of total phase failure, tripping occurs after $4 \text{ s} \pm 20\%$

Curves (continued)

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV7 R


Current limitation on short-circuit (3-phase 400/415 V)

Dynamic stress

$I_{peak} = f(I_{prospective\ Isc})$

For GV7 RE only

Limited peak current (kA)

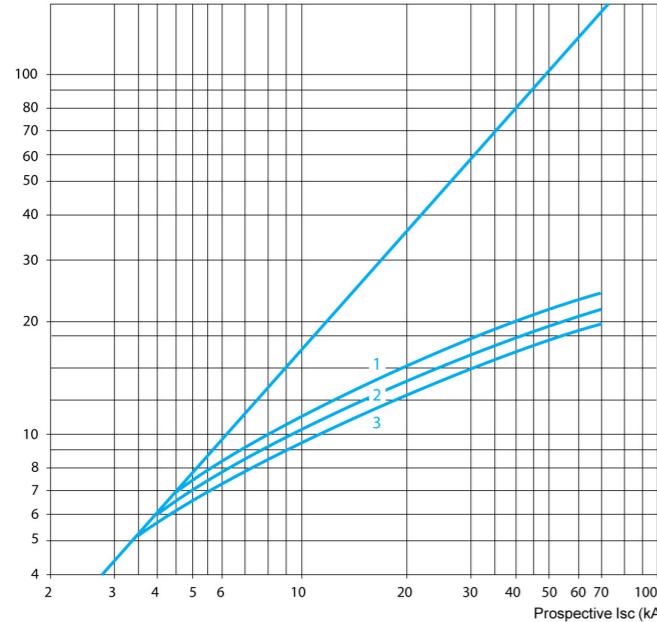

- 1 GV7 RE220
- 2 GV7 RE150
- 3 GV7 RE100

3

Curves (continued)

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV7 R


Thermal limit (3-phase 400/415 V)

Thermal limit

Sum of $I^2dt = f(I_{prospective\ Isc})$

For GV7 RE only

Sum of I^2dt (A²s)

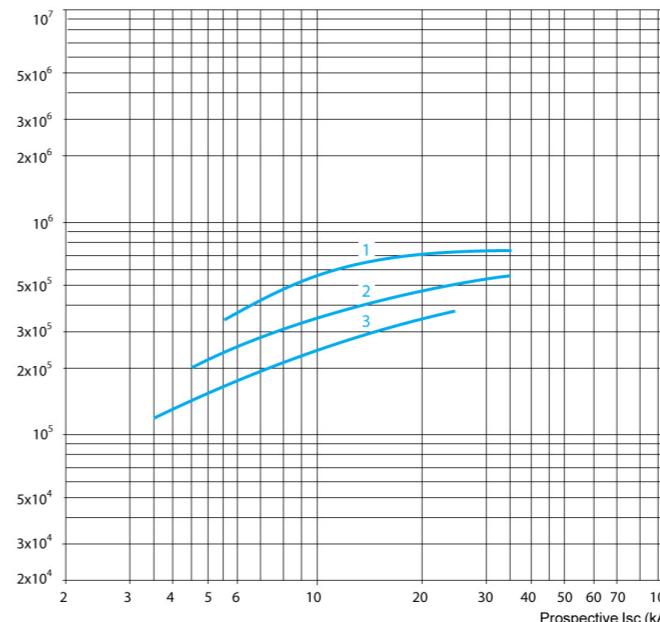


- 1 GV7 RE220
- 2 GV7 RE150
- 3 GV7 RE100

3

For GV7 RS only

Limited peak current (kA)

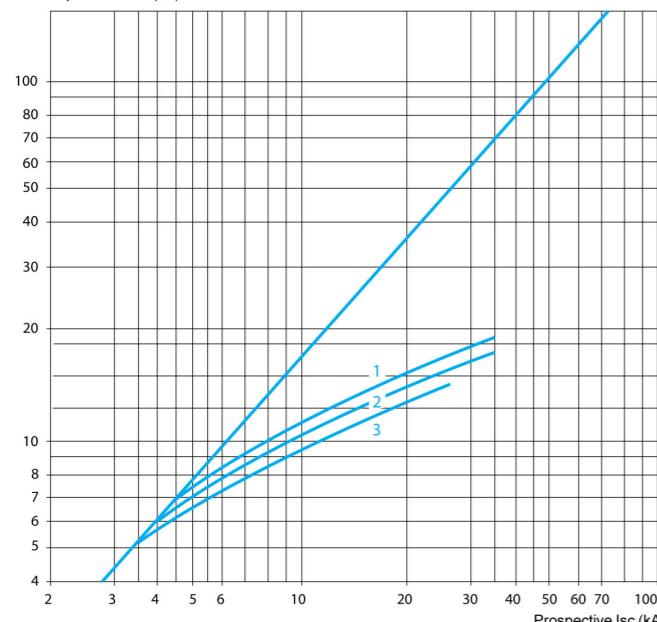

- 1 GV7 RS220
- 2 GV7 RS150
- 3 GV7 RS100

Curves (continued)

TeSys protection components


Thermal-magnetic motor circuit-breakers
GV7 R

Current limitation on short-circuit (3-phase 690 V)

Dynamic stress


$I_{peak} = f(I_{prospective\ Isc})$

For GV7 RE only

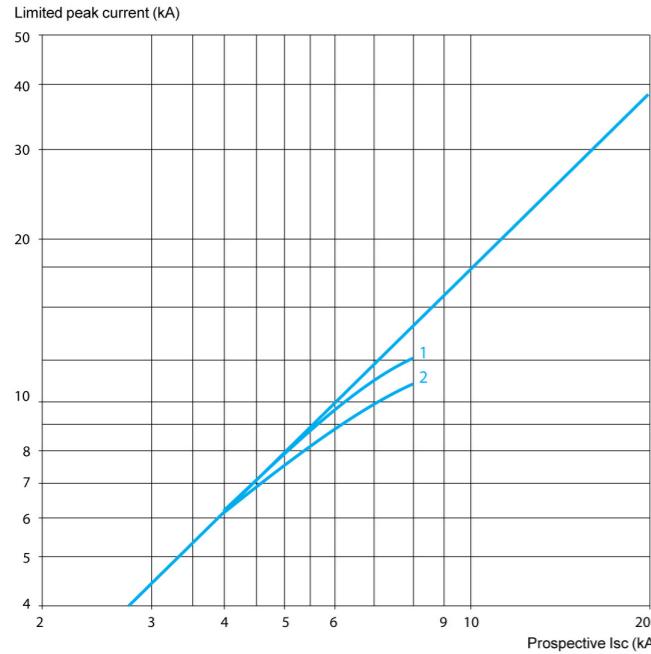

3

For GV7 RS only

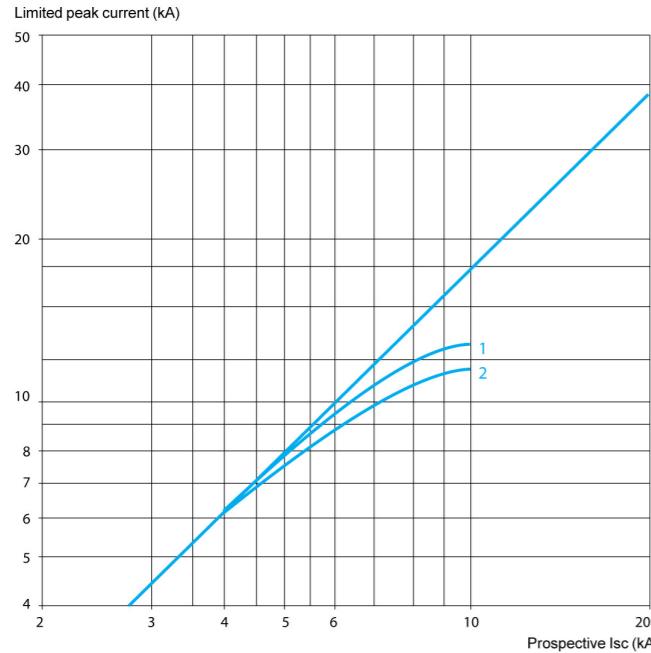

3

Curves (continued)

TeSys protection components


Thermal-magnetic motor circuit-breakers
GV7 R

Thermal limit on short-circuit (3-phase 690 V)

Thermal limit


$\text{Sum of } I^2dt = f(I_{prospective\ Isc})$

For GV7 RE only

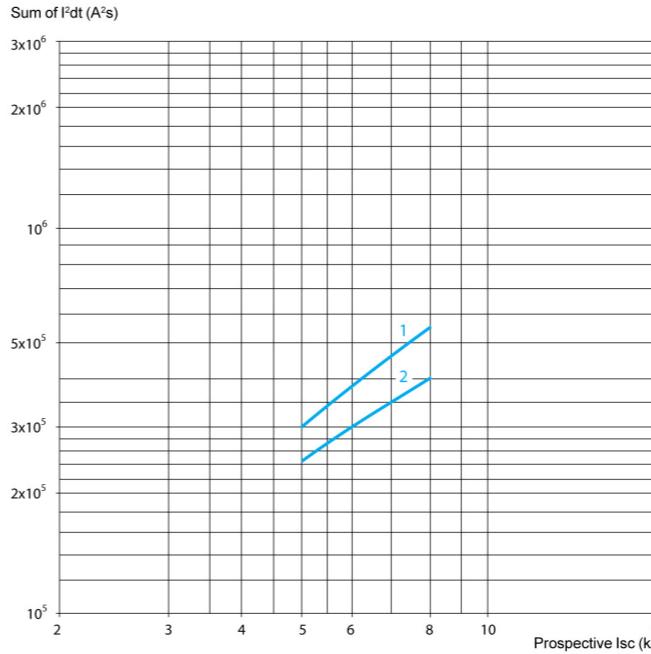

3

For GV7 RS only

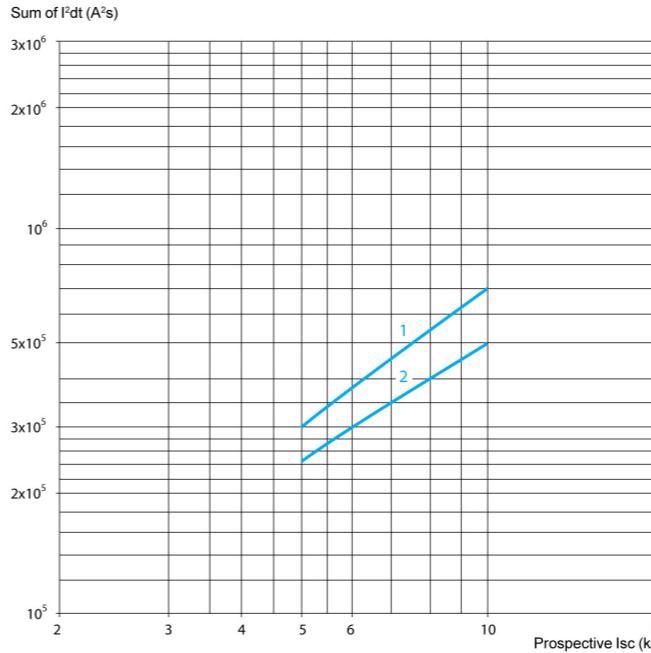


3

Curves

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV2 RT

Thermal-magnetic tripping curves for GV2 RT

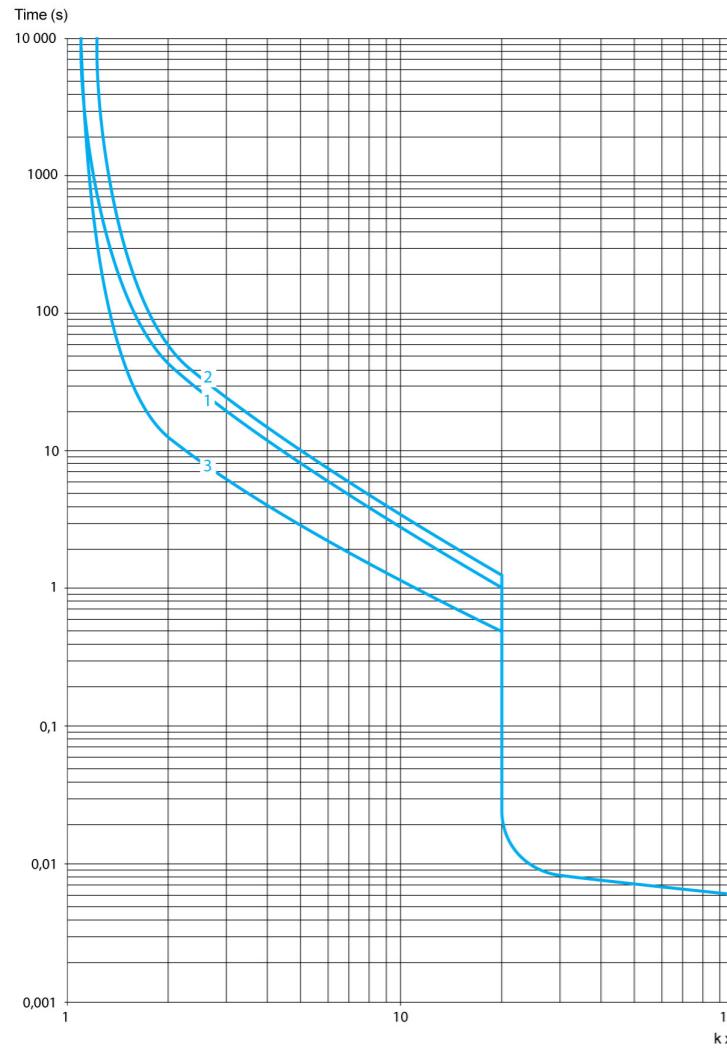


3

Curves

TeSys protection components

Magnetic motor circuit-breakers
GV2 L and GV2 LE

Tripping curves for GV2 L or LE combined with thermal overload relay LRD or LR2 K

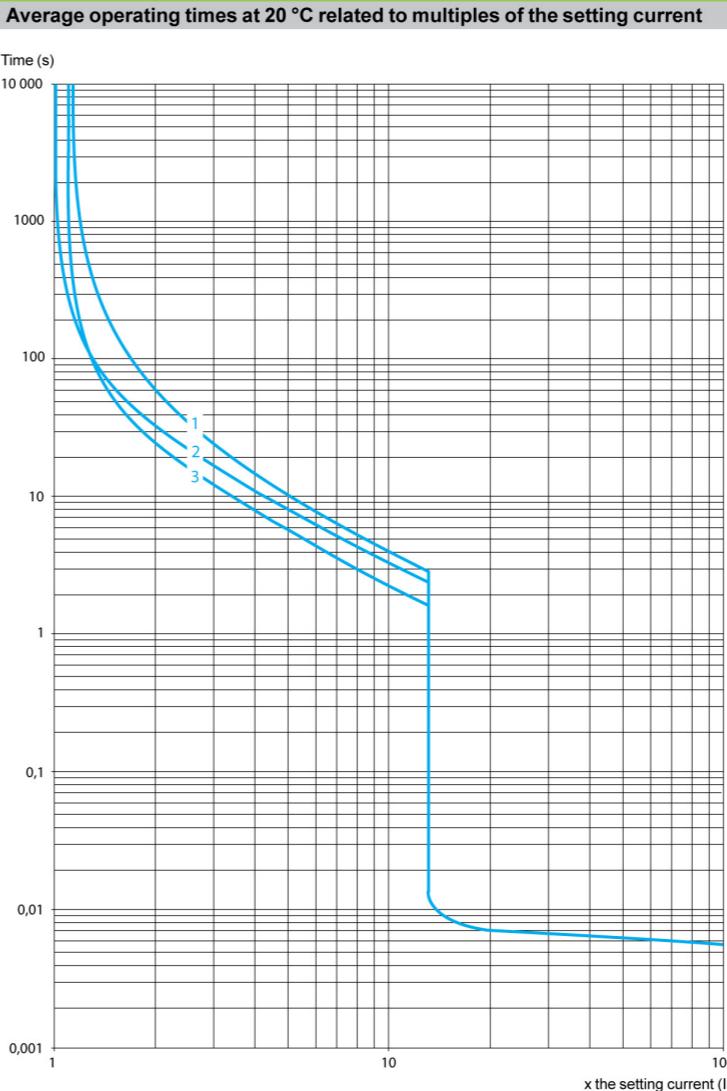

3

- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state

- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state

Curves (continued)

TeSys protection components

Magnetic motor circuit-breakers
GV2 L and GV2 LE

Curves (continued)

TeSys protection components


Magnetic motor circuit-breakers
GV2 L and GV2 LE

Current limitation on short-circuit for GV2 L and GV2 LE only (3-phase 400/415 V)

Dynamic stress

I peak = f (prospective Isc) at 1.05 Ue = 435 V

Limited peak current (kA)

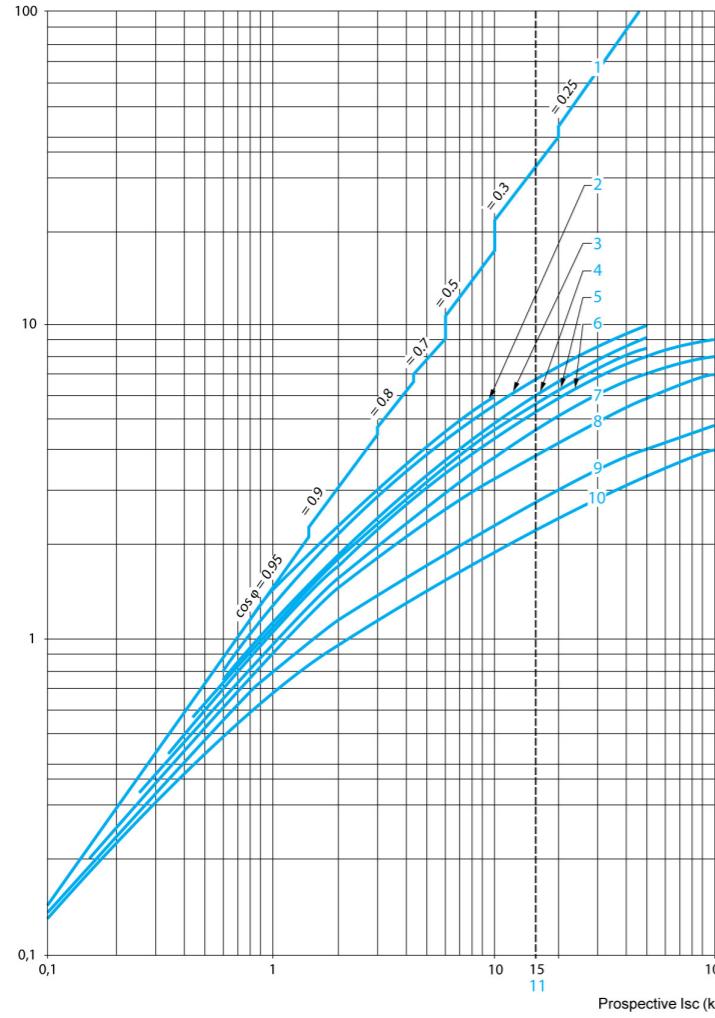


3

Current limitation on short-circuit for GV2 L and GV2 LE + thermal overload relay LRD or LR2 K (3-phase 400/415 V)

Dynamic stress

I peak = f (prospective Isc) at 1.05 Ue = 435 V

Limited peak current (kA)

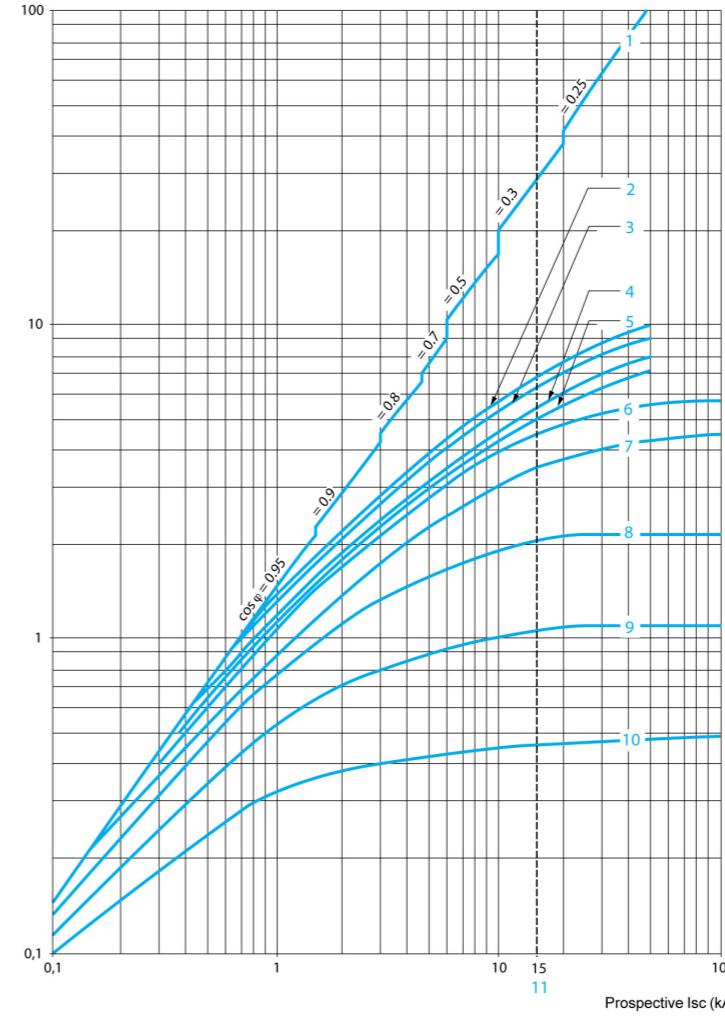

3

1 Maximum peak current

2 32 A

3 25 A

4 18 A

5 16 A

6 14 A

7 10 A

8 6.3 A

9 4 A

10 2.5 A

11 1.6 A

11 Limit of rated ultimate breaking capacity on short-circuit of GV2 LE (14, 18, 23 and 25 A ratings).

1 Maximum peak current

2 32 A

3 25 A

4 18 A

5 16 A

6 14 A

7 10 A

8 6.3 A

9 4 A

10 2.5 A


11 1.6 A

11 Limit of rated ultimate breaking capacity on short-circuit of GV2 LE (14, 18, 23 and 25 A ratings).

Thermal limit on short-circuit for GV2 LE only

Thermal limit in kA²s in the magnetic operating zone

Sum of I²dt = f (prospective Isc) at 1.05 Ue = 435 V

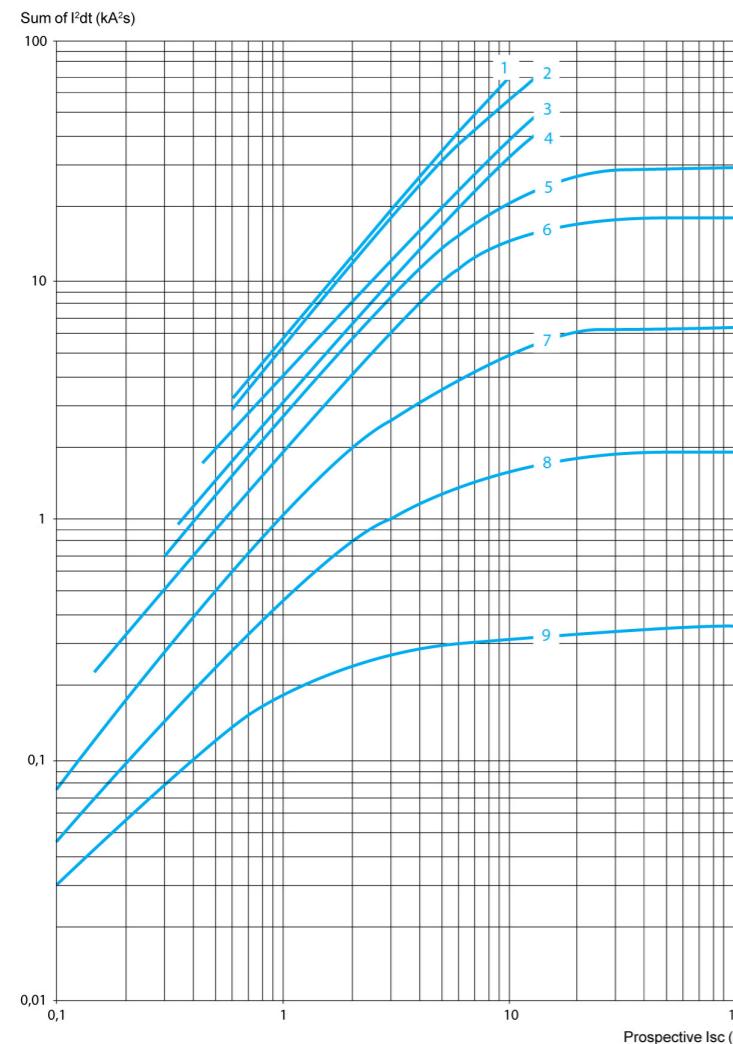


- 1** 32 A
- 2** 25 A
- 3** 18 A
- 4** 14 A
- 5** 10 A
- 6** 6.3 A
- 7** 4 A
- 8** 2.5 A
- 9** 1.6 A

3

Thermal limit on short-circuit for GV2 L only

Thermal limit in kA²s in the magnetic operating zone

Sum of I²dt = f (prospective Isc) at 1.05 Ue = 435 V

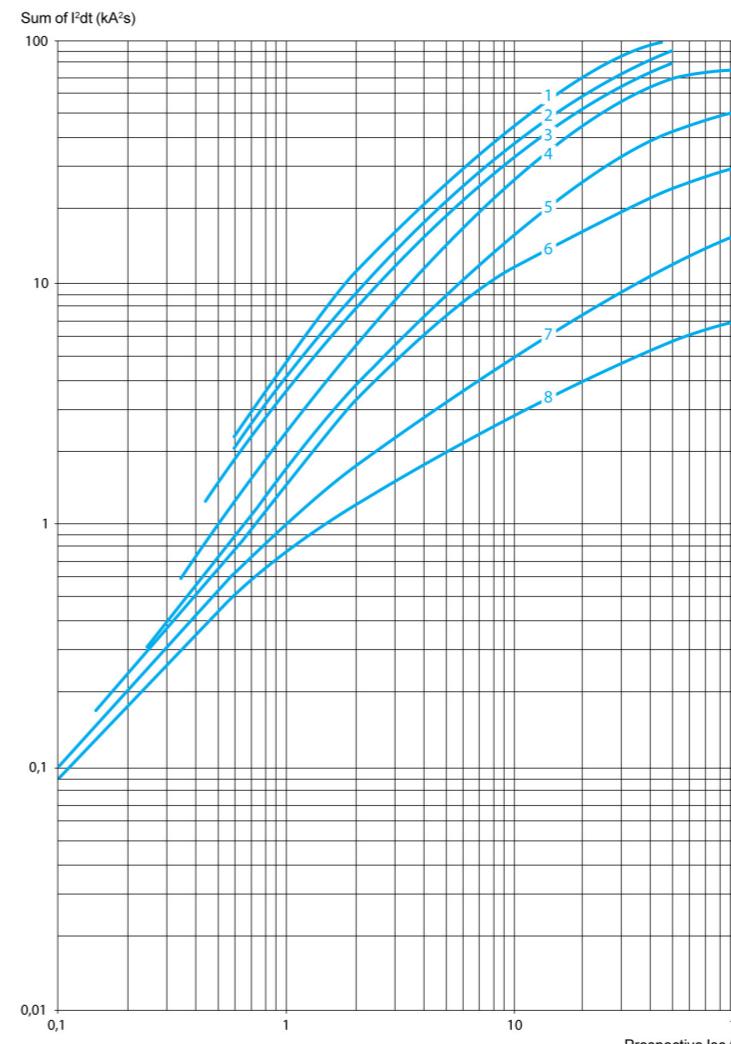

- 1** 25 A and 32 A
- 2** 18 A
- 3** 14 A
- 4** 10 A
- 5** 6.3 A
- 6** 4 A
- 7** 2.5 A
- 8** 1.6 A

3

Curves (continued)

TeSys protection components

Magnetic motor circuit-breakers
GV2 L and GV2 LE

Curves


TeSys protection components

Magnetic motor circuit-breakers
GV3 L and GK3 EF80

Thermal limit on short-circuit for GV2 L and GV2 LE + thermal overload relay LRD or LR2 K

Thermal limit in kA^2s in the magnetic operating zone

Sum of $I^2dt = f$ (prospective I_{sc}) at 1.05 $U_e = 435 \text{ V}$

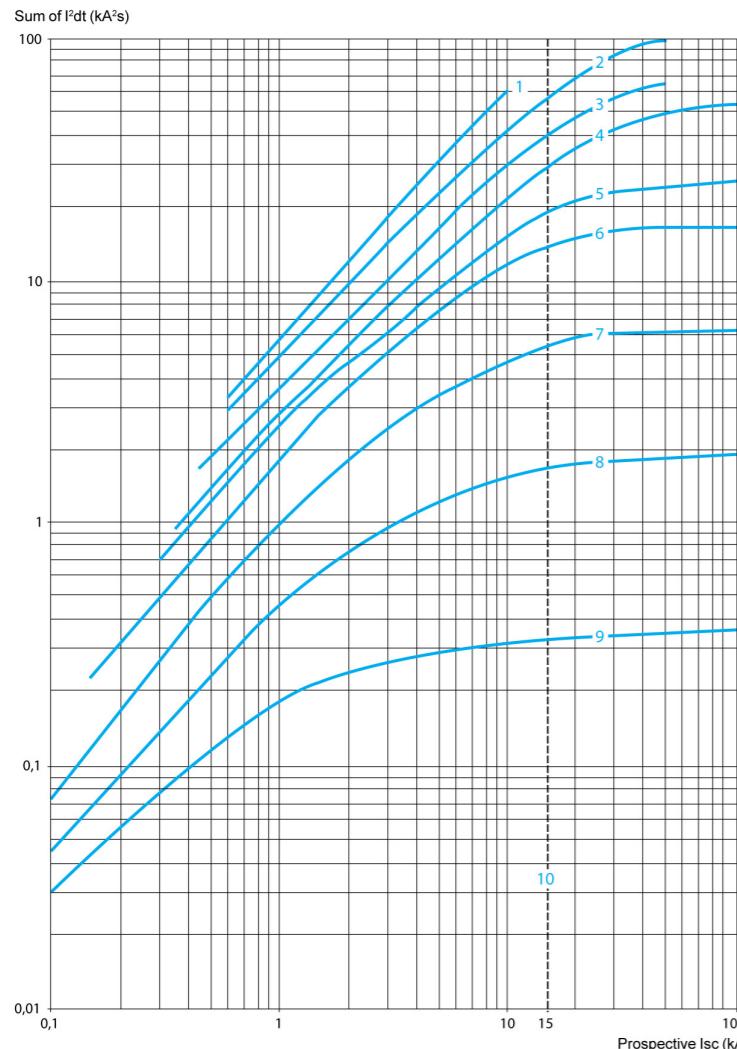

1 32 A (GV2 LE32)
2 25 A and 32 A (GV2 L32)

3 18 A

4 14 A

5 10 A

6 6.3 A

7 4 A


8 2.5 A

9 1.6 A

10 Limit of rated ultimate breaking capacity on short-circuit of GV2 LE (14, 18, 23 and 25 A ratings).

Tripping curves for GV3 L and GK3 EF80 combined with thermal overload relay LRD 33

Average operating time at 20 °C without prior current flow

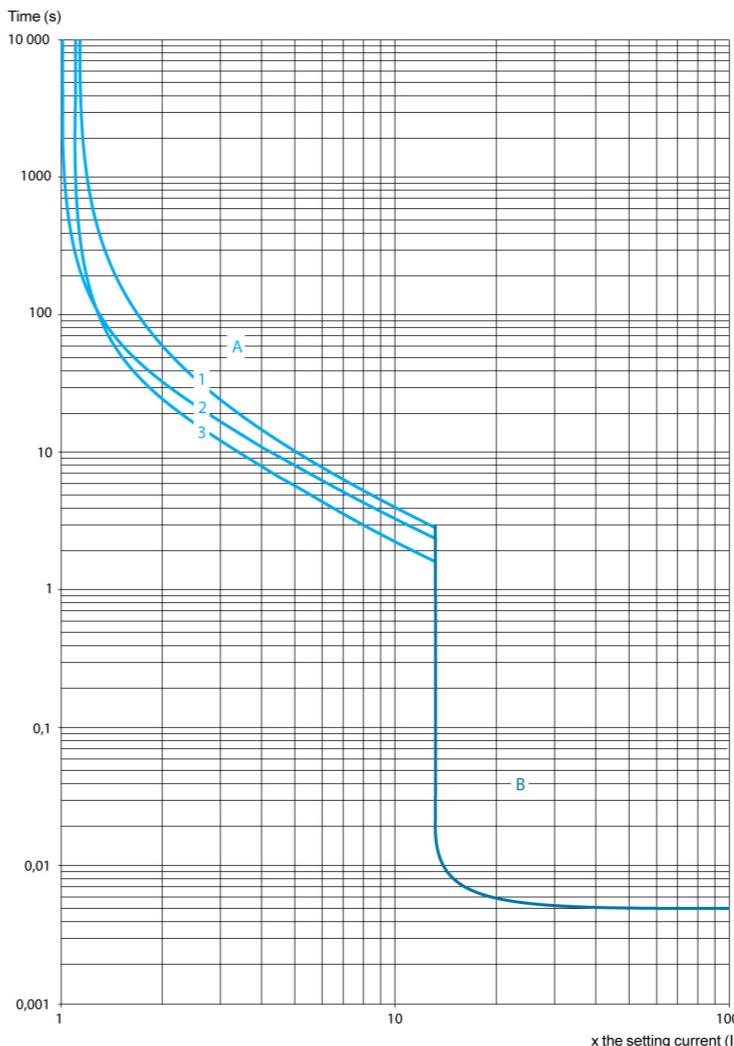

1 3 poles from cold state

2 2 poles from cold state

3 3 poles from hot state

A Thermal overload relay protection zone

B GK3 EF80 and GV3 L protection zone

Curves (continued)

TeSys protection components

Magnetic motor circuit-breakers
GV3 L and GK3 EF80

Curves (continued)

TeSys protection components


Magnetic motor circuit-breakers
GV3 L and GK3 EF80

Current limitation on short-circuit for GV3 L and GK3 EF80 (3-phase 400/415 V)

Dynamic stress

$I_{peak} = f(\text{prospective } I_{sc}) \text{ at } 1.05 U_e = 435 \text{ V}$

Limited peak current (kA)

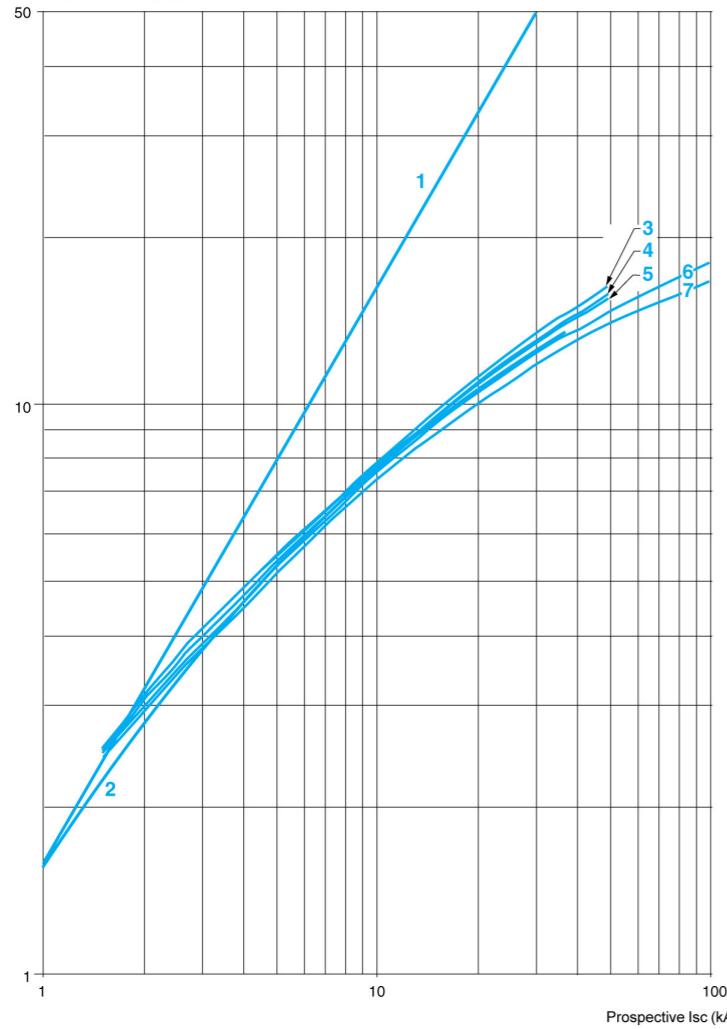


3

Thermal limit on short-circuit for GV3 L and GK3 EF80

Thermal limit in A²s

$\text{Sum of } I^2 dt = f(\text{prospective } I_{sc}) \text{ at } 1.05 U_e = 435 \text{ V}$

Sum of $I^2 dt$ (A²s)

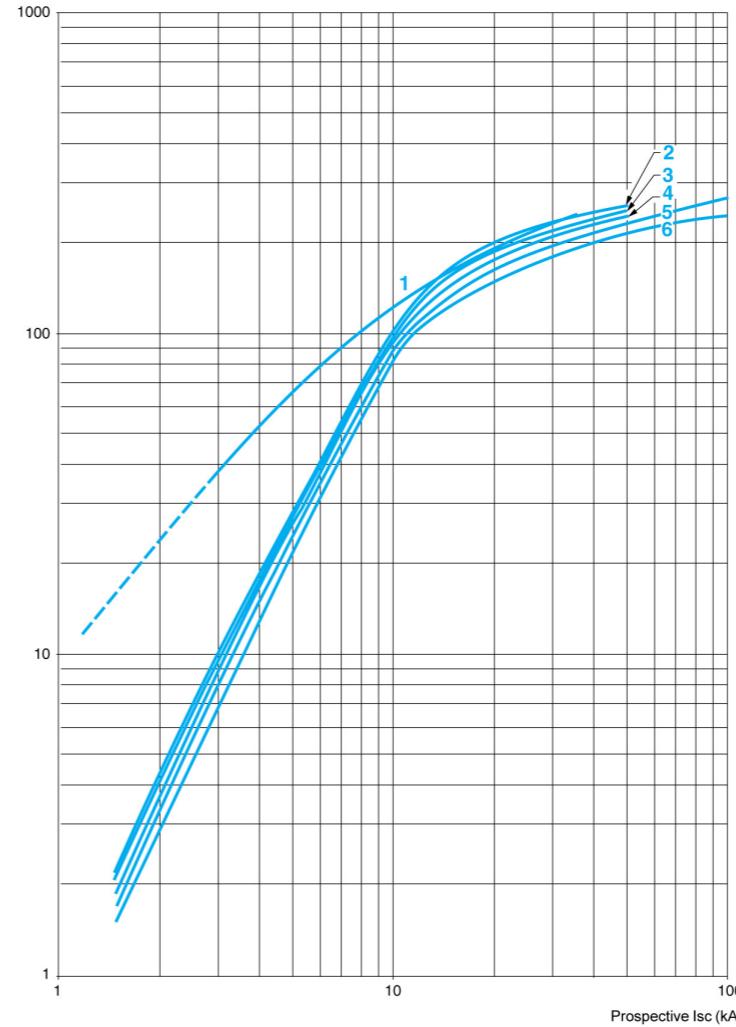

3

- 1 Maximum peak current
- 2 GK3 EF80
- 3 GV3 L65
- 4 GV3 L50
- 5 GV3 L40
- 6 GV3 L32
- 7 GV3 L25

- 1 GK3 EF80
- 2 GV3 L65
- 3 GV3 L50
- 4 GV3 L40
- 5 GV3 L32
- 6 GV3 L25

References

TeSys protection components

Thermal-magnetic motor circuit-breakers GV2 ME



GV2 ME10

3

Motor circuit-breakers from 0.06 to 15 kW / 400 V, with screw clamp terminals

GV2 ME with pushbutton control

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3						Setting range of thermal trips	Magnetic tripping current Id ± 20 %	Reference	Weight
400/415 V			500 V			690 V			
P	Icu	Ics (1)	P	Icu	Ics (1)	P	Icu	Ics (1)	
kW	kA	%	kW	kA	%	kW	kA	%	A
—	—	—	—	—	—	—	—	—	0.1...0.16
—	—	—	—	—	—	—	—	—	1.5
—	—	—	—	—	—	—	—	—	GV2 ME01
—	—	—	—	—	—	—	—	—	0.260
0.06	★	★	—	—	—	—	—	—	0.16...0.25
—	—	—	—	—	—	—	—	—	2.4
—	—	—	—	—	—	—	—	—	GV2 ME02
—	—	—	—	—	—	—	—	—	0.260
0.09	★	★	—	—	—	—	—	—	0.25...0.40
—	—	—	—	—	—	—	—	—	5
—	—	—	—	—	—	—	—	—	GV2 ME03
—	—	—	—	—	—	—	—	—	0.260
0.12	★	★	—	—	—	0.37	★	★	0.40...0.63
0.18	★	★	—	—	—	—	—	—	8
—	—	—	—	—	—	—	—	—	GV2 ME04
—	—	—	—	—	—	—	—	—	0.260
0.25	★	★	—	—	—	0.55	★	★	0.63...1
—	—	—	—	—	—	—	—	—	13
—	—	—	—	—	—	—	—	—	GV2 ME05
—	—	—	—	—	—	—	—	—	0.260
0.37	★	★	0.37	★	★	—	—	—	1...16
0.55	★	★	0.55	★	★	0.75	★	★	22.5
—	—	—	—	—	—	—	—	—	GV2 ME06
—	—	—	—	—	—	—	—	—	0.260
0.75	★	★	1.1	★	★	1.5	3	75	1.6...2.5
—	—	—	—	—	—	—	—	—	33.5
—	—	—	—	—	—	—	—	—	GV2 ME07
—	—	—	—	—	—	—	—	—	0.260
1.1	★	★	1.5	★	★	2.2	3	75	2.5...4
1.5	★	★	2.2	★	★	3	3	75	51
—	—	—	—	—	—	—	—	—	GV2 ME08
—	—	—	—	—	—	—	—	—	0.260
2.2	★	★	3	50	100	4	3	75	4...6.3
—	—	—	—	—	—	—	—	—	78
—	—	—	—	—	—	—	—	—	GV2 ME10
—	—	—	—	—	—	—	—	—	0.260
3	★	★	4	10	100	5.5	3	75	6...10
4	★	★	5.5	10	100	7.5	3	75	138
—	—	—	—	—	—	—	—	—	GV2 ME14
—	—	—	—	—	—	—	—	—	0.260
5.5	15	50	7.5	6	75	9	3	75	9...14
—	—	—	—	—	—	11	3	75	170
—	—	—	—	—	—	—	—	—	GV2 ME16
—	—	—	—	—	—	—	—	—	0.260
7.5	15	50	9	6	75	15	3	75	13...18
—	—	—	—	—	—	—	—	—	223
—	—	—	—	—	—	—	—	—	GV2 ME20
—	—	—	—	—	—	—	—	—	0.260
9	15	40	11	4	75	18.5	3	75	17...23
—	—	—	—	—	—	—	—	—	327
—	—	—	—	—	—	—	—	—	GV2 ME21
—	—	—	—	—	—	—	—	—	0.260
11	15	40	15	4	75	—	—	—	20...25
—	—	—	—	—	—	—	—	—	327
—	—	—	—	—	—	—	—	—	GV2 ME22 (3)
—	—	—	—	—	—	—	—	—	0.260
15	10	50	18.5	4	75	22	3	75	24...32
—	—	—	—	—	—	—	—	—	416
—	—	—	—	—	—	—	—	—	GV2 ME32
—	—	—	—	—	—	—	—	—	0.260

Motor circuit-breakers from 0.06 to 15 kW / 400 V, with lugs

To order thermal magnetic circuit-breakers with connection by lugs, add the digit **6** to the end of reference selected above.

Example: **GV2 ME08** becomes **GV2 ME086**.

Thermal magnetic circuit-breakers GV2 ME with built-in auxiliary contact block

With instantaneous auxiliary contact block (composition, see page 3/55):

■ GV AE1, add suffix **AE1TQ** to the motor circuit-breaker reference selected above.

Example: **GV2 ME01AE1TQ**.

■ GV AE11, add suffix **AE11TQ** to the motor circuit-breaker reference selected above.

Example: **GV2 ME01AE11TQ**.

■ GV AN11, add suffix **AN11TQ** to the motor circuit-breaker reference selected above.

Example: **GV2 ME01AN11TQ**.

These circuit-breakers with built-in contact block are sold in lots of 20 units in a single pack.

(1) As % of Icu.

(2) The thermal trip setting must be within the range marked on the graduated knob.

(3) Maximum rating which can be mounted in enclosures **GV2 MC** or **MP**, please consult your Regional Sales Office.

* > 100 kA.

References (continued)

TeSys protection components

Thermal-magnetic motor circuit-breakers GV2 ME



GV2 ME●●3

3

Motor circuit-breakers from 0.06 to 11 kW, with spring terminal connections

GV2 ME (1) with pushbutton control

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3						Setting range of thermal trips	Magnetic tripping current Id ± 20 %	Reference	Weight
400/415 V			500 V						
P	Icu	Ics (2)	P	Icu	Ics (2)	(3)			
kW	kA	%	kW	kA	%	A	A	A	A
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	0.1...0.16
—	—	—	—	—	—	—	—	—	1.5
—	—	—	—	—	—	—	—	—	GV2 ME013
—	—	—	—	—	—	—	—	—	0.280
0.06	★	★	—	—	—	—	—	—	GV2 ME023
—	—	—	—	—	—	—	—	—	0.280
0.09	★	★	—	—	—	—	—	—	GV2 ME033

References

TeSys protection components

Thermal-magnetic circuit-breakers GV2 RT



GV2 RT

3

For motors with high current peak on starting								
Control by rocker lever								
Standard power ratings of 3-phase motors 50/60 Hz in category AC-3				Setting range of thermal trips (1)	Magnetic tripping current Id ± 20 %	Reference	Weight	
220/ 230 V	400/ 415 V	440 V	500 V	690 V	A	A	kg	
kW	kW	kW	kW	A	A	A	kg	
0.06	0.09	0.09	—	0.25...0.40	8	GV2 RT03	0.350	
		0.12	—					
	0.12	0.12	0.18	0.40...0.63	13	GV2 RT04	0.350	
	0.12	0.12	0.18					
0.09	0.25	0.25	0.37	0.55	0.63...1	22	GV2 RT05	0.350
0.12	0.37	0.37	0.55	0.55	1...	1.6	GV2 RT06	0.350
0.18	0.37	0.37	0.55	0.75	1...	1.6	GV2 RT07	0.350
0.25	0.55	0.55	0.75	1.1				
0.37	0.75	0.75	1.1	1.5	1.6...2.5	51	GV2 RT08	0.350
0.55	1.1	1.5	1.5	2.2	2.5...4	78	GV2 RT10	0.350
0.75	1.5	2.2	2.2	3				
1.1	2.2	2.2	3	4	4...6.3	138	GV2 RT14	0.350
1.5	3	4	4	5.5	6...10	200	GV2 RT16	0.350
2.2	4	4	5.5	7.5				
2.2	5.5	5.5	7.5	9	9...14	280	GV2 RT20	0.350
3	7.5	7.5	7.5	11				
4	7.5	7.5	9	15	13...18	400	GV2 RT21	0.350
5.5	9	11	11	18.5	17...23	400		
11								

(1) The thermal trip setting must be within the range marked on the graduated knob.

Characteristics:
pages 3/8 to 3/23

Dimensions:
page 3/70

Schemes:
page 3/76

3/50

References (continued)

TeSys protection components

Thermal-magnetic circuit-breakers GV2 RT



GV2 RT

3

For primaries of 3-phase transformers									
Control by rocker lever									
Standard power ratings				Setting range of thermal trips (1)	Magnetic tripping current Id ± 20 %	Reference	Weight		
230/240 V	400/415 V	440 V	500 V	690 V	A	A	kg		
kW	kW	kW	kW	kW	A	A	kg		
—	—	—	—	—	0.25...0.40	8	GV2 RT03	0.350	
—	—	—	—	—	0.40...0.63	13	GV2 RT04	0.350	
—	—	—	0.63	0.63	1	0.63...1	22	GV2 RT05	0.350
0.4	0.63	1	1	—	1...1.6	33	GV2 RT06	0.350	
0.63	1	—	1.6	1.6	1.6...2.5	51	GV2 RT07	0.350	
1	1.6	1.6	2	2.5	2.5...4	78	GV2 RT08	0.350	
2	2.5	2.5	4	4	4...6.3	138	GV2 RT10	0.350	
2.5	4	5	5	—	6...10	200	GV2 RT14	0.350	
4	6.3	6.3	—	10	9...14	280	GV2 RT16	0.350	
5	10	10	10	12.5	13...18	400	GV2 RT20	0.350	
6.3									

Accessory (2)

Description	Reference	Weight kg
Padlockable external operator (IP 54) black handle, blue legend plate	GV2 AP03	0.280

(1) The thermal trip setting must be within the range marked on the graduated knob.

(2) Other accessories such as mounting, cabling and marking accessories are identical to those used for GV2 ME motor circuit-breakers, see page 3/57.

Characteristics:
pages 3/8 to 3/23

Dimensions:
page 3/70

Schemes:
page 3/76

3/51

Schneider
Electric

References

TeSys protection components

Magnetic motor circuit-breakers GV2 LE

References

TeSys protection components

Magnetic motor circuit-breakers GV2 L, GV3 L and GK3 EF80



GV2 LE10

3

Magnetic motor circuit-breakers from 0.06 to 15 kW

GV2 L: control by rocker lever, connection by screw clamp terminals

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3								Magnetic protection rating	Tripping current Id ± 20 %	Use in association with thermal overload relay	Reference	Weight	
400/415 V	500 V	690 V	P	Icu	Ics (1)	P	Icu	Ics (1)	P	Icu	Ics (1)		
kW	kA	kW	kA	kW	kA	A	A	A				kg	
0.06	*	*	-	-	-	-	-	0.4	5	LR2 K0302	GV2 LE03	0.330	
0.09	*	*	-	-	-	-	-	0.4	5	LR2 K0304	GV2 LE03	0.330	
0.12	*	*	-	-	-	0.37	*	*	0.63	8	LR2 K0304	GV2 LE04	0.330
0.18	*	*	-	-	-	-	-	0.63	8	LR2 K0305	GV2 LE04	0.330	
-	-	-	-	-	-	0.55	*	*	1	13	LR2 K0305	GV2 LE05	0.330
0.25	*	*	-	-	-	-	-	1	13	LR2 K0306	GV2 LE05	0.330	
-	-	-	-	-	-	0.75	*	*	1	13	LR2 K0306	GV2 LE05	0.330
0.37	*	*	0.37	*	*	-	-	-	1	13	LR2 K0306	GV2 LE05	0.330
0.55	*	*	0.55	*	*	1.1	*	*	1.6	22.5	LR2 K0307	GV2 LE06	0.330
-	-	-	0.75	*	*	-	-	-	1.6	22.5	LR2 K0307	GV2 LE06	0.330
0.75	*	*	1.1	*	*	1.5	3	75	2.5	33.5	LR2 K0308	GV2 LE07	0.330
1.1	*	*	-	-	-	-	-	2.5	33.5	LR2 K0308	GV2 LE07	0.330	
1.5	*	*	1.5	*	*	3	3	75	4	51	LR2 K0310	GV2 LE08	0.330
-	-	-	2.2	*	*	-	-	-	4	51	LR2 K0312	GV2 LE08	0.330
2.2	*	*	3	50	100	4	3	75	6.3	78	LR2 K0312	GV2 LE10	0.330
3	*	*	4	10	100	5.5	3	75	10	138	LR2 K0314	GV2 LE14	0.330
4	*	*	5.5	10	100	-	-	-	10	138	LR2 K0316	GV2 LE14	0.330
-	-	-	-	-	-	7.5	3	75	10	138	LRD 14	GV2 LE14	0.330
-	-	-	-	-	-	9	3	75	14	170	LRD 16	GV2 LE16	0.330
5.5	15	50	7.5	6	75	11	3	75	14	170	LR2 K0321	GV2 LE16	0.330
7.5	15	50	9	6	75	15	3	75	18	223	LRD 21	GV2 LE20	0.330
9	15	40	11	4	75	18.5	3	75	25	327	LRD 22	GV2 LE22	0.330
11	15	40	15	4	75	-	-	-	25	327	LRD 22	GV2 LE22	0.330
15	10	50	18.5	4	75	22	3	75	32	416	LRD 32	GV2 LE32	0.330

(1) As % of Icu.
* > 100 kA.



GV2 L10

3

Motor circuit-breakers from 0.09 to 30 kW

GV2 L: Control by rotary knob, connection by screw clamp terminals

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3								Magnetic protection rating	Tripping current Id ± 20 %	Use in association with thermal overload relay (class 10 A)	Reference	Weight	
400/415 V	500 V	690 V	P	Icu	Ics (1)	P	Icu	Ics (1)	P	Icu	Ics (1)		
kW	kA	kW	kA	kW	kA	A	A	A				kg	
0.09	*	*	-	-	-	-	-	-	0.4	5	LRD 03	GV2 L03	0.330
0.12	*	*	-	-	-	0.37	*	*	0.63	8	LRD 04	GV2 L04	0.330
0.18	*	*	-	-	-	-	-	-	0.63	8	LRD 04	GV2 L04	0.330
-	-	-	-	-	-	0.55	*	*	1	13	LRD 05	GV2 L05	0.330
0.25	*	*	-	-	-	-	-	-	1	13	LRD 05	GV2 L05	0.330
-	-	-	-	-	-	0.75	*	*	1	13	LRD 06	GV2 L06	0.330
0.37	*	*	0.37	*	*	-	-	-	1	13	LRD 05	GV2 L05	0.330
0.55	*	*	0.55	*	*	1.1	*	*	1.6	22.5	LRD 06	GV2 L06	0.330
-	-	-	0.75	*	*	-	-	-	1.6	22.5	LRD 06	GV2 L06	0.330
0.75	*	*	1.1	*	*	1.5	3	75	2.5	51	LRD 07	GV2 L07	0.330
1.1	-	-	-	-	-	-	-	-	-	-	LRD 08	GV2 L08	0.330
1.5	*	*	1.5	*	*	3	4	100	4	51	LRD 08	GV2 L08	0.330
-	-	-	-	-	-	-	-	-	-	-	LRD 08	GV2 L08	0.330
2.2	*	*	3	*	*	4	4	100	6.3	78	LRD 10	GV2 L10	0.330
3	*	*	4	10	100	5.5	4	100	10	138	LRD 12	GV2 L14	0.330
4	-	-	-	-	-	-	-	-	-	-	LRD 14	GV2 L14	0.330
-	-	-	-	-	-	7.5	4	100	10	138	LRD 14	GV2 L14	0.330
-	-	-	-	-	-	9	4	100	14	170	LRD 16	GV2 L16	0.330
5.5	50	50	7.5	10	75	11	4	100	14	170	LRD 16	GV2 L16	0.330
7.5	50	50	9	10	75	15	4	100	18	223	LRD 21	GV2 L20	0.330
9	50	50	11	10	75	18.5	4	100	25	327	LRD 22	GV2 L22	0.330
11	50	50	15	10	75	-	-	-	25	327	LRD 22	GV2 L22	0.330
15	35	50	18.5	10	75	22	3	75	32	416	LRD 32	GV2 L32	0.330




GV3 L65

3

GV3 L: control by rotary knob, connection by EverLink® BTR screw connectors

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3								Magnetic protection rating	Tripping current Id
---	--	--	--	--	--	--	--	----------------------------	---------------------

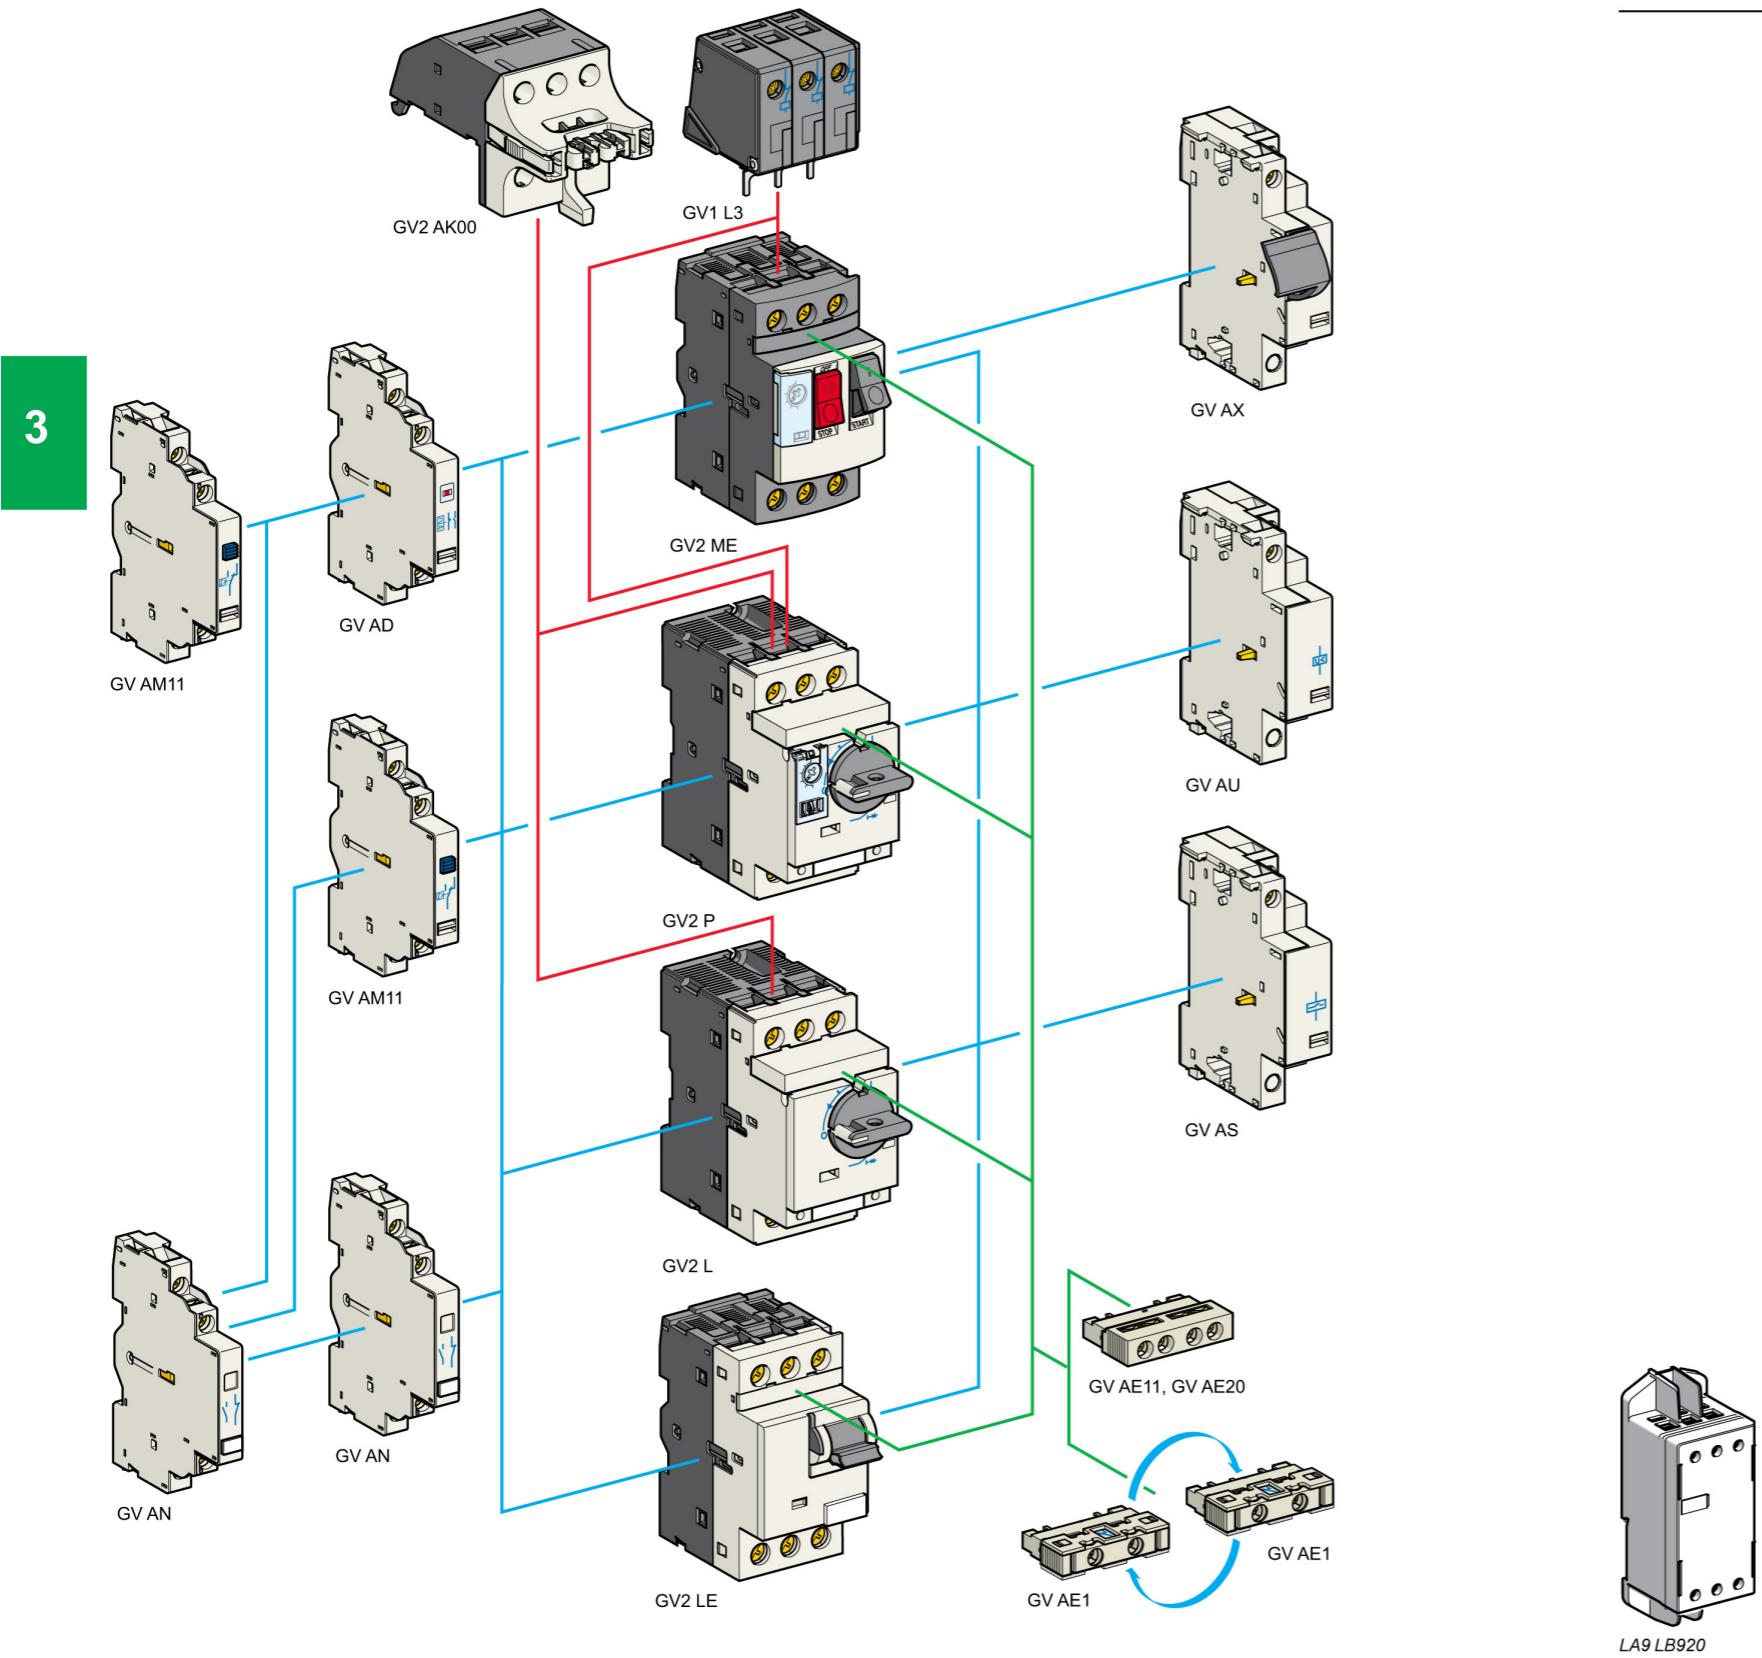


Contact blocks						
Description	Mounting	Maximum number	Type of contacts	Sold in lots of	Unit reference	Weight kg
Instantaneous auxiliary contacts	Front (1)	1	N/O or N/C (2)	10	GV AE1	0.015
			N/O + N/C	10	GV AE11	0.020
			N/O + N/O	10	GV AE20	0.020
	Side (LH)	2	N/O + N/C	1	GV AN11	0.050
Fault signalling contact + instantaneous auxiliary contact	Side (3) (LH)	1	N/O (fault)	+ N/O	GV AD1010	0.055
			+ N/C	1	GV AD1001	0.055
			N/C (fault)	+ N/O	GV AD0110	0.055
			+ N/C	1	GV AD0101	0.055
Short-circuit signalling contact	Side (LH)	1	C/O common point	1	GV AM11	0.045
Electric trips						
Mounting	Voltage			Reference	Weight kg	
Undervoltage or shunt trips (4)						
Side (1 block on RH side of circuit-breaker)	24 V	50 Hz		GV A•025	0.105	
		60 Hz		GV A•026	0.105	
48 V	50 Hz			GV A•055	0.105	
		60 Hz		GV A•056	0.105	
100 V	50 Hz			GV A•107	0.105	
	100...110 V	60 Hz		GV A•107	0.105	
110...115 V	50 Hz			GV A•115	0.105	
		60 Hz		GV A•116	0.105	
120...127 V	50 Hz			GV A•125	0.105	
		60 Hz		GV A•115	0.105	
127 V	50 Hz			GV A•207	0.105	
		60 Hz		GV A•207	0.105	
200 V	50 Hz			GV A•225	0.105	
		60 Hz		GV A•226	0.105	
220...240 V	50 Hz			GV A•385	0.105	
		60 Hz		GV A•386	0.105	
380...400 V	50 Hz			GV A•415	0.105	
		60 Hz		GV A•416	0.105	
415 V	50 Hz			GV A•385	0.105	
		60 Hz		GV A•415	0.105	
440 V	50 Hz			GV A•416	0.105	
		60 Hz		GV A•385	0.105	
480 V	50 Hz			GV A•505	0.105	
		60 Hz		GV A•505	0.105	
500 V	50 Hz			GV A•505	0.105	
		60 Hz		GV A•505	0.105	
600 V	50 Hz			GV A•505	0.105	
		60 Hz		GV A•505	0.105	
Undervoltage trip, INRS (can only be mounted on GV2 ME)						
Safety device for dangerous machines conforming to INRS and VDE 0113						
Side (1 block on RH side of circuit-breaker GV2 ME)	110...115 V	50 Hz		GV AX115	0.110	
		60 Hz		GV AX116	0.110	
127 V	60 Hz			GV AX115	0.110	
	220...240 V	50 Hz		GV AX225	0.110	
380...400 V	50 Hz			GV AX226	0.110	
		60 Hz		GV AX385	0.110	
415...440 V	50 Hz			GV AX386	0.110	
		60 Hz		GV AX415	0.110	
440 V	50 Hz			GV AX385	0.110	
		60 Hz		GV AX385	0.110	
Add-on contact blocks						
Description	Mounting	Maximum number		Reference	Weight kg	
Visible isolation block (5)	Front (1)	1		GV2 AK00	0.150	
Limiters	At top (GV2 ME and GV2 P)	1		GV1 L3	0.130	
	Independent	1		LA9 LB920	0.320	

- (1) Mounting of a GV AE contact block or a GV2 AK00 visible isolation block on GV2 P and GV2 L.
- (2) Choice of N/C or N/O contact operation, depending on which way round the reversible block is mounted.
- (3) The GV AD is always mounted next to the circuit-breaker.
- (4) To order an undervoltage trip: replace the dot (•) in the reference with a U, example: GV AU025.
To order a shunt trip: replace the dot (•) in the reference with an S, example: GV AS025.
- (5) Visible isolation of the 3 poles upstream of circuit-breaker GV2 P and GV2 L.
Visible isolation block GV2 AK00 cannot be used with motor circuit-breakers GV2 P32 and GV2 L32 (ith max = 25 A).

TeSys protection components

Thermal-magnetic and magnetic motor circuit-breakers GV2 with screw clamp connections
Accessories


3

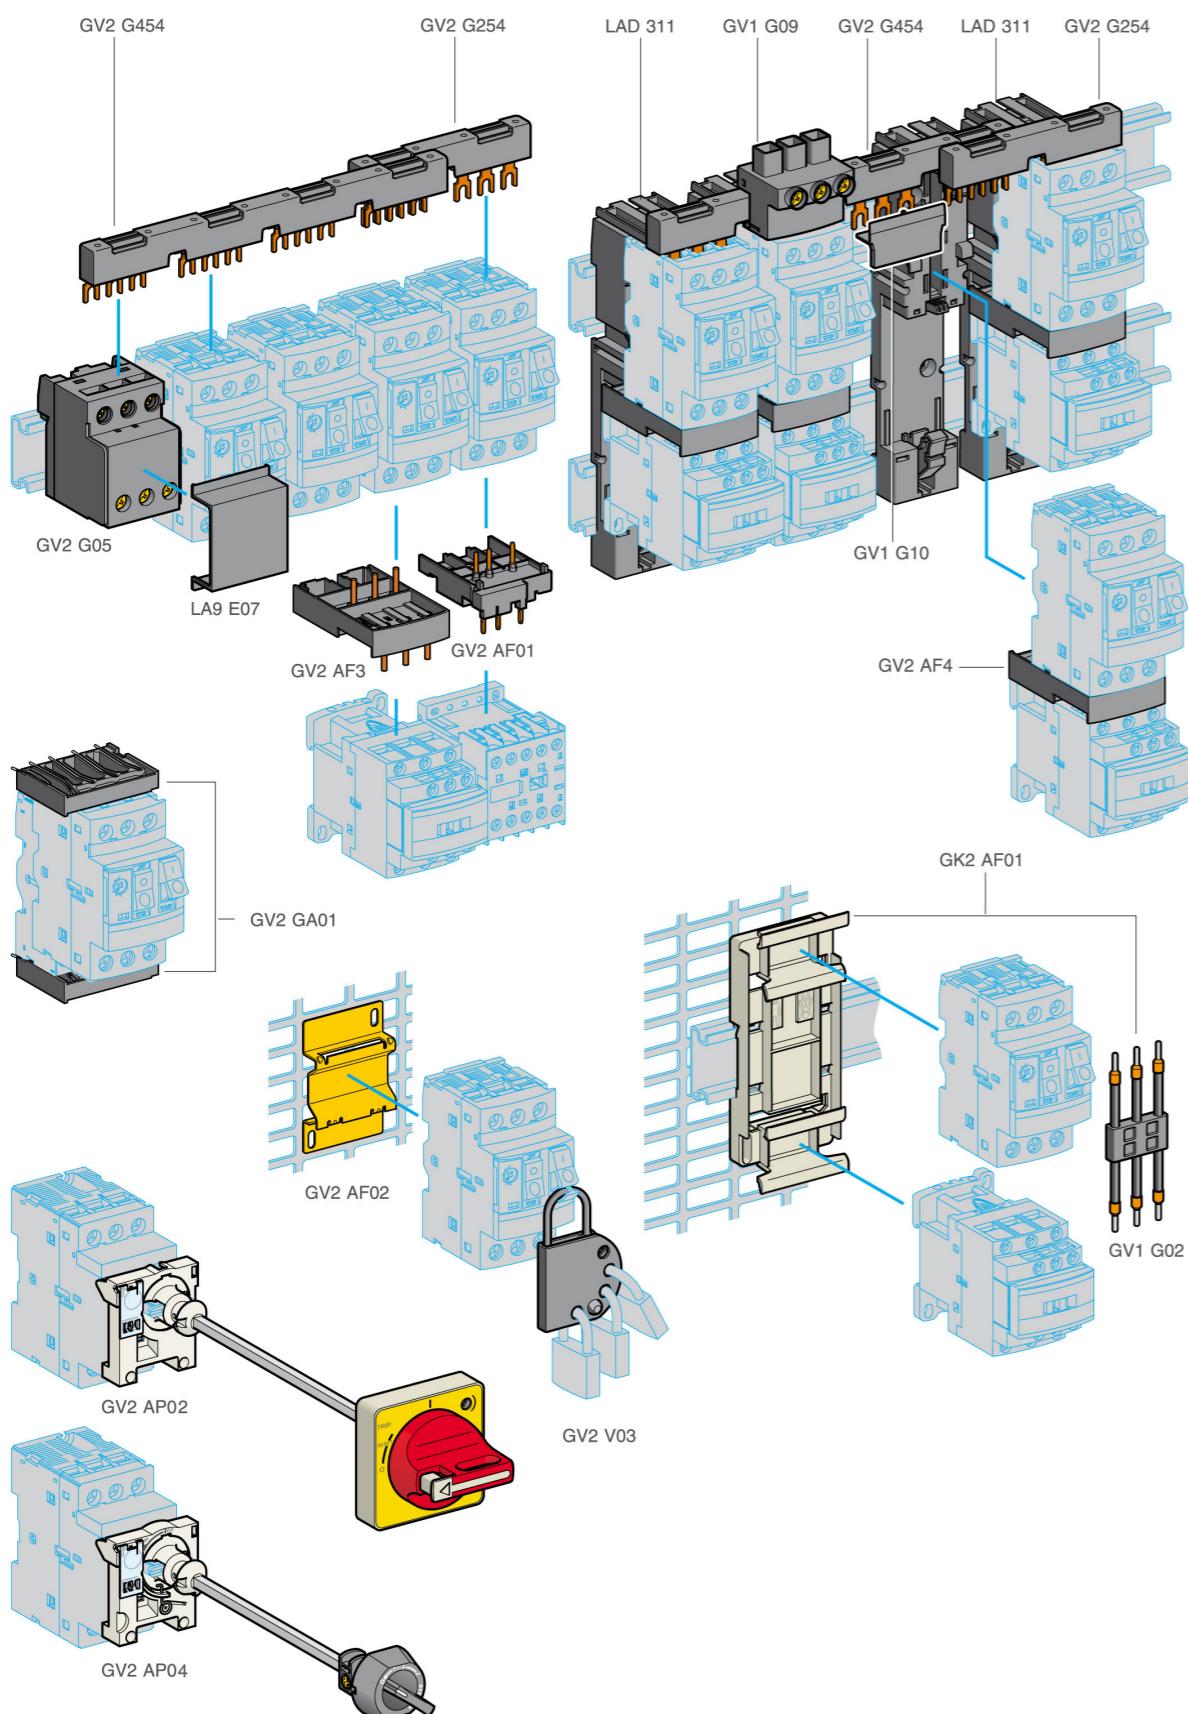

3

Accessories					
Description	Application	Sold in lots of	Unit reference	Weight kg	
Adapter plates	For mounting a GV2 ME or GV2 LE by screw fixing	10	GV2 AF02	0.021	
	For mounting a GV2 ME or GV2 P and contactor LC1 D09...D38 with front faces aligned	1	LAD 311	0.040	
Height compensation plate	7.5 mm	10	GV1 F03	0.003	
	Between GV2 and contactor LC1 K or LP1 K	10	GV2 AF01	0.020	
Combination blocks	Between GV2 and contactor LC1 D09...D38	10	GV2 AF3	0.016	
	Between GV2 mounted on LAD 311 and contactor LC1 D09...D38	10	GV2 AF4	0.016	
Motor starter adapter plate	With 3-pole connection for mounting a GV2 and a contactor LC1 D09...D25	1	GK2 AF01	0.120	
Description					
Sets of 3-pole 63 A busbars	Application	Pitch	Reference	Weight kg	
	2 tap-offs	mm			
Sets of 3-pole 63 A busbars	45	GV2 G245	0.036		
	54	GV2 G254	0.038		
	72	GV2 G272	0.042		
3 tap-offs	45	GV2 G345	0.058		
	54	GV2 G354	0.060		
	45	GV2 G445	0.077		
4 tap-offs	54	GV2 G454	0.085		
	72	GV2 G472	0.094		
	54	GV2 G554	0.100		
Description					
Protective end cover	Application	Sold in lots of	Unit reference	Weight kg	
	For unused busbar outlets	5	GV1 G10	0.005	
Terminal block for supply to one or more GV2 G busbar sets	Connection from the top	1	GV1 G09	0.040	
	Can be fitted with current limiter GV1 L3 (GV2 ME and GV2 P)	1	GV2 G05	0.115	
Cover for terminal block	For mounting in modular panels	10	LA9 E07	0.005	
Flexible 3-pole connection for connecting a GV2 to a contactor LC1-D09...D25	Centre distance between mounting rails: 100...120 mm	10	GV1 G02	0.013	
Set of connections upstream/downstream	For connecting GV2 ME to a printed circuit board	10	GV2 GA01	0.045	
"Large Spacing" adapter UL 508 type E	For GV2 P●H7 (except 32 A)	1	GV2 GH7	0.040	
Clip-in marker holders (supplied with each circuit-breaker)	For GV2 P, GV2 L, GV2 LE and GV2 RT (8 x 22 mm)	100	LA9 D92	0.001	
External operators					
Description	Reference	Weight kg			
For GV2 P and GV2 L (150 to 290 mm)	GV2 AP01	0.200			
	GV2 AP02	0.200			
For GV2 LE	GV2 AP04	0.104			
	GV2 AP03	0.280			
Padlocking device					
Description	Reference	Weight kg			
For all GV2 device	GV2 V03	0.092			

Dimensions:
pages 3/66 to 3/83

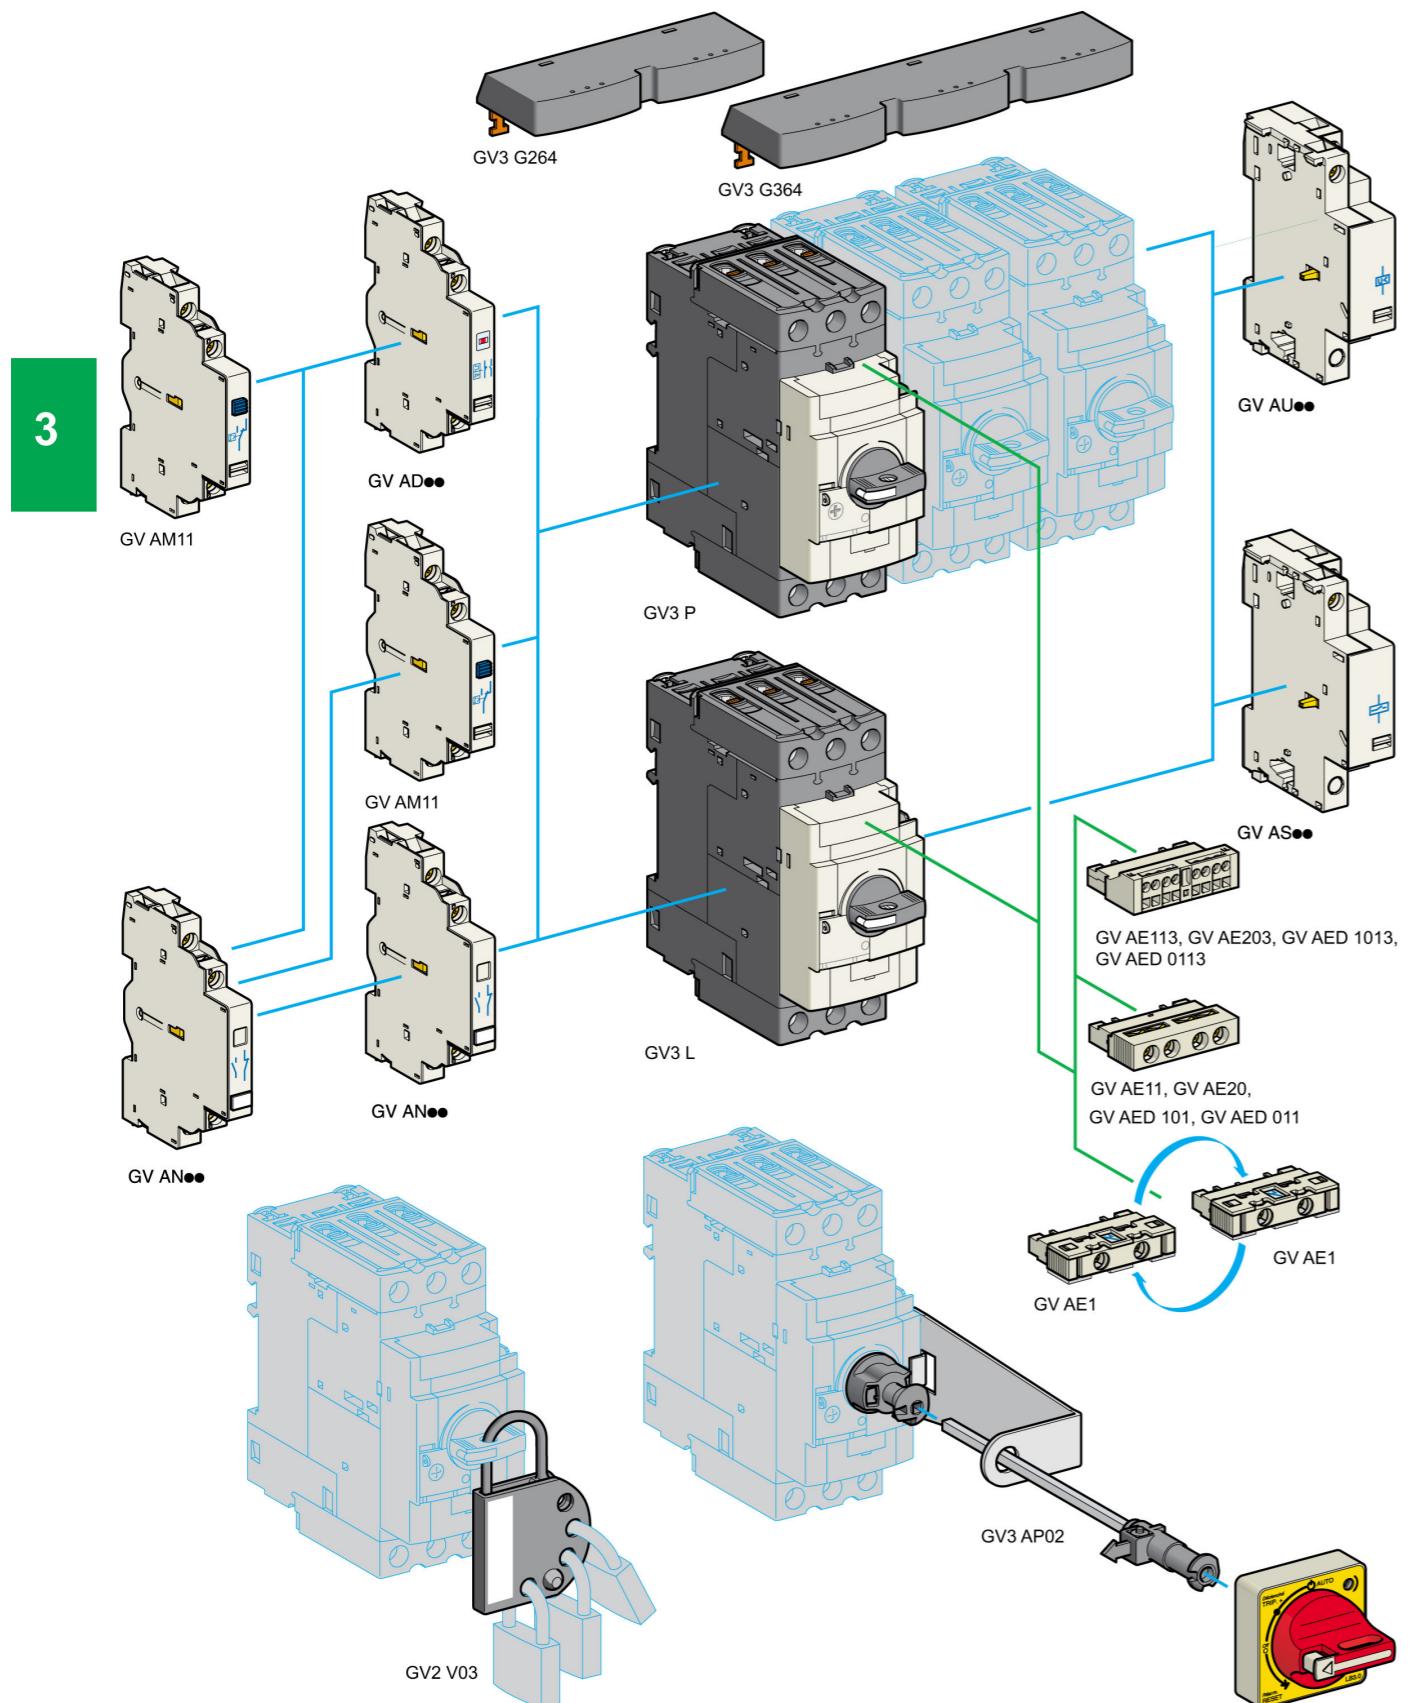

3

3

Contact blocks

Description	Mounting	Maximum number	Type of contacts	Sold in lots of	Unit reference	Weight kg
Instantaneous auxiliary contacts	Front	1	N/O or N/C (1)	10	GV AE1	0.015
			N/O + N/C	10	GV AE11 (2)	0.020
	Side (LH)	2	N/O + N/O	10	GV AE20 (2)	0.020
			N/O + N/O	1	GV AN11 (2)	0.050
Fault signalling contact + instantaneous auxiliary contact	Front	1	N/O (fault) + N/O	1	GV AED101 (2)	0.020
			N/O (fault) + N/C	1	GV AED011 (2)	0.020
	Side (3) (LH)	1	N/O (fault) + N/O	1	GV AD1010	0.055
			+ N/C	1	GV AD1001	0.055
Short-circuit signalling contact	Side (LH)	1	N/C (fault) + N/O	1	GV AD0110	0.055
			+ N/C	1	GV AD0101	0.055
			C/O common point	1	GV AM11	0.045

Electric trips - undervoltage or shunt (4)

Mounting	Voltage	Reference	Weight kg	
Side (1 block on RH side of circuit-breaker)	24 V	50 Hz	GV A•025	0.105
		60 Hz	GV A•026	0.105
48 V	50 Hz	GV A•055	0.105	
		60 Hz	GV A•056	0.105
100	50 Hz	GV A•107	0.105	
	100...110 V	60 Hz	GV A•107	0.105
110...115 V	50 Hz	GV A•115	0.105	
		60 Hz	GV A•116	0.105
120...127 V	50 Hz	GV A•125	0.105	
		60 Hz	GV A•115	0.105
127 V	50 Hz	GV A•207	0.105	
		60 Hz	GV A•207	0.105
200 V	50 Hz	GV A•225	0.105	
		60 Hz	GV A•226	0.105
200...220 V	50 Hz	GV A•385	0.105	
		60 Hz	GV A•386	0.105
220...240 V	50 Hz	GV A•415	0.105	
		60 Hz	GV A•416	0.105
380...400 V	50 Hz	GV A•385	0.105	
		60 Hz	GV A•386	0.105
415...440 V	50 Hz	GV A•415	0.105	
		60 Hz	GV A•416	0.105
415 V	60 Hz	GV A•385	0.105	
		60 Hz	GV A•415	0.105
440 V	60 Hz	GV A•415	0.105	
		60 Hz	GV A•505	0.105
480 V	60 Hz	GV A•505	0.105	
		60 Hz	GV A•505	0.105
500 V	50 Hz	GV A•505	0.105	
		60 Hz	GV A•505	0.105
600 V	60 Hz	GV A•505	0.105	
		60 Hz	GV A•505	0.105

Padlockable external operators for GV3 P and GV3 L

Description	Reference	Weight kg
External operators comprising: an LU9 AP1• handle, a shaft (max. length: 260 mm), a bracket and an adaptor.	GV3 AP01	0.294
Padlocking in "Off" position Red handle, yellow front plate, IP 54	GV3 AP02	0.294
Handles only Black handle, blue front plate, IP 54	LU9 AP11	0.105
Red handle, yellow front plate, IP 54	LU9 AP12	0.105

Accessories

Description	For circuit-breakers	Reference	Weight kg
Sets of 3-pole 115 A busbars	2 tap-off	GV3 P•• and GV3 L••	GV3 G264 0.150
Pitch: 64 mm	3 tap-off	GV3 P•• and GV3 L••	GV3 G364 0.250
Cover "Large Spacing" UL 508 type E (Only one cover required on supply side)	GV3 P••	GV3 G66	0.020
IP 20 cover (Two covers required per breaker)	GV3 P••6 and GV3 L••6	LAD 96570	0.021
IP 20 cover for use when mounted with circuit-breakers	GV3 P••6 and GV3 L••6	LAD 96575	0.010
Size 4 Allen key, insulated, 1000 V	GV3 P•• and GV3 L••	LAD ALLEN4 (5)	0.026
Padlocking device for use with up to 4 padlocks (not supplied) Ø 6 mm shank max. GV3 P••6 and GV3 L••6	GV3 P•• and GV3 L••	GV2 V03	0.092
Retrofit plate for screw fixing	Replacement of GV3 ME with GV3 P•• or GV2 P••	LAD 7X3	0.150

(1) Choice of N/C or N/O contact operation, depending on which way round the reversible block is mounted.

(2) Contact blocks available in version with spring terminal connections. Add a figure 3 at the end of the references selected above. Example: GV AED101 becomes GV AED1013.

(3) The GVAD•• is always mounted next to the circuit-breaker.



(4) To order an undervoltage trip: replace the dot (•) in the reference with a U, example: GV AU025.

To order a shunt trip: replace the dot (•) in the reference with an S, example: GV AS025.

(5) Sold in lots of 5.

3

3

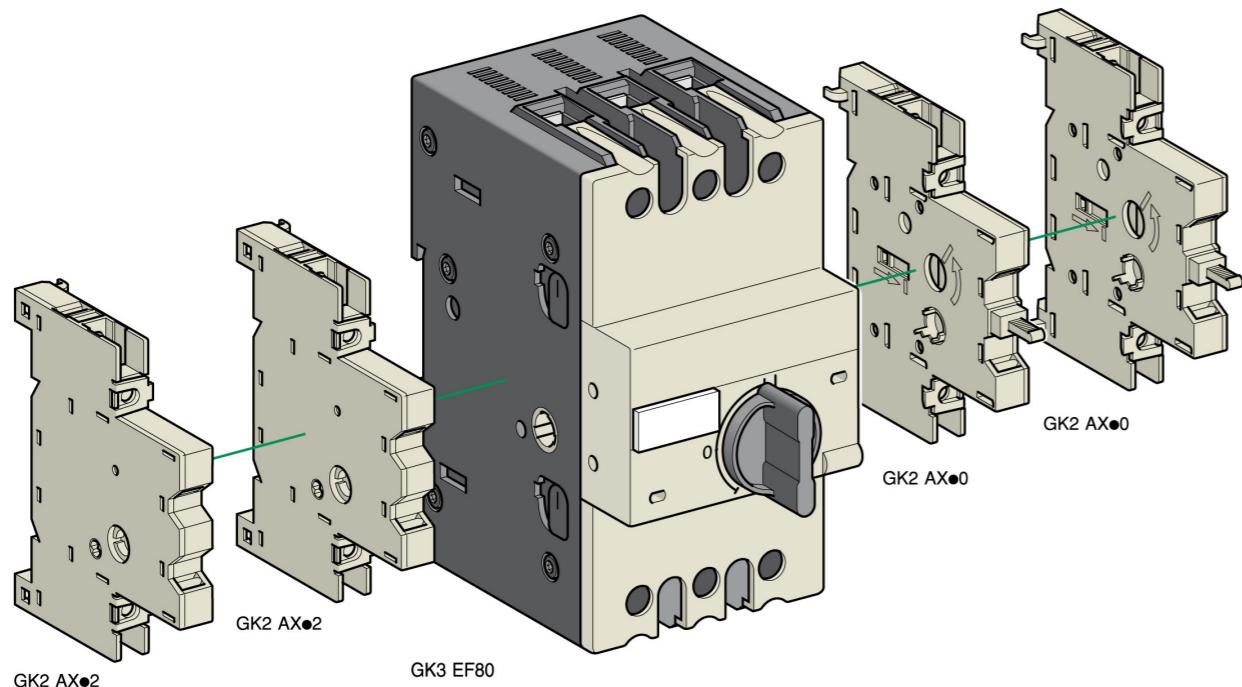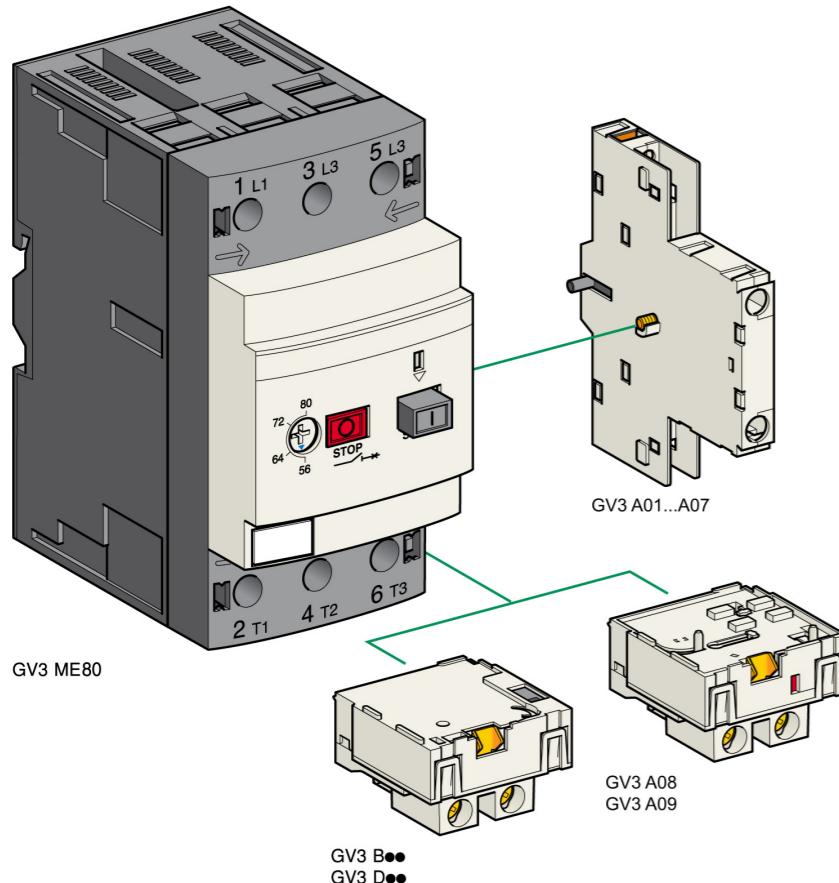

For thermal-magnetic motor circuit-breakers GV3 ME80

Contact blocks	Description	Type of standard early break contacts	Reference	Weight kg
Instantaneous auxiliary contact blocks (1 per circuit-breaker)		N/C + N/O N/O + N/O N/C + N/O + N/O N/O + N/O + N/O N/O + N/O + 2 volt-free terminals N/C + N/O + 2 volt-free terminals	GV3 A01 GV3 A02 GV3 A03 GV3 A05 GV3 A06 GV3 A07	0,060 0,060 0,070 0,070 0,070 0,070

Fault signalling contacts (1)	N/C N/O	Reference	Weight kg
	N/C	GV3 A08	0,030
	N/O	GV3 A09	0,030

Electric trips	Description	Voltages	Reference	Weight kg
Udervoltage trips (1)		50 Hz 60 Hz		
		110, 120, 127 V 120, 127 V	GV3 B11	0,070
		220, 240 V 277 V	GV3 B22	0,070
		380, 415 V 440 V, 480 V	GV3 B38	0,070

Accessory	Description	Sold in lots of	Unit reference	Weight kg
	Padlocking device, for locking the Start button (on open-mounted product)	5	GV1 V02	0,010

For magnetic circuit-breaker GK3 EF80


Contact blocks	Description	Number of poles	Reference	Weight kg
Auxiliary contact blocks for On-Off signalling and "control circuit test" function (1 or 2 blocks per device) mounted on RH side of GK3 EF80		N/O N/O + N/O N/C + N/O	GK2 AX10 GK2 AX20 GK2 AX50	0,025 0,031 0,031
Instantaneous fault signalling contact blocks (1 or 2 blocks per device) mounted on LH side of GK3 EF80		N/O N/O + N/O N/C + N/O	GK2 AX12 GK2 AX22 GK2 AX52	0,025 0,031 0,031

Accessories	Description	Reference	Weight kg
	Padlocking device for padlocking the operator, using up to 3 padlocks (padlocks to be ordered separately)	GK3 AV01	0,020

External operator for mounting on enclosure door. Red Ø 40 knob on yellow plate, padlockable in position O (with up to 3 padlocks). Door locked when knob in position I, and when knob padlocked in position O.	GK3 AP03	0,300
---	----------	-------

(1) 1 voltage trip OR 1 fault signalling contact to be fitted inside the motor circuit-breaker.

Other versions 24 to 690 V, 50 or 60 Hz voltage trips for circuit-breakers GV3 ME80. Please consult your Regional Sales Office.

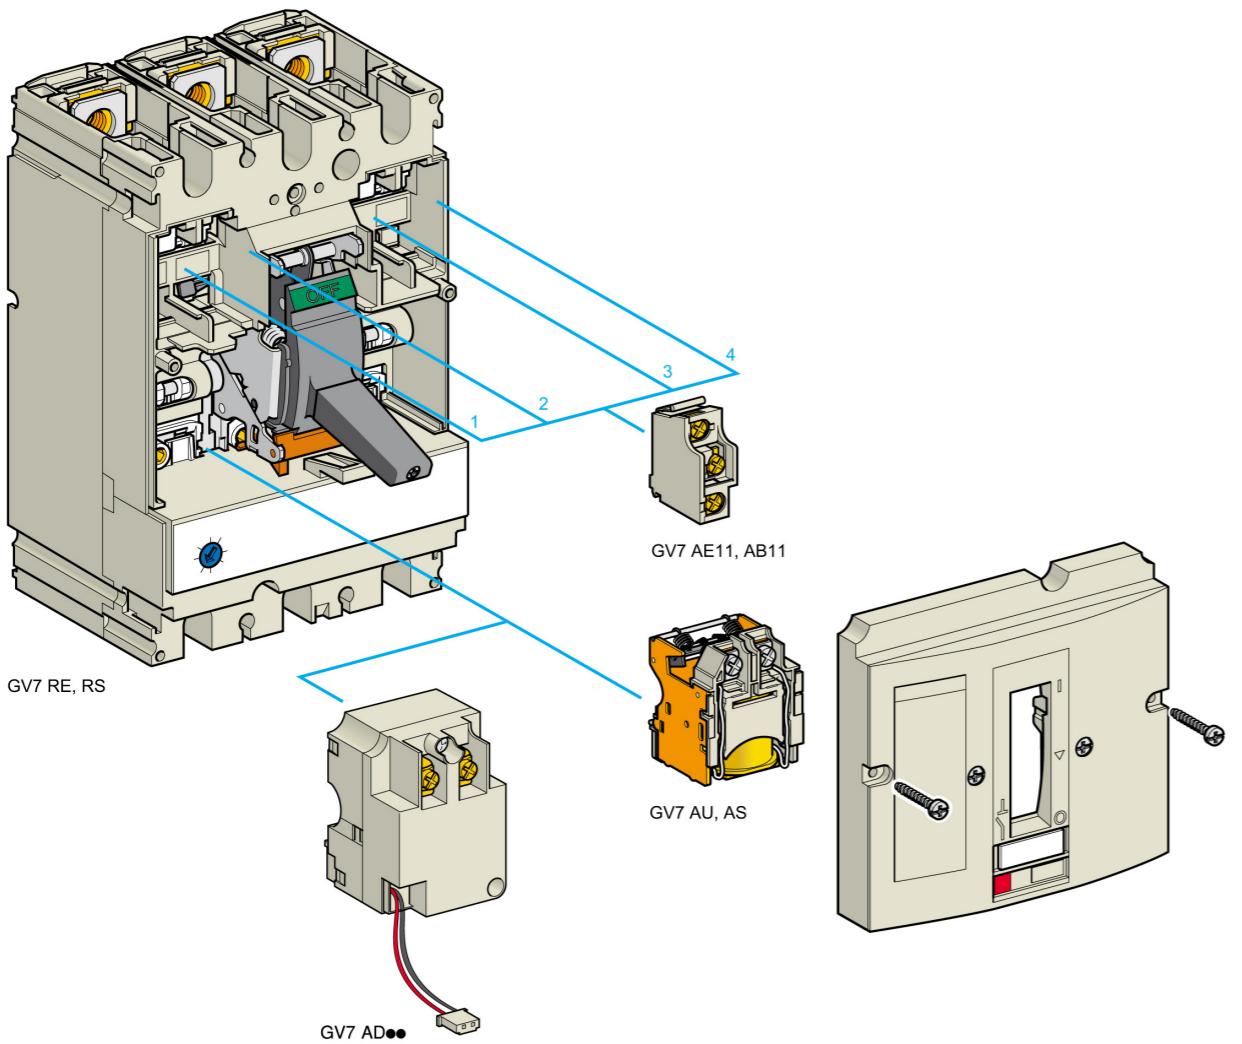**Add-on auxiliary contacts**

These allow remote indication of the circuit-breaker contact states. They can be used for signalling, electrical locking, relaying, etc. They are available in two versions: standard and low level. They include a terminal block and the auxiliary circuits leave the circuit-breaker through a hole provided for this purpose. They perform the following functions, depending on where they are located in the circuit-breaker:

Location	Function	Application
1 and/or 4	C/O contact	Indicates the position of the circuit-breaker poles
2	Trip indication	Indicates that the circuit-breaker has tripped due to an overload, a short-circuit, a differential fault or the operation of a voltage trip (undervoltage or shunt trip), or of the "push to trip" test button. It resets when the circuit-breaker is reset.
3	Electrical fault indication	Indicates that the circuit-breaker has tripped due to an overload, a short-circuit or a differential fault. It resets when the circuit-breaker is reset.

Type	Reference	Weight kg
Standard	GV7 AE11	0.015
Low level	GV7 AB11	0.015

Fault discrimination devices

These make it possible to:

- either differentiate a thermal fault from a magnetic fault,
- or open the contactor only in the event of a thermal fault.

Voltage	Reference	Weight kg
~ 24...48 and ≈ 24...72 V	GV7 AD111 (1)	0.100
≈ 110...240 V	GV7 AD112 (1)	0.100

Electric trips


These allow the circuit-breaker to be tripped via an electrical control signal.

- Undervoltage trip GV7 AU
 - Trips the circuit-breaker when the control voltage drops below the tripping threshold, which is between 0.35 and 0.7 times the rated voltage.
 - Circuit-breaker closing is only possible if the voltage exceeds 0.85 times the rated voltage.
- Shunt trip GV7 AS
 - Trips the circuit-breaker when the control voltage rises above 0.7 times the rated voltage.
- Operation (GV7 AU or GV7 AS)
 - When the circuit-breaker has been tripped by a GV7 AU or AS, it must be reset either locally or by remote control. (For remote control, please consult your Regional Sales Office).
 - Tripping has priority over manual closing: if a tripping instruction is present, manual action does not result in closing, even temporarily, of the contacts.
 - Durability: 50 % of the mechanical durability of the circuit-breaker.

Type	Voltage	Reference	Weight kg
Undervoltage trip	48 V, 50/60 Hz	GV7 AU055 (1)	0.105
	110...130 V, 50/60 Hz	GV7 AU107 (1)	0.110
	200...240 V, 50/60 Hz	GV7 AU207 (1)	0.110
	380...440 V, 50/60 Hz	GV7 AU387 (1)	0.105
	525 V, 50 Hz	GV7 AU525 (1)	0.100
Shunt trip	48 V, 50/60 Hz	GV7 AS055 (1)	0.105
	110...130 V, 50/60 Hz	GV7 AS107 (1)	0.110
	200...240 V, 50/60 Hz	GV7 AS207 (1)	0.110
	380...440 V, 50/60 Hz	GV7 AS387 (1)	0.105
	525 V, 50 Hz	GV7 AS525 (1)	0.100


(1) For mounting of a GV7 AD or a GV7 AU or AS.

References

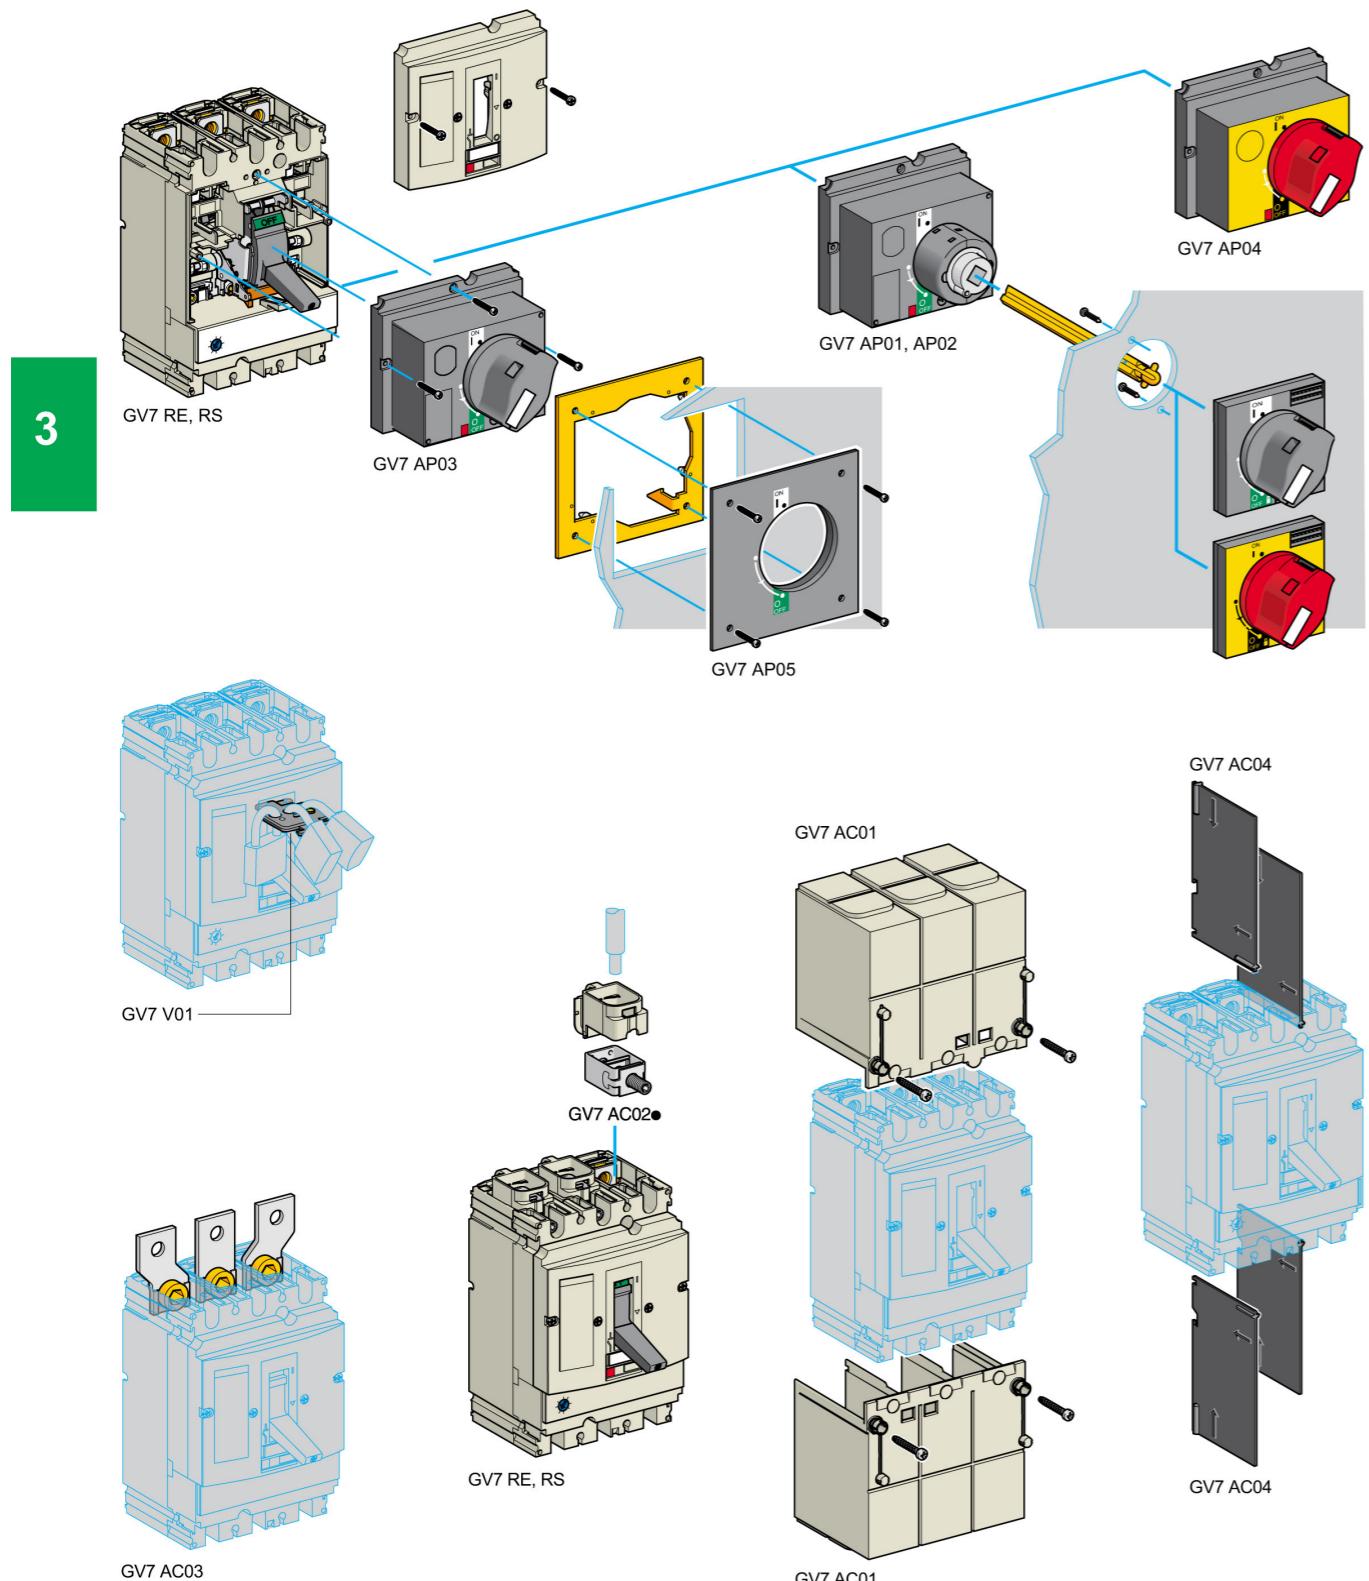

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV7 R with screw clamp connections
Accessories

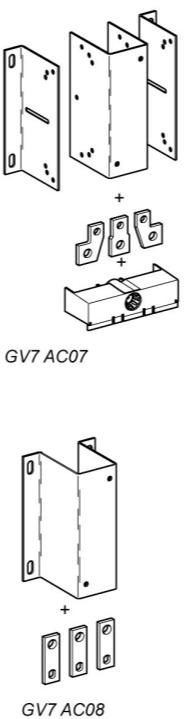

Cabling accessories

Description	Application	For use on contactors	Sold in lots of	Unit reference	Weight kg
Clip-on connectors for GV7 R	Up to 150 A, 1.5...95 mm ²	–	3	GV7 AC021	0.300
	Up to 220 A, 1.5...185 mm ²	–	3	GV7 AC022	0.350
Spreader 3-pole (1)	To increase the pitch to 45 mm	–	1	GV7 AC03	0.180
Terminal shields IP 40 (1)	Supplied with sealing accessory	–	1	GV7 AC01	0.125
Phase barriers	Safety accessories used when fitting of shields is impossible	–	2	GV7 AC04	0.075
Insulating screens	Ensure insulation between the connections and the backplate	–	2	GV7 AC05	0.075
Kits for combination with contactor(2)	Allowing link between the circuit-breaker and the contactor. The cover provides protection against direct finger contact	LC1 F115...F185 LC1 F225 and F265 LC1 D115 and D150	1 1 1	GV7 AC06 GV7 AC07 GV7 AC08	0.550 0.550 0.550

Direct rotary handle

Replaces the circuit-breaker front cover; secured by screws. It includes a device for locking the circuit-breaker in the O (Off) position by means of up to 3 padlocks with a shank diameter of 5 to 8 mm (padlocks not included). A conversion accessory allows the direct rotary handle to be mounted on the enclosure door. In this case, the door cannot be opened if the circuit-breaker is in the "ON" position. Circuit-breaker closing is inhibited if the enclosure door is open.

Description	Type	Degree of protection	Reference	Weight kg
Direct rotary handle	Black handle, black legend plate	IP 40	GV7 AP03	0.205
	Red handle, yellow legend plate	IP 40	GV7 AP04	0.205
Adapter plate (3)	Four mounting direct rotary handle on enclosure door	IP 43	GV7 AP05	0.100

Extended rotary handle

Allows a circuit-breaker installed in the back of an enclosure to be operated from the front of the enclosure.

It comprises:

- a unit which screws onto the front cover of the circuit-breaker,
- an assembly (handle and front plate) to be fitted on the enclosure door,
- an extension shaft which must be adjusted (distance between the mounting surface and the door: 185 mm minimum, 600 mm maximum). It includes a device for locking the circuit-breaker in the O (Off) position by means of up to 3 padlocks with a shank diameter of 5 to 8 mm (padlocks not included). This prevents the enclosure door from being opened.

Description	Type	Degree of protection	Reference	Weight kg
Extended rotary handle	Black handle, black legend plate	IP 55	GV7 AP01	0.775
	Red handle, yellow legend plate	IP 55	GV7 AP02	0.775

Locking device

Allows circuit-breakers not fitted with a rotary handle to be locked in the O (Off) position by means of up to 3 padlocks with a shank diameter of 5 to 8 mm (padlocks not included).

Description	Application	Reference	Weight kg
Locking device	For circuit-breaker not fitted with a rotary handle	GV7 V01	0.100

(1) Terminal shields cannot be used together with spreaders.

(2) The kit comprises links, a protective shield and a depth adjustable metal bracket for the breaker.

(3) This conversion accessory makes it impossible to open the door if the device is closed and prevents the device from being closed if the door is open.

Dimensions:
pages 3/73 to 3/75

Dimensions

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV2 ME and GV2 P


Mounting, dimensions

TeSys protection components


Thermal-magnetic motor circuit-breakers
GV2 ME and GV2 P

Dimensions


GV2 ME

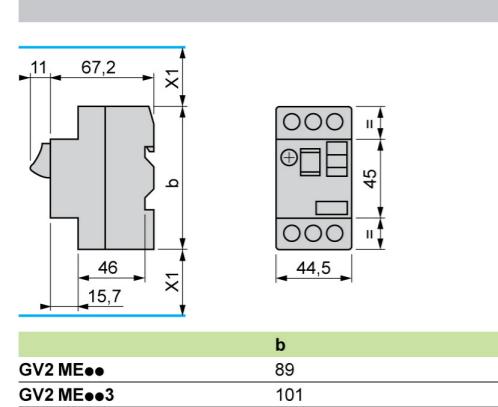


GV AX




GV AD, AM, AN, AU, AS, AX




GV AE




GV2 P

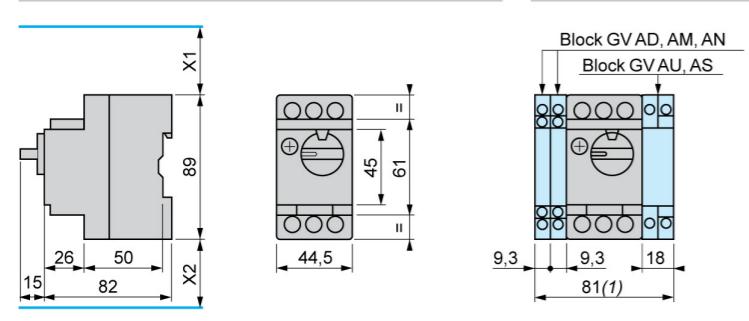


GV AD, AM, AN, AU, AS



GV2 AK00

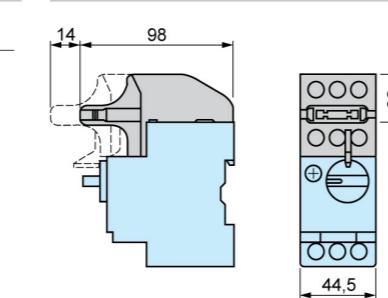


GV2 GH7

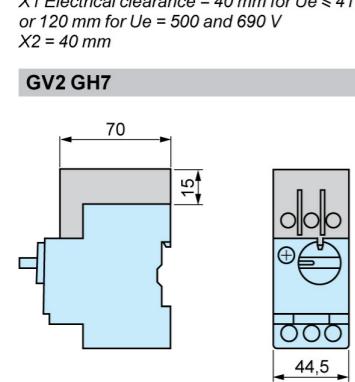


Mounting

GV2 ME

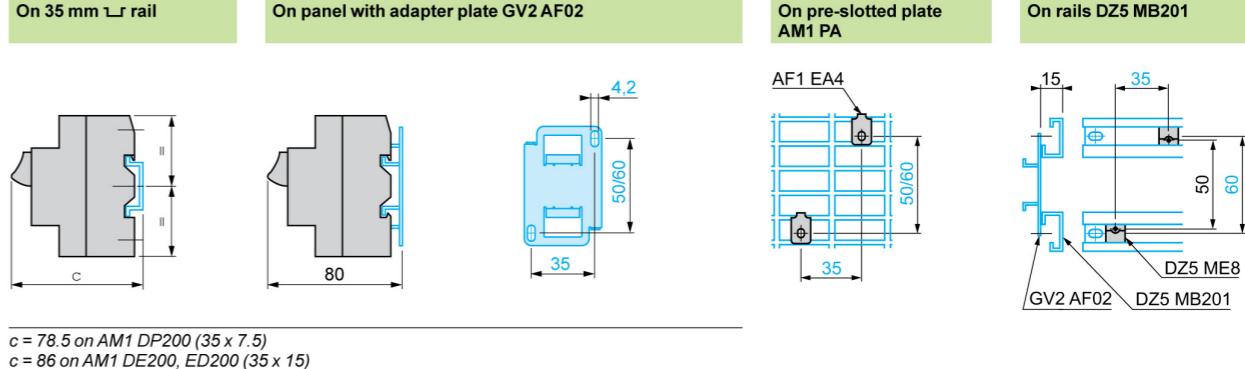


GV2 P

On rail AM1 DE200, ED200 (35 x 15)

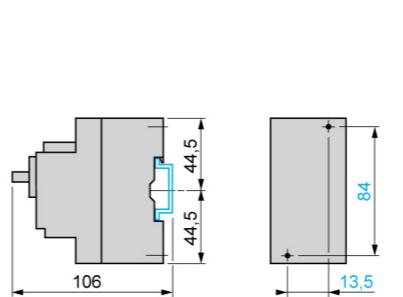


Panel mounted

AM1 PA




On pre-slotted plate

AM1 PA




Adapter plate GK2 AF01

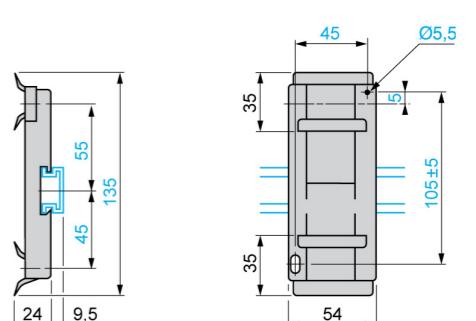


Dimensions


GV2 AF01 Combination GV2 ME + TeSys K contactor

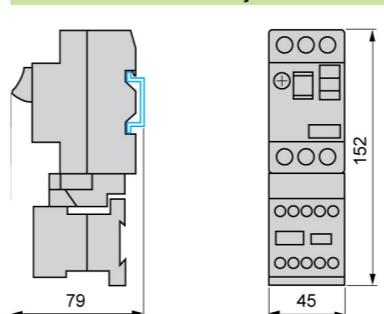

GV2 AF3 Combination GV2 ME + TeSys D contactor

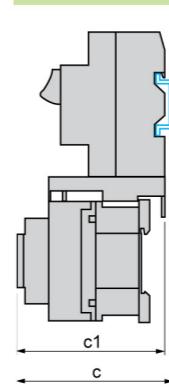

Combination GV2 P + TeSys D contactor

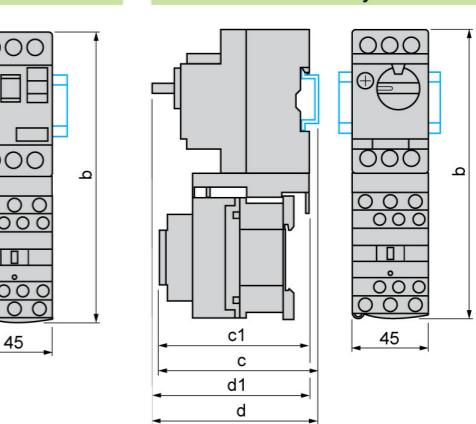

GV2 ME + LC1 D09 ...D18

b	176.4	186.8
c1	94.1	100.4
c	99.6	105.9

GV2 P + LC1 D09 ...D18

b	176.4	186.8
c1	100.1	106.4
c	105.6	111.9
d1	95	95
d	100.5	100.5

**Dimensions,
mounting (continued)**


TeSys protection components
Thermal-magnetic motor circuit-breakers
GV2 ME and GV2 P

Dimensions (continued)

GV2 AF4 + LAD 311

Combination GV2 ME + TeSys D contactor


Combination GV2 P + TeSys D contactor

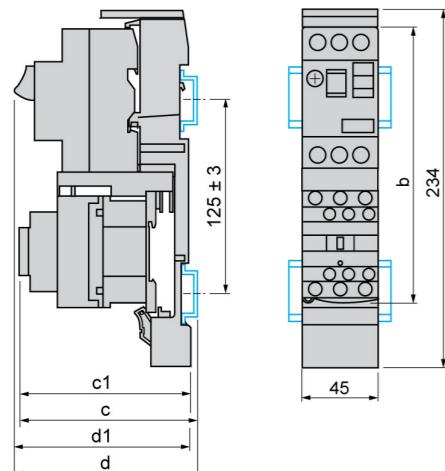


GV2 ME +	LC1 D09...D18	LC1 D25 and D32
b	176.4	186.8
c1	103.1	136.4
c	135.6	141.9
d1	107	107
d	112.5	112.5

GV2 P +	LC1 D09...D18	LC1 D25 and D32
b	176.4	186.8
c1	136.5	142.4
c	141.6	147.9

GV2 ME + GV1 L3 (current limiter)

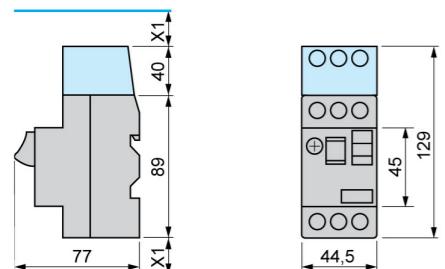



X1 = 10 mm for Ue = 230 V
or 30 mm for 230 V < Ue ≤ 690 V

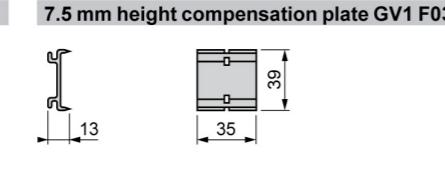

Mounting

Mounting of external operator GV2 AP01 or GV2 AP02 for motor circuit-breakers GV2 P

Door cut-out

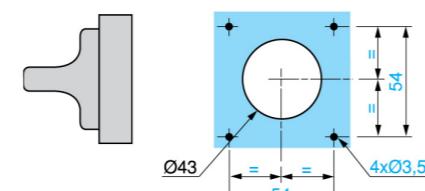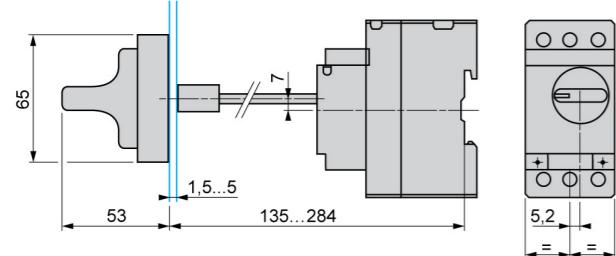


**Dimensions,
mounting (continued)**

TeSys protection components
Thermal-magnetic motor circuit-breakers
GV2 ME and GV2 P

GV2 ME, GV2 P

Sets of busbars GV2 G445, GV2 G454, GV2 G472, with terminal block GV2 G05

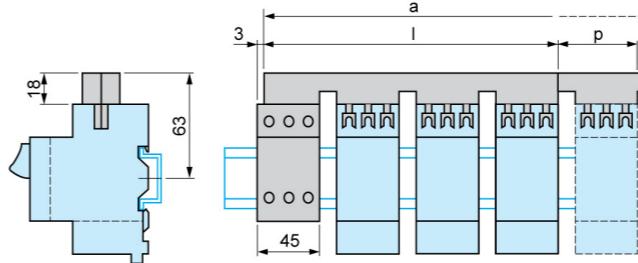



GV2 G445 (4 x 45 mm) 179 45

GV2 G454 (4 x 54 mm) 206 54

GV2 G472 (4 x 72 mm) 260 72

Number of tap-offs	5	6	7	8
GV2 G445	224	269	314	359
GV2 G454	260	314	368	422
GV2 G472	332	404	476	548

Sets of busbars GV2 G●● with terminal block GV1 G09


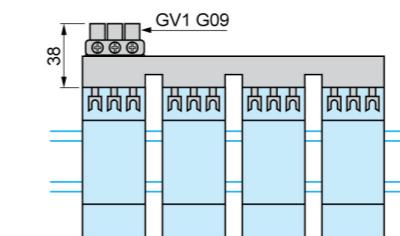


GV2 G245 (2 x 45 mm) 89

GV2 G254 (2 x 54 mm) 98

GV2 G272 (2 x 72 mm) 116

Sets of busbars GV2 G554

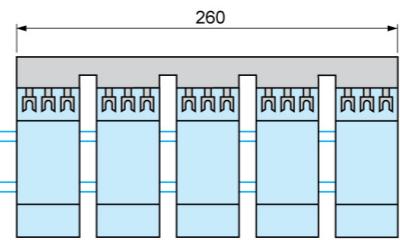

GV2 G345 (3 x 45 mm) 134

GV2 G354 (3 x 54 mm) 152


Dimensions, mounting

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV2 RT

GV2 RT

Dimensions

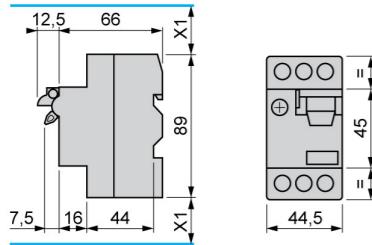


X1: Electrical clearance = 40 mm for $U_e < 690$ V


3

Mounting

Mounting of external operator GV2 AP03

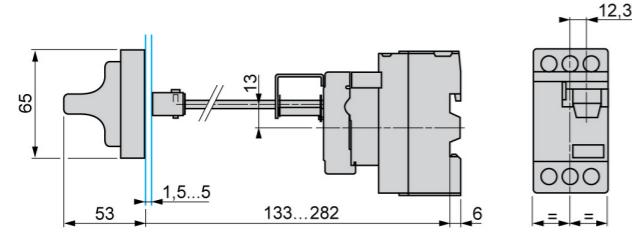


On 35 mm ↗ rail




$C = 80$ on AM1 DP200 (35 x 7.5)
 $C = 88$ on AM1 DE200, ED200 (35 x 15)


On panel with adapter plate GV2 AF02



On pre-slotted plate AM1 PA



On rails DZ5 MB




Dimensions, mounting

TeSys protection components

Thermal-magnetic motor circuit-breakers GV3 P

GV3 P

Dimensions

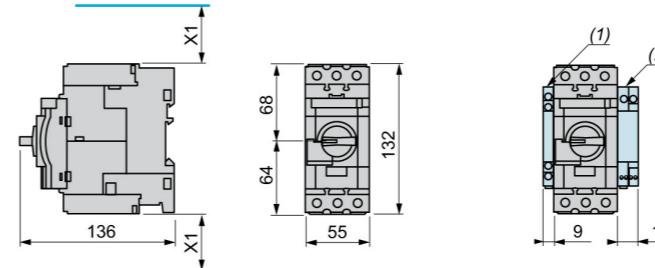

X1 = Electrical clearance (ISC max)
40 mm for $U_e \leq 500$ V, 50 mm for $U_e \leq 690$ V


(1) Blocks GV AN●●, GV AD●● and GV AM11
(2) Blocks GV3 AU●● and GV3 AS●●

3


Note: Leave a gap of 9 mm between 2 circuit-breakers: either an empty space or side-mounting add-on contact blocks.
Horizontal mounting is possible up to 40 °C

Mounting


Mounting with TeSys contactor LC1 D40A...D65A

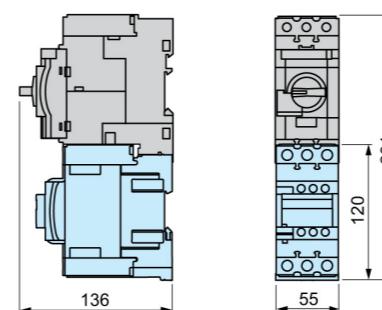


Side by side mounting with TeSys contactor LC1 D40A...D65A (S-shape busbar system GV3 S)

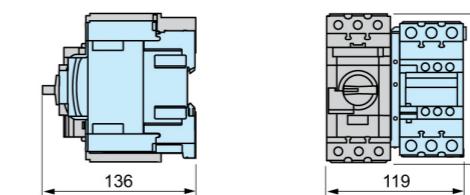


Mounting on rail AM1 DE200 or AM1 ED201



Panel mounting, using M4 screws

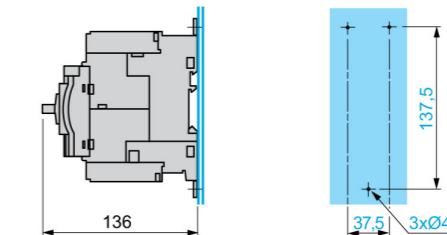

Mounting on pre-slotted plate AM1 PA

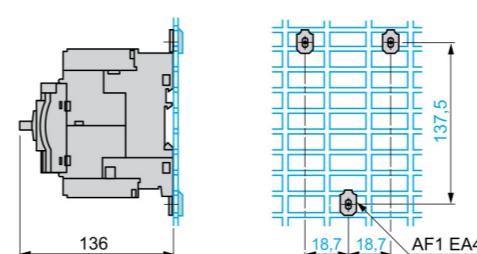

Dimensions, mounting


TeSys protection components

Thermal-magnetic motor circuit-breakers
GV3 P and GV3 ME80


GV3 P (continued)

Busbar systems

Set of busbars GV3 G264



Set of busbars GV3 G364





Note: Leave a space of 9 mm between 2 circuit-breakers: either an empty space or side-mounting add-on contact blocks.
Horizontal mounting is possible up to 40 °C.

3


Mounting of external operator GV3 AP01 or GV3 AP02

Depth 131 mm


Depth 231 to 390 mm

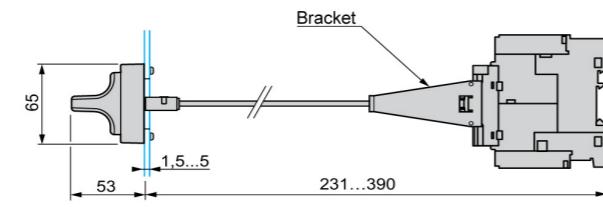

Depth 177 to 230 mm


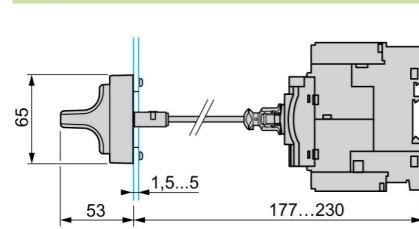


Door cut-out

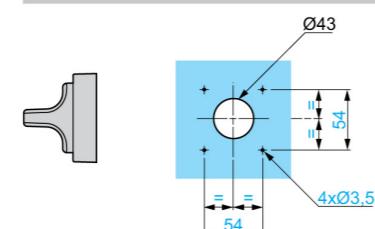

GV3 ME80

Dimensions

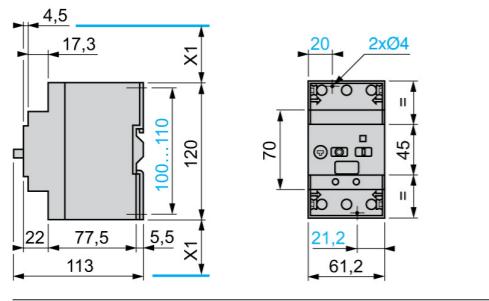

X1 = Electrical clearance (ISC max)



40 mm for Ue ≤ 500 V, 50 mm for Ue ≤ 690 V

Mounting

Mounting on rail AM1 DE200 or AM1 ED201

Panel mounting, using M4 screws

Mounting on pre-slotted plate AM1 PA

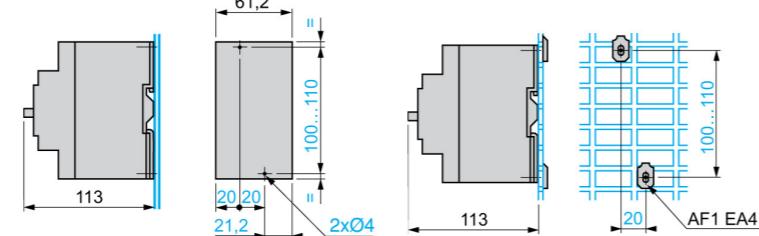


Dimensions, mounting

TeSys protection components

Thermal-magnetic motor circuit-breakers
GV7 R


GV7 R

Dimensions

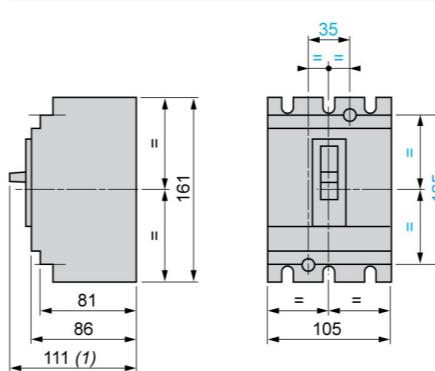

(1) 126 for GV7 R•220.


Motor circuit-breakers with terminal shields or phase barriers
GV7 R + GV7 AC01 or AC04

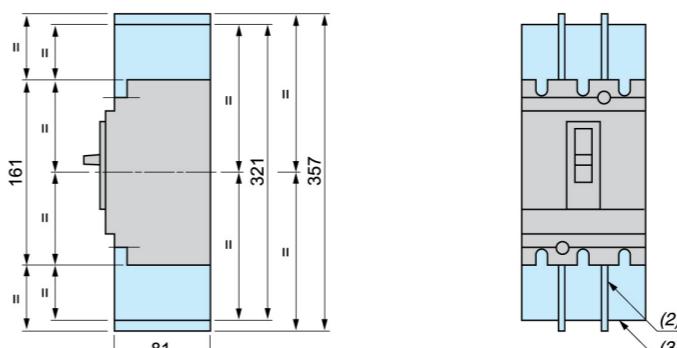

(2) Phase barriers: GV7 AC04


(3) Terminal shields: GV7 AC01

Combination of GV7 R and TeSys contactor LC1 F with kit GV7 AC0•

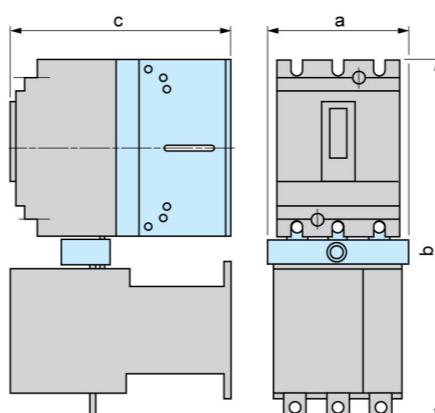

	a	b	c
GV7 R + LC1 F115 or F150 + GV7 AC06	119	334	181
GV7 R + LC1 F185 + GV7 AC06	119	338	188
GV7 R + LC1 F225 + GV7 AC07	131	358	188
GV7 R + LC1 F265 + GV7 AC07	131	364	215
Minimum distance between 2 circuit-breakers mounted side by side = 0			

Minimum electrical clearance

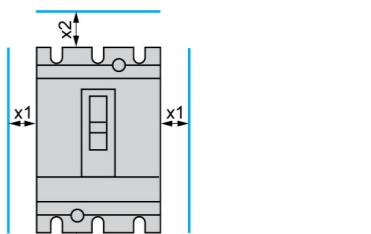


x1 x2
Painted or insulated metal plate, 0 30
insulation or insulated bar

Bare metal plate	U ≤ 440 V	5	35
	440 V < U < 600 V	10	35
	U ≥ 600 V	20	35



**Dimensions,
mounting**

TeSys protection components
Thermal-magnetic motor circuit-breakers
GV7 R

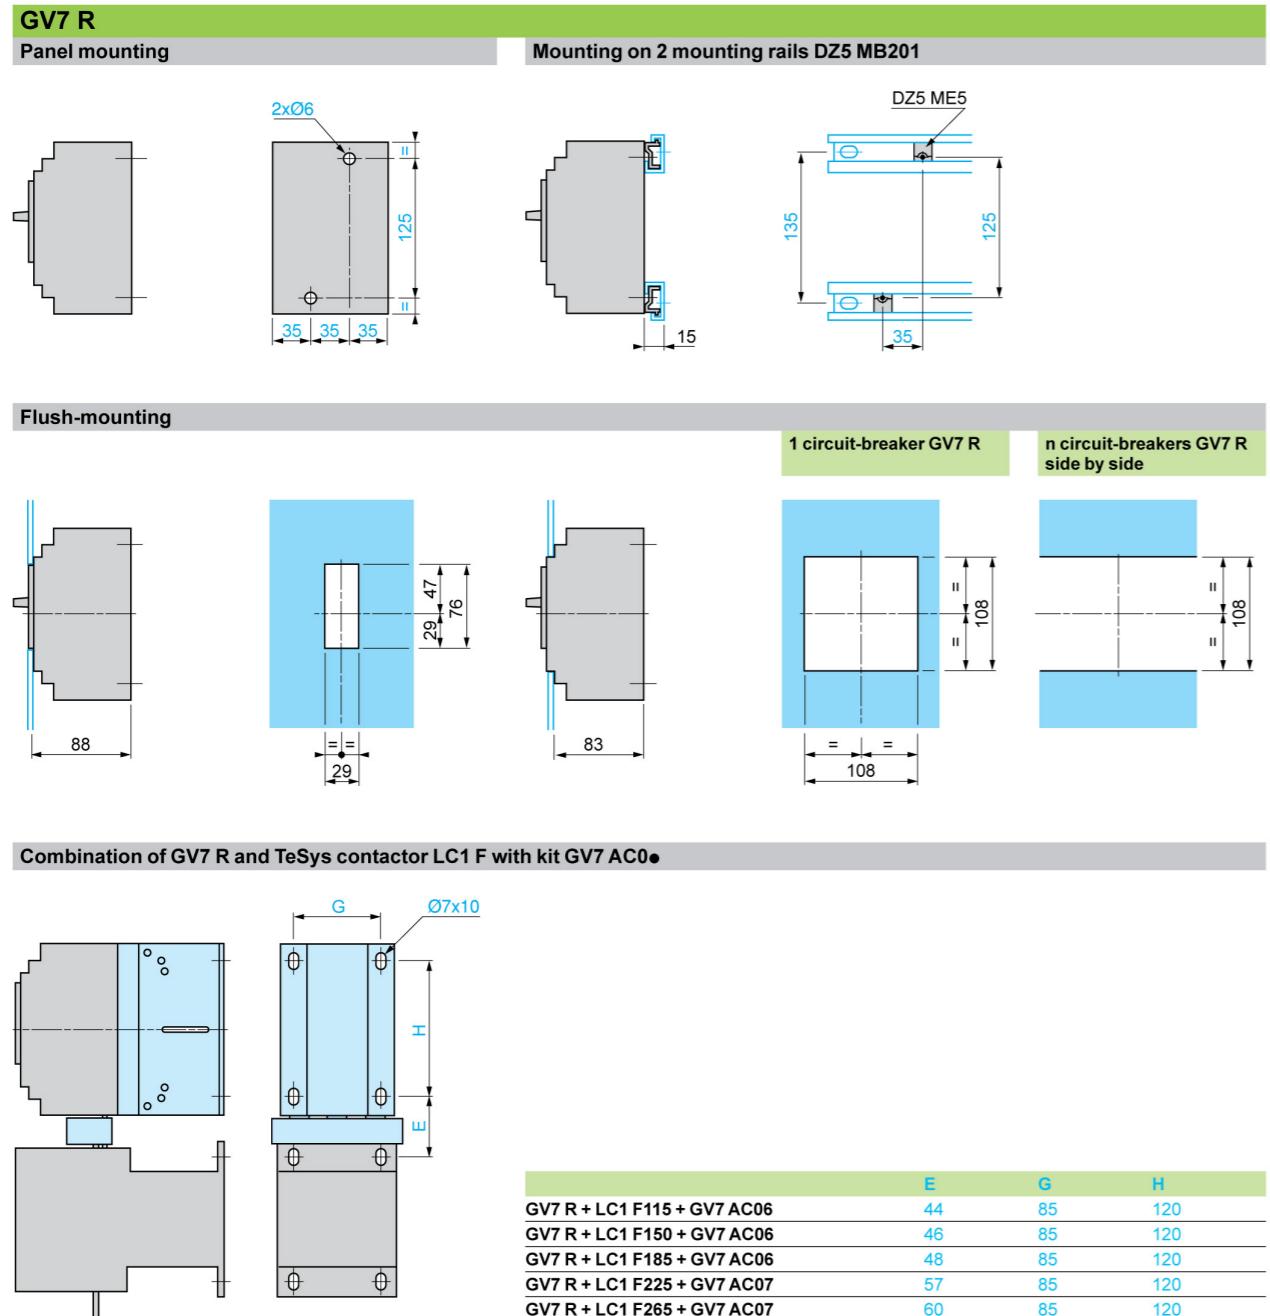


**Dimensions,
mounting (continued)**

TeSys protection components
Thermal-magnetic motor circuit-breakers
GV7 R

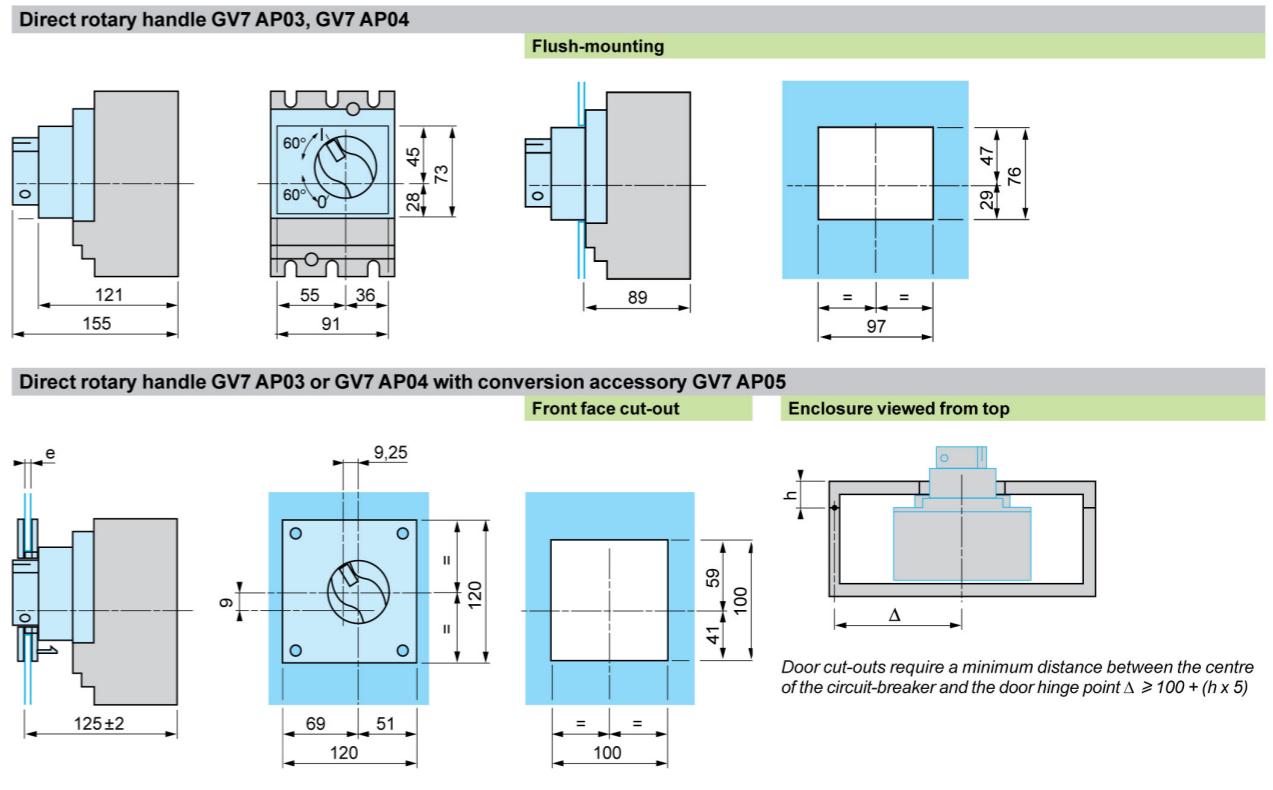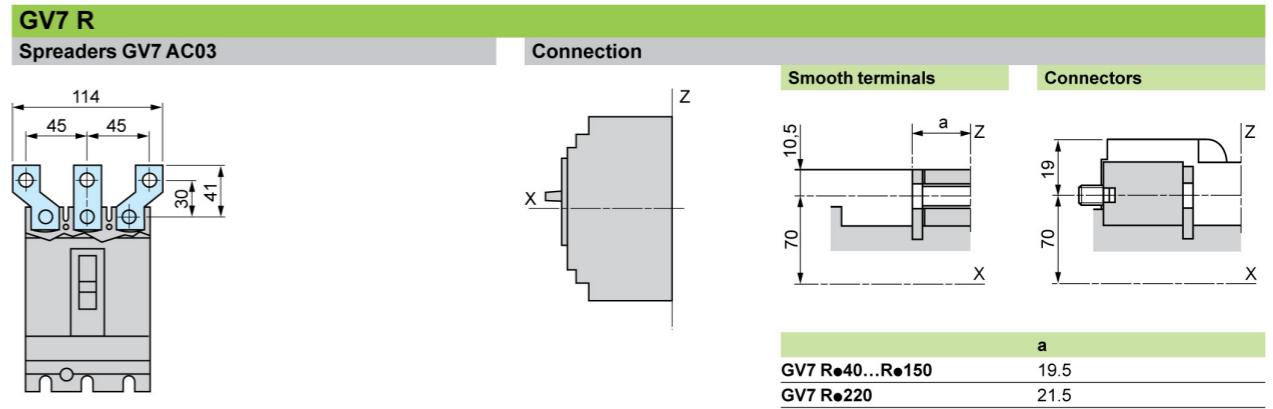

Extended rotary handle GV7 AP01, GV7 AP02

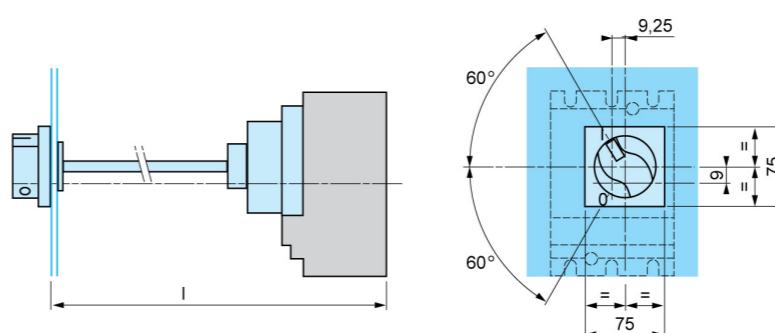


I: 185 min, 600 max
The shaft of the extended rotary handle GV7 AP01 or GV7 AP02 must be cut to length: I = 126 mm.

Schemes

TeSys protection components


Thermal-magnetic motor circuit-breakers
GV2 ME, GV2 P, GV3 P and GV2 RT

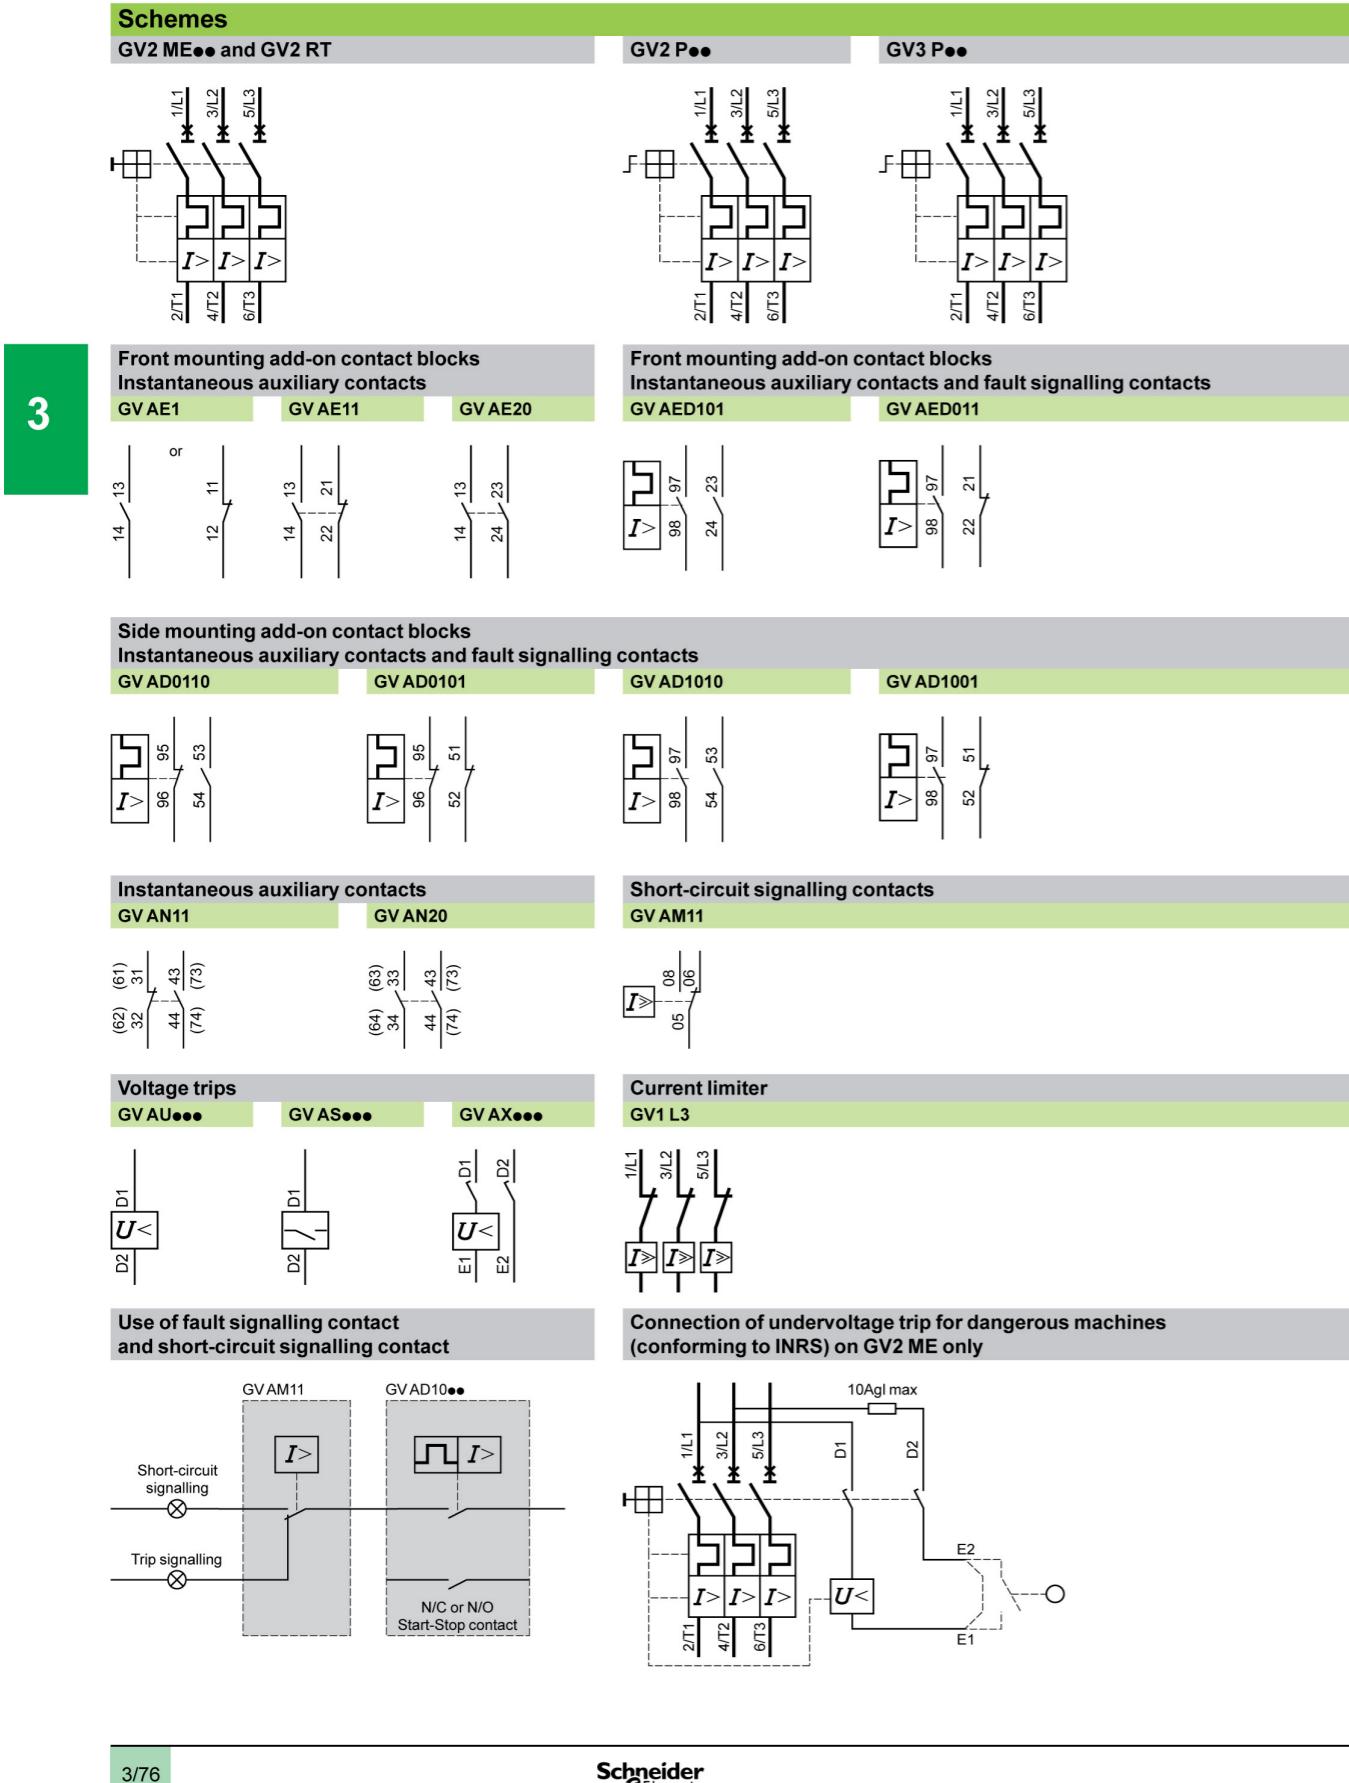

Schemes

TeSys protection components


Thermal-magnetic motor circuit-breakers
GV3 ME80 and GV7 R

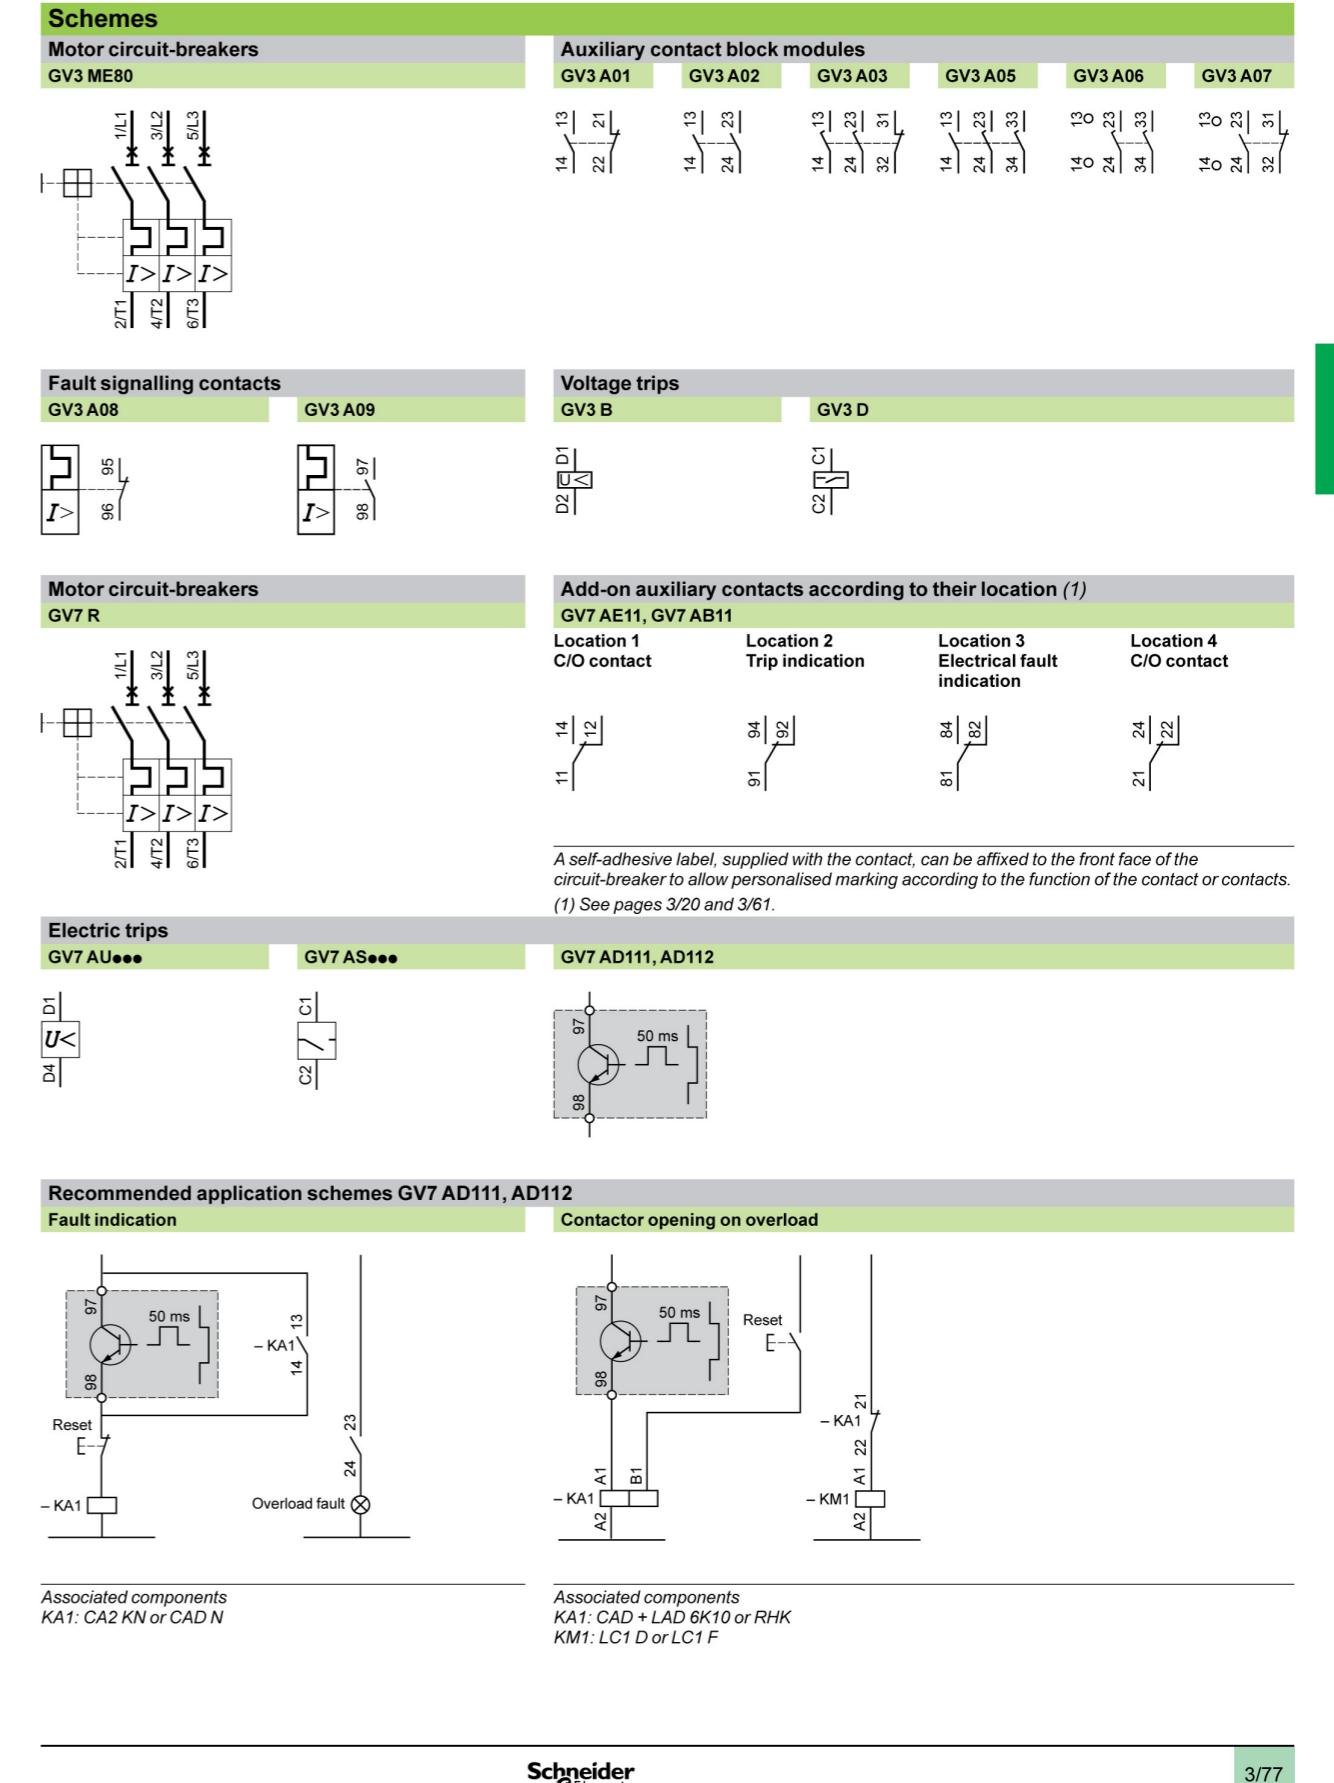

Dimensions, mounting

TeSys protection components


Magnetic motor circuit-breakers
GV2 L and GV2 LE

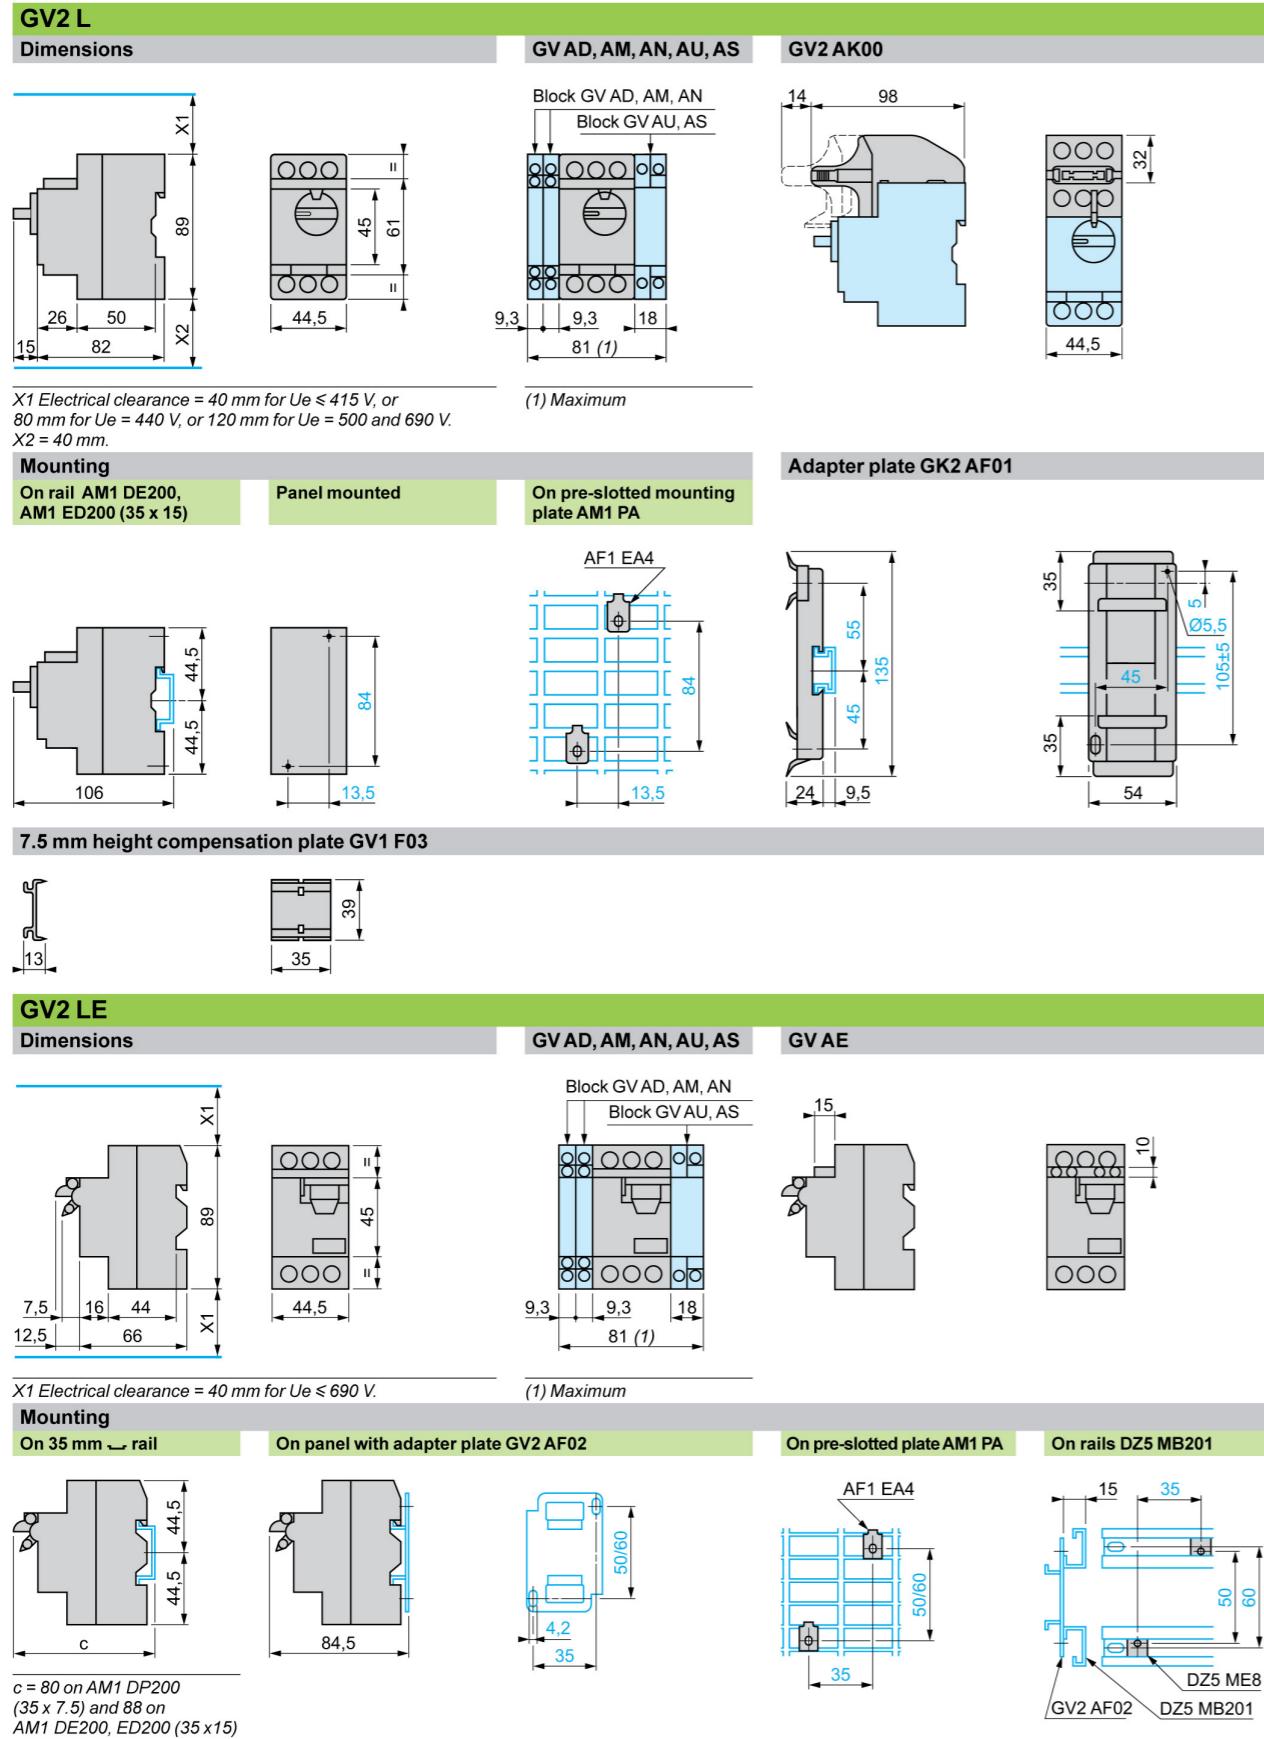

Dimensions, mounting (continued)

TeSys protection components

Magnetic motor circuit-breakers
GV2 L and GV2 LE

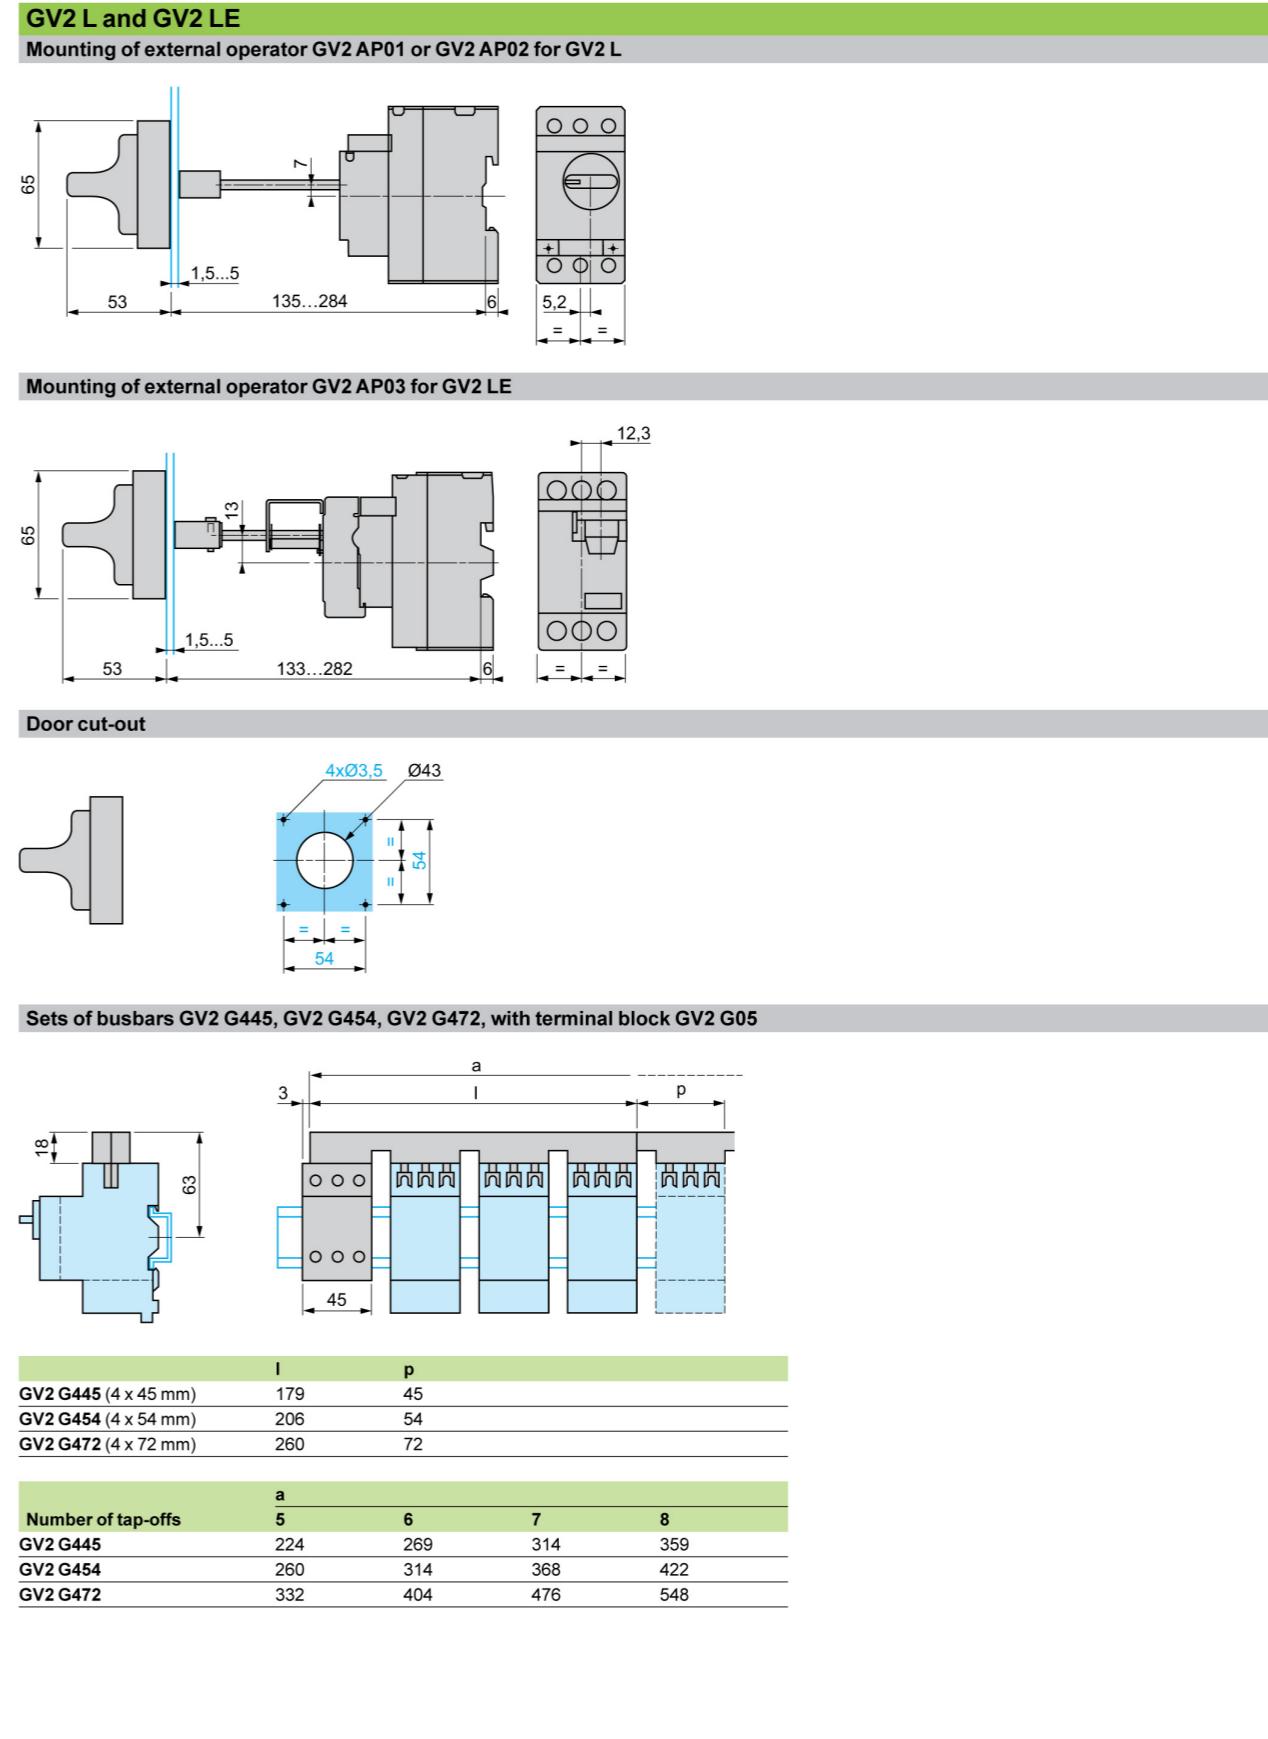

Dimensions, mounting

TeSys protection components

Magnetic motor circuit-breakers
GV2 L, GV2 LE

Dimensions, mounting



TeSys protection components

Magnetic motor circuit-breakers
GV3 L

Sets of busbars for GV2 L and GV2 LE

Sets of busbars GV2 G $\bullet\bullet\bullet$ with term. block GV1 G09


Sets of busbars GV2 G245, GV2 G254, GV2 GR272

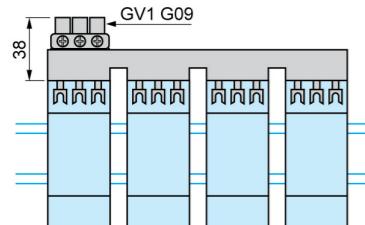

3


GV2 G245 (2 x 45 mm)	I	89
GV2 G254 (2 x 54 mm)		98
GV2 G272 (2 x 72 mm)		116

Set of busbars GV2 G554

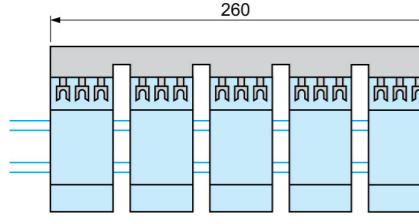


GV2 G345 (3 x 45 mm)	I	134
GV2 G354 (3 x 54 mm)		152

Sets of busbars GV2 G345 and GV2 G354



GV3 L

Dimensions

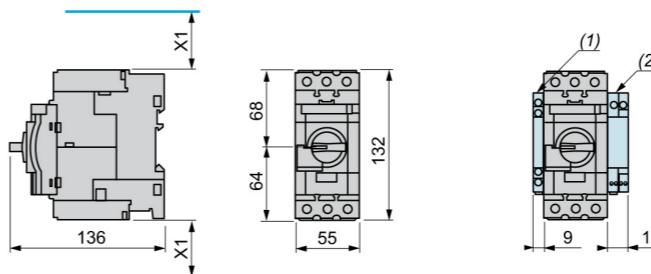

X1 = Electrical clearance (ISC max)
40 mm for Ue ≤ 500 V, 50 mm for Ue ≤ 690 V


(1) Blocks GV AN•••, GV AD••• and GV AM11
(2) Blocks GV3 AU••• and GV3 AS•••

Note: Leave a space of 9 mm between 2 circuit-breakers: either an empty space or side-mounting add-on contact blocks.
Side by side mounting is possible up to 40 °C.


3

Mounting


Mounting with Tesys contactor LC1 D40A...D65A and relay LR3 D313...365

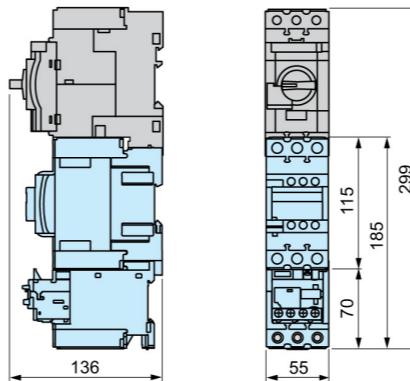


Side by side mounting with Tesys contactor LC1 D40A...D65A
(S-shape busbar system GV3 S)

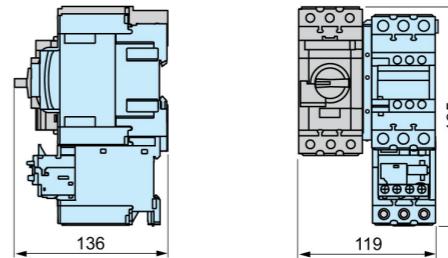


Mounting on rail AM1 DE200 or AM1 ED201




Panel mounting, using M4 screws

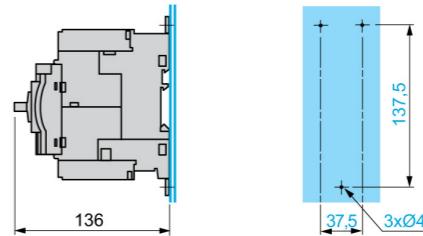


Mounting on pre-slotted plate AM1 PA

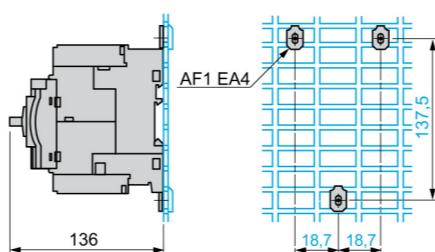

Set of busbars GV3 G264



Set of busbars GV3 G364




**Dimensions,
mounting (continued)**

TeSys protection components
Magnetic motor circuit-breakers
GV3 L and GK3 EF80


GV3 L (continued)

Mounting of external operator GV3 AP01 or GV3 AP02

Depth 131 mm




Depth 231 to 390 mm

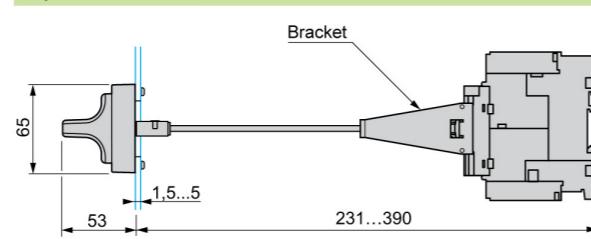


3

Depth 177 to 230 mm

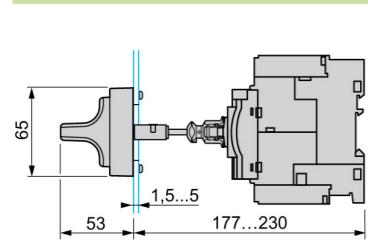


Door cut-out



GK3 EF80

GK3 EF80 + 4 GK2 AX

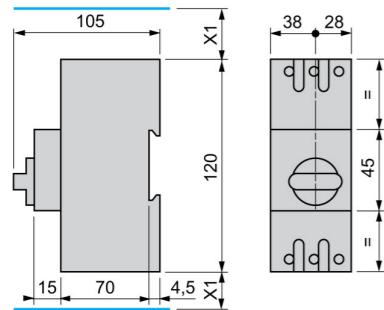

Number of GK2 AX

a	0	1	2	3	4
	66	74.8	83.5	92.5	101

Schemes

TeSys protection components

Magnetic motor circuit-breakers
GV2 L, GV2 LE, GV3 L and GK3 EF80





Magnetic motor circuit-breakers

GV2 L $\bullet\bullet$

GV2 LE $\bullet\bullet$

GV3 L $\bullet\bullet$

GK3 EF80



Accessories




Front mounting add-on contact blocks
Instantaneous auxiliary contacts

GV AE1

GV AE11

GV AE20

GV AED101 and GV AED011



OR



Side mounting add-on contact blocks




Instantaneous auxiliary contacts and fault signalling contacts

GV AD0110

GV ADD101

GV AD1010



GV AD1001



Instantaneous auxiliary contacts

GV AN11

GV AN20




Short-circuit signalling contacts

GV AM11

GV AM11


GV AM11



Voltage trips

GV AU $\bullet\bullet\bullet$

GV AS $\bullet\bullet\bullet$





Start-Stop signalling contact blocks

GV2 AX10

GV2 AX20

GV2 AX50




Fault signalling contact blocks

GV2 AX12

GV2 AX22

GV2 AX52



TeSys protection components

Thermal-magnetic circuit-breakers TeSys GB2
for the protection of control circuits,
solenoid valves and transformers

Applications	Protection of industrial equipment control circuits and of single-phase loads			Protection of transformers		
				Single-phase ≤ 5000 VA/415 V	3-phase ≤ 10 kVA/415 V	
	Primary	Secondary				
3						3
Tripping threshold on short-circuit	5...7 In	12...16 In			About 20 In	
Operational current	0.5 and 1 A	0.5...20 A			0.25...23 A	
Maximum operational voltage	415 V	250 V		415 V	690 V	
Number of poles	1	1 + neutral		2	1 + neutral	3
Breaking capacity (Icu) conforming to IEC 60947-2	50 kA at 415 V	1.5...50 kA at 415 V	1.5...50 kA at 250 V	1.5...50 kA at 415 V	1.5...50 kA at 250 V	15...100 kA at 415 V
Device type	GB2 C	GB2 CB	GB2 CD	GB2 DB	GB2 DB	GB2 CD
Pages	3/91	3/90	3/90	3/90	3/90	3/50

TeSys protection components

Thermal-magnetic circuit-breakers TeSys GB2 for the protection of industrial equipment control circuits

Presentation

GB2 thermal-magnetic circuit-breakers protect and isolate the control circuits of industrial equipment with contactor coils, transformers.... They protect and isolate single-phase auxiliary circuits such as solenoid valves, electro-brakes, battery chargers, supplied from the control circuit voltage.

GB2 CB, GB2 CD, GB2 DB

12 ratings are available, from 0.5 to 20 A, in single-pole (GB2 CB), single-pole + neutral (GB2 CD) and 2-pole (GB2 DB) versions. They have a magnetic tripping threshold set at between 12 and 16 In to withstand the current peaks generated by many industrial components.

GB2 CS

2 ratings are available, 0.5 and 1 A, in single-pole version. The magnetic tripping threshold is set between 5 and 7 In.

Functions, installation

Clip-on fixing onto all types of 35 mm \square rails, on \square rails and on Telequick mounting plates. Upstream and downstream marking by means of AB1 clip-in markers. Clear indication of "I" and "O" positions on the operator. Tamper-proof device which requires no special maintenance (fixed magnetic and thermal tripping thresholds).

Selection for the protection of circuits supplied by transformers

Single-phase transformers.

Magnetising peak: 20 In.

Operation of magnetic trips: 13 In.

Power VA	Primary (1)		Secondary			
	220/240 V	380/415 V	24 V	48 V	110 V	220 V
40	GB2 DB05	GB2 DB05	GB2 CD07	GB2 CD06	GB2 CD05	GB2 CD05
63	GB2 DB05	GB2 DB05	GB2 CD08	GB2 CD07	GB2 CD06	GB2 CD05
100	GB2 DB06	GB2 DB05	GB2 CD10	GB2 CD07	GB2 CD06	GB2 CD05
160	GB2 DB07	GB2 DB06	GB2 CD14	GB2 CD09	GB2 CD07	GB2 CD06
250	GB2 DB07	GB2 DB06	GB2 CD16	GB2 CD12	GB2 CD08	GB2 CD07
400	GB2 DB08	GB2 DB07	GB2 CD22	GB2 CD14	GB2 CD09	GB2 CD07
630	GB2 DB10	GB2 DB08	—	GB2 CD21	GB2 CD12	GB2 CD08
1000	GB2 DB14	GB2 DB09	—	GB2 CD16	GB2 CD10	
1600	GB2 DB20	GB2 DB14	—	—	GB2 CD14	
2000	GB2 DB21	GB2 DB14	—	—	GB2 CD22	GB2 CD16
2500	GB2 DB22	GB2 DB20	—	—	—	GB2 CD20
3000	GB2 DB22	GB2 DB20	—	—	—	GB2 CD21
4000	—	GB2 DB21	—	—	—	GB2 CD22
5000	—	GB2 DB22	—	—	—	—

(1) If the breaking capacity of the GB2 is insufficient, use a GV2 RT with 2 poles connected in series, see page 3/50.

Characteristics

TeSys protection components

Thermal-magnetic circuit-breakers TeSys GB2 for the protection of industrial equipment control circuits

Circuit-breaker type	GB2 CB	GB2 CD	GB2 DB	GB2 CS								
Environment												
Conforming to standards	IEC 60947-1, 947-2, EN 60947-1, 60947-2											
Product certifications	CSA, NEMKO, UL	NEMKO, UL	—	—								
Protective treatment	"TC"											
Degree of protection	Conforming to IEC 60529		IP 20									
Shock resistance	Conforming to IEC 60068-2-27		22 gn for 20 ms									
Vibration resistance	Conforming to IEC 60068-2-6		5 gn (5...110 Hz)									
Ambient air temperature around the device	Storage	°C	-40...+80									
	Operation	°C	-20...+60									
Flame resistance	Conforming to IEC 60695-2-1	°C	960									
Maximum operating altitude	m	3000										
Operating position	In relation to normal vertical mounting plane											
	GB2 CB,CD, CS		GB2 DB									
Cabling												
Solid cable	mm ²	1 x 0.75	1 x 6 or 2 x 4									
Flexible cable with cable end	mm ²	1 x 0.75	1 x 4 or 2 x 2.5									
Tightening torque	N.m	1.2										
Technical characteristics												
Utilisation category	Conforming to IEC 60947-2	A	A	A								
Rated operational voltage (Ue)	Conforming to IEC 60947-2 Conforming to CSA C22-2 Nr 14 and UL 1077	V V	415 (1) 277	250 — 277								
Rated operational frequency	Conforming to IEC 60947-2	Hz	50/60	50/60								
Rated impulse withstand voltage (U _{imp})	Conforming to IEC 60947-2	kV	4	4								
Total power dissipated per pole		W	2	2								
Mechanical and electrical durability	C.O.: Closing - Opening	C.O.	8000	8000								
Operational current correction coefficient (~ or ==)	According to the permissible ambient temperature	°C	-20 1.2	-10 1.15	0	0	+10 1.1	+20 1.05	+30 1	+40 0.95	+50 0.90	+60 0.85
Tripping threshold	Of the magnetic trips		12...16 In	12...16 In	12...16 In	5...7 In						



(1) One GB2 circuit-breaker on each live conductor.

Tripping curves

Average operating time at 20 °C without prior current flow (cold state)

GB2 CB, GB2 CD, GB2 DB

GB2 CS

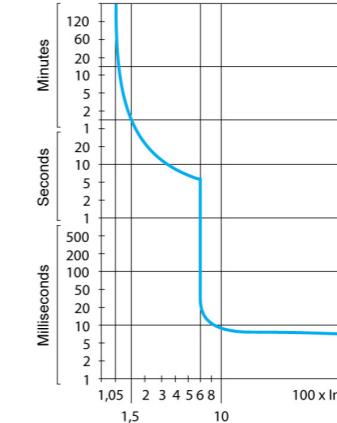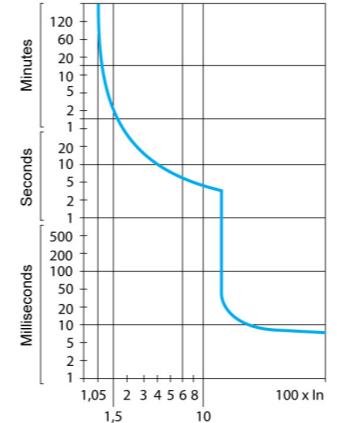

Characteristics (continued)

TeSys protection components

Thermal-magnetic circuit-breakers TeSys GB2 for the protection of industrial equipment control circuits

Circuit-breaker type				GB2													
				CB05	CB06	CB07	CB08	CB09	CB10	CB12	CB14	CB16	CB20	CB21	CB22		
Rating		A	0.5	1	2	3	4	5	6	8	10	12	16	20			
Breaking capacity conforming to IEC 60947-2 ~ 50/60 Hz	110 V	Icu	kA	50	50	15	10	6	3	3	3	2	2	2	2	2	
		Ics % (1)		100	50	50	50	50	75	75	75	75	75	75	75	75	
	230/240 V	Icu	kA	50	50	15	3	3	2	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
		Ics % (1)		25	25	25	50	50	75	75	75	75	75	75	75	75	
	400/415 V	Icu	kA	50	50	15	3	3	2	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
		Ics % (1)		25	25	25	50	50	75	75	75	75	75	75	75	75	
Associated fuses, if required if Isc > breaking capacity Icu conforming to IEC 60947-2	110 V	aM	A	★	★	20	25	25	40	40	50	50	63	63	63	63	
		gG	A	★	★	25	32	32	50	50	63	63	80	80	80	80	
	230/240 V	aM	A	★	★	16	20	20	32	32	40	40	50	50	50	50	
		gG	A	★	★	25	32	32	40	40	50	50	63	63	63	63	
	400/415 V	aM	A	★	★	16	20	20	32	32	40	40	50	50	50	50	
		gG	A	★	★	25	32	32	40	40	50	50	63	63	63	63	
Circuit-breaker type				GB2													
Rating			A	CD05	CD06	CD07	CD08	CD09	CD10	CD12	CD14	CD16	CD20	CD21	CD22		
Breaking capacity conforming to IEC 60947-2 ~ 50/60 Hz	110 V	Icu	kA	50	50	15	10	6	3	3	3	2	2	2	2	2	
		Ics % (1)		100	50	50	50	50	75	75	75	75	75	75	75	75	
	230/240 V	Icu	kA	50	50	15	3	3	2	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
		Ics % (1)		25	25	25	50	50	75	75	75	75	75	75	75	75	
	400/415 V	aM	A	★	★	16	20	20	32	32	40	40	50	50	50	50	
		gG	A	★	★	25	32	32	40	40	50	50	63	63	63	63	
Circuit-breaker type				GB2													
Rating			A	DB05	DB06	DB07	DB08	DB09	DB10	DB12	DB14	DB16	DB20	DB21	DB22		
Breaking capacity conforming to IEC 60947-2 ~ 50/60 Hz	110 V	Icu	kA	50	50	15	10	6	3	3	3	2	2	2	2	2	
		Ics % (1)		100	50	50	50	50	75	75	75	75	75	75	75	75	
	230/240 V	Icu	kA	50	50	15	3	3	2	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
		Ics % (1)		25	25	25	50	50	75	75	75	75	75	75	75	75	
	400/415 V	Icu	kA	50	50	15	3	3	2	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
		Ics % (1)		25	25	25	50	50	75	75	75	75	75	75	75	75	
Associated fuses, if required if Isc > breaking capacity Icu conforming to IEC 60947-2	110 V	aM	A	★	★	20	25	25	40	40	50	50	63	63	63	63	
		gG	A	★	★	25	32	32	50	50	63	63	80	80	80	80	
	230/240 V	aM	A	★	★	16	20	20	32	32	40	40	50	50	50	50	
		gG	A	★	★	25	32	32	40	40	50	50	63	63	63	63	
	400/415 V	aM	A	★	★	16	20	20	32	32	40	40	50	50	50	50	
		gG	A	★	★	25	32	32	40	40	50	50	63	63	63	63	

(1) As % of I_{cu} .
★ Fuse not required. Breaking capacity $I_{cu} > I_{sc}$.

Characteristics (continued)

TeSys protection components

Thermal-magnetic circuit-breakers TeSys GB2 for the protection of industrial equipment control circuits

Circuit-breaker type				GB2											
				••05	••06	••07	••08	••09	••10	••12	••14	••16	••20	••21	••22
Breaking capacity (Icu)	24 V	kA	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
conforming to IEC 60947-2	48 V	kA	1	1	1	1	1	1	1	1	1	1	—	—	—
...															
Operational current	DC-12	24 V	A	0.5	1	2	3	4	5	6	8	10	12	16	20
conforming to IEC 60947-5-1		48 V	A	0.5	1	2	3	4	5	6	8	10	12	16	20
...															
DC-13		24 V	A	0.5	1	2	3	4	5	6	8	10	12	16	20
		48 V	A	0.5	1	2	3	4	5	6	8	—	—	—	—
Circuit-breaker type				GB2											
				CS05						CS06					
Rating			A	0.5						1					
Breaking capacity (Icu)	110 V	Icu	kA	50						50					
conforming to IEC 60947-2		Ics % (1)		100						100					
~ 50/60 Hz															
230/240 V	DC-12	Icu	kA	50						50					
		Ics % (1)		25						25					
400/415 V	(2)	Icu	kA	50						50					
		Ics % (1)		25						25					
Breaking capacity (Icu)	24 V	kA	1.5						1.5						
conforming to IEC 60947-2	48 V	kA	1						1						
...															
Operational current	DC-12	24 V	A	0.5						1					
conforming to IEC 60947-5-1		48 V	A	0.5						1					
...															
DC-13		24 V	A	0.5						1					
		48 V	A	0.5						1					
Maximum permissible line length for star-delta starting (length of cable containing 2 or more conductors)	With contactors LC● D09...D18	Operational voltage	V	48		110		230		48		110		230	
C.s.a.		0.60 mm ²	m	(3)	31		365		6		85		230		
		0.75 mm ²	m	(3)	39		460		8		110		290		
		1 mm ²	m	(3)	52		610		10		145		380		
		1.5 mm ²	m	(3)	78		910		15		220		570		
		2.5 mm ²	m	(3)	130		1520		26		360		950		
		4 mm ²	m	(3)	200		2400		41		580		1500		
With contactors LC● D25...D32		Operational voltage	V	48		110		230		48		110		230	
C.s.a.		0.60 mm ²	m	(3)	(3)		230		(3)		56		230		
		0.75 mm ²	m	(3)	(3)		290		(3)		70		290		
		1 mm ²	m	(3)	(3)		390		(3)		95		380		
		1.5 mm ²	m	(3)	(3)		580		(3)		140		570		
		2.5 mm ²	m	(3)	(3)		970		(3)		230		950		
		4 mm ²	m	(3)	(3)		1500		(3)		375		1500		
With contactors LC● D40...D80		Operational voltage	V	48		110		230		48		110		230	
C.s.a.		0.60 mm ²	m	(3)	(3)		46		(3)		13		100		
		0.75 mm ²	m	(3)	(3)		60		(3)		17		130		
		1 mm ²	m	(3)	(3)		80		(3)		22		170		
		1.5 mm ²	m	(3)	(3)		120		(3)		34		250		
		2.5 mm ²	m	(3)	(3)		190		(3)		56		420		
		4 mm ²	m	(3)	(3)		310		(3)		90		680		

- (1) As % of lcu.
- (2) One **GB2 CS** circuit-breaker on each live conductor
- (3) Use relays

References



GB2 CB••



GB2 CD••



GB2 DB••

Circuit-breakers with magnetic tripping threshold: 12 to 16 In

Single-pole		Magnetic tripping current Id ± 20 %	Sold in lots of	Unit reference	Weight
A	A				
0.5	6.6	6	GB2 CB05	0.060	
1	14	6	GB2 CB06	0.060	
2	26	6	GB2 CB07	0.060	
3	40	6	GB2 CB08	0.060	
4	52	6	GB2 CB09	0.060	
5	66	6	GB2 CB10	0.060	
6	83	6	GB2 CB12	0.060	
8	108	6	GB2 CB14	0.060	
10	138	6	GB2 CB16	0.060	
12	165	6	GB2 CB20	0.060	
16	220	6	GB2 CB21	0.060	
20	270	6	GB2 CB22	0.060	

Single-pole + neutral

Single-pole + neutral		Magnetic tripping current Id ± 20 %	Sold in lots of	Unit reference	Weight
A	A				
0.5	6.6	6	GB2 CD05	0.070	
1	14	6	GB2 CD06	0.070	
2	26	6	GB2 CD07	0.070	
3	40	6	GB2 CD08	0.070	
4	52	6	GB2 CD09	0.070	
5	66	6	GB2 CD10	0.070	
6	83	6	GB2 CD12	0.070	
8	108	6	GB2 CD14	0.070	
10	138	6	GB2 CD16	0.070	
12	165	6	GB2 CD20	0.070	
16	220	6	GB2 CD21	0.070	
20	270	6	GB2 CD22	0.070	

2-pole

2-pole		Magnetic tripping current Id ± 20 %	Sold in lots of	Unit reference	Weight
A	A				
0.5	6.6	3	GB2 DB05	0.115	
1	14	3	GB2 DB06	0.115	
2	26	3	GB2 DB07	0.115	
3	40	3	GB2 DB08	0.115	
4	50	3	GB2 DB09	0.115	
5	66	3	GB2 DB10	0.115	
6	83	3	GB2 DB12	0.115	
8	108	3	GB2 DB14	0.115	
10	138	3	GB2 DB16	0.115	
12	165	3	GB2 DB20	0.115	
16	220	3	GB2 DB21	0.115	
20	270	3	GB2 DB22	0.115	

(1) Conforming to IEC 60947-1.

References (continued), dimensions, schemes

Circuit-breakers with magnetic tripping threshold: 5 to 7 In

Single-pole		Conventional rated thermal current Ith (1)	Magnetic tripping current Id ± 20 %	Sold in lots of	Unit reference	Weight
A	A					
0.5	3.3	6	GB2 CS05	0.055		
1	6	6	GB2 CS06	0.055		


(1) Conforming to IEC 60947-1.

Accessories for circuit-breakers GB2-CB, DB and CS

Description	Sold in lots of	Unit reference	Weight
Busbar set for supply to 10 GB2 DB or 20 GB2 CB or GB2 CS with 2 connectors	1	GB2 G210	0.100
Supply connector	10	GB2 G01	—

Dimensions

GB2 CB••, GB2 CD••, GB2 CS••

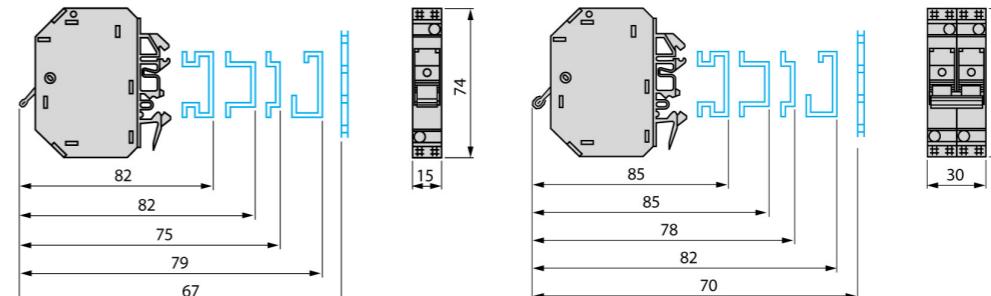

Marking: up to twelve AB1 R clip-in markers.

Schemes

GB2 CB•• GB2 CD•• GB2 DB•• GB2 CS••

